MIL-T-55156
16 JANUARY 1962
SUPERSEDING
(SEE SEC. 6)

MILITARY SPECIFICATION

TERMINALS, LUG; SPLICES, CONDUCTOR; SCREW TYPE, GENERAL SPECIFICATION FOR


This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 Scope. This specification covers the general requirements for screw-type lug terminals and conductor splices for solid and stranded copper conductors.

1.2 Classification.

1.2.1 *Type designation.* The type designation shall be in the following form, and as specified (see 3.1 and 6.1):

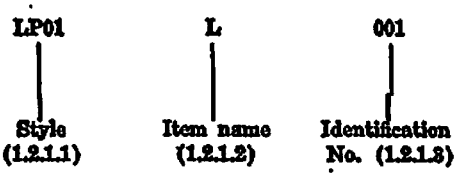

1.2.1.1 *Style.* The style is identified by the two-letter symbol "LP" followed by a two-digit number; the letters identify screw-type lug terminals and conductor splices, and the number denotes the slash number of the detail specification covering the particular style. When the slash number is less than 10, the first digit shall be a zero. For example, style "LP01" is covered in Detail Specification MIL-T-55156/1.

1.2.1.2 *Item name.* The item name is identified by a single letter in accordance with table I.

TABLE I. *Item name*

Symbol	Item name
L	Lug terminal.
S	Conductor splice.

1.2.1.3 *Identification number.* The identification number refers to the item number appearing on figure 1 of the applicable detail specification (see 1.2.1.1). When the item number is less than 10, the first two digits shall be zeros. For example, "001" refers to item No. 1. When the item No. is 10 to 99, inclusive, the first digit shall be a zero. For example, "010" refers to item No. 10.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

PPP-B-566 — Boxes, Folding, Paperboard.

PPP-B-585 — Boxes; Wood, Wirebound.

PPP-B-591 — Boxes, Fiberboard, Wood-Cleated.

PPP-B-601 — Boxes, Wood, Cleated-Plywood.

PPP-B-621 — Boxes, Wood, Nailed and Lock-Corner.

PPP-B-636 — Box, Fiberboard.

PPP-B-665 — Boxes; Paperboard, Metal Stayed (Including Stay Material).

PPP-B-676 — Boxes, Setup, Paperboard.

PPP-T-76 — Tape, Pressure-Sensitive Adhesive Paper, Water-Resistant, (for Carton Sealing).

PPP-T-97 — Tape; Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116 — Preservation, Methods of.

MIL-B-10377 — Box, Wood, Cleated, Veneer, Paper Overlaid.

MIL-L-10547 — Liners, Case, Waterproof.

(For applicable detail specifications, see Supplement 1.)

STANDARDS

MILITARY

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129 — Marking for Shipment and Storage.

MIL-STD-202 — Test Methods for Electronic and Electrical Component Parts.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

NATIONAL BUREAU OF STANDARDS
Handbook H-28 — Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington 25, D. C.)

OFFICIAL CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules.

(Application for copies should be addressed to the Official Classification Committee, One Park Ave., at 33rd St., New York 16, N. Y.)

3. REQUIREMENTS

3.1 Detail requirements for individual types of lug terminals and conductor splices. Detail requirements or exceptions applicable to individual types of lug terminals and conductor splices shall be as specified in the detail specifications listed in Supplement 1 to this specification. In the event of any

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

conflict between requirements of this specification and the detail specifications, the latter shall govern (see 6.1).

3.2 Material. The metal used in the body and other current-carrying parts of lug terminals and conductor splices shall be copper or a copper alloy containing not more than 7 percent zinc. The metal used in the hardware shall be a type which will enable the lug terminals and conductor splices to meet the performance requirements of this specification. Acceptance or approval of any constituent material shall not be construed as a guaranty of the acceptance of the finished product.

3.3 Design and construction. Lug terminals and conductor splices shall be of the design, construction, and physical dimensions specified (see 3.1). A method of preventing the screw or bolt from impinging directly on the conductor or conductors, as applicable (see 3.1), shall be provided.

3.3.1 *Conductor accommodation.* The conductor accommodation shall be designed for connection to the applicable conductor diameter range specified in table II. The conductor diameter range may be found in table II by means of the terminal size given in the detail specification (see 3.1). Lug terminals and conductor splices designed for use on several conductor sizes shall perform satisfactorily on all sizes for which designed.

3.3.2 *Plating.* Lug terminals and conductor splices shall be unplated.

3.3.3 *Threaded parts.* All threaded parts shall be in accordance with Handbook H28, and shall be a class 2 fit.

3.4 Torque. When lug terminals and conductor splices are tested as specified in 4.6.2, there shall be no evidence of breaking, distortion, or other damage.

TABLE II. *Terminal sizes*

Terminal size	Conductor diameter range	Marking (see 3.10)
	Inches, incl	
14		
12 - 10 9	0.064 to 0.146	8 STR - 14 S
9		N4 - 14
8		
6 8 - 5	0.146 to 0.236	4 - 8 STR
5		N23 - 40
4		
3 4 - 2	0.231 to 0.351	1 - 4 STR
2		N50 - 75
1 - 0	0.363 to 0.441	1/0 - 2/0 STR
		N100 - 125
00 - 000	0.457 to 0.548	3/0 - 4/0 STR
		N150 - 200
0000 - 350 MCM	0.575 - 0.719	250 - 350
400 - 550 MCM	0.742 - 0.871	400 - 500
650 - 800 MCM	0.936 - 1.068	650 - 800
1,000 MCM	1.180	1000
1,600 - 2,000 MCM	1.459 - 1.670	1600 - 2000

3.5 Voltage drop. When lug terminals and conductor splices are tested as specified in 4.6.3, the voltage drop shall be as specified (see 3.1).

3.6 Current cycling. When lug terminals and conductor splices are tested as specified in 4.6.4, the voltage drop shall be as specified in 3.5.

3.7 Vibration. When lug terminals and conductor splices are tested as specified in 4.6.5, there shall be no evidence of cracking, breaking, loosening of parts, nor shall there be any damage to the conductor, or conductors, as applicable (see 3.1). The voltage drop shall be as specified in 3.5.

3.8 Salt spray (corrosion). When lug terminals and conductor splices are tested as specified in 4.6.6, there shall be no corrosion which interferes with the electrical or mechanical performance. The voltage drop shall be as specified in 3.5.

3.9 Tensile strength. When lug terminals and conductor splices are tested as specified in 4.6.7, the tensile strength shall be as specified (see 3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

3.10 Marking. Lug terminals and conductor splices shall be marked with the terminal size (see 8.1 and table II), and, when applicable, with the circuit-breaker frame size. The marking shall be legibly molded or stamped on the surface.

3.11 Workmanship. Lug terminals and conductor splices shall be processed in such a manner as to be free from defects that will affect life, serviceability, or appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.

4.1.1 *Supplier*. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1.1 *Test equipment and inspection facilities*. Test equipment and inspection facilities shall be of sufficient accuracy, quality, and quantity to permit performance of the required inspection. The supplier shall establish calibration of inspection equipment to the satisfaction of the Government.

4.2 Classification of inspection. The examination and testing of lug terminals and conductor splices shall be classified as follows:

(a) Component - materials inspection (see 4.3).

(b) Acceptance inspection (see 4.5).
1. Inspection of product for delivery (see 4.5.1).
2. Inspection of preparation for delivery (see 4.5.2).

4.3 Component-materials inspection. Component-materials inspection shall consist of verification that the component materials used in fabricating the lug terminals and conductor splices are in accordance with the applicable requirements prior to such fabrication (see 3.2).

4.4 Inspection conditions. Unless otherwise specified herein, all inspection shall be made at room ambient temperature, relative humidity, and pressure.

4.5 Acceptance inspection.

4.5.1 *Inspection of product for delivery*. Inspection of product for delivery shall consist of groups A and B.

4.5.1.1 *Inspection lot*. An inspection lot, as far as practicable, shall consist of all the lug terminals or conductor splices of the same type designation, produced under essentially the same conditions, and offered for inspection at one time.

4.5.1.2 *Resubmitted lots*. If an inspection lot is rejected, the supplier may replace it with a new lot, rework it to correct the defects, or screen out the defective units, and submit it again to inspection. Resubmitted lots shall be kept separate from new lots and shall be clearly identified as resubmitted lots. Resubmitted lots shall be inspected, using tightened inspection.

4.5.1.3 *Group A inspection*. Group A inspection shall consist of examinations specified in table III, and shall be made on the same set of sample units.

4.5.1.3.1 *Sampling plan*. The sampling plan shall be in accordance with Standard MIL-STD-105 for small-sample inspection. The acceptable quality levels (AQL) shall be as specified in table III, and the inspection level shall be I-4. Major and minor defects shall be as defined in Standard MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

TABLE III. *Group A inspection*

Examination	Requirement paragraph	Method paragraph	AQL (% defective)	
			Major	Minor
Visual and mechanical examination	3.1, 3.3 to 3.3.3 incl, 3.10, and 3.11	4.6.1	1.5	6.5

4.5.1.4 *Group B inspection.* Group B inspection shall consist of the tests specified in table IV, in the order shown.

TABLE IV. *Group B inspection*

Test	Requirement paragraph	Method paragraph
Torque	3.4	4.6.2
Voltage drop	3.5	4.6.3
Current cycling	3.6	4.6.4
Vibration	3.7	4.6.5
Salt spray (corrosion) ...	3.8	4.6.6
Tensile strength	3.9	4.6.7

4.5.1.4.1 *Sampling plan.* Four sample units of each type designation shall be selected from the first lot, and once every 6 months thereafter from a current lot. No failures shall be allowed.

4.5.1.4.2 *Disposition of sample units.* Sample units which have been subjected to group B inspection shall not be delivered on the contract order.

4.5.1.4.3 *Noncompliance.* If a sample fails to pass group B inspection, the supplier shall take corrective action on the materials or process, or both, as warranted, and on all units of product which can be corrected and which were manufactured under essentially the same conditions, with essentially the same materials, processes, etc, and which are considered subject to the same failure. Acceptance of the product shall be discontinued until corrective action, acceptable to the Government, has been taken. After the corrective action has been taken, group B inspection shall be repeated on additional sample units (all inspection, or the inspection which the original sample failed, at the option of the Government). Group A inspection may be reinstituted; however, final acceptance shall be withheld until the group B reinspection has shown that the corrective action was successful. In the event of failure after reinspection, information concerning the failure and the corrective action taken shall be furnished to the contracting officer.

4.5.2 *Inspection of preparation for delivery.* Sample items and packs shall be selected and inspected in accordance with Specification MIL-P-116 to verify conformance with requirements in section 5 of this specification.

4.6 Methods of examination and test.

4.6.1 *Visual and mechanical examination.* Lug terminals and conductor splices shall be examined to verify that the design, construction, physical dimensions, marking, and workmanship are in accordance with the applicable requirements (see 3.1, 3.3 to 3.3.3, incl, 3.10, and 3.11).

4.6.2 *Torque.* Lug terminals and conductor splices, mounted by normal mounting means, shall have the tightening torque, as specified in table V, as applicable, applied to the clamp nut or bolt, as applicable.
Lug terminals and conductor splices shall then be examined for evidence of breaking, distortion, or other damage (see 3.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

TABLE V. *Tightening torque*

Terminal size	Torque
	lb ft
14	4.5
12-10	5.0
9	6.0
8	7.0
6	8.0
5	9.5
4	11.0
3	12.0
2	14.0
1	17.0
0	19.5
00	21.5
000	25.0
0000	28.5
300 MCM	31.0
350 MCM	34.0
400 MCM	36.0
600 MCM	40.5
650 MCM	46.0
700 MCM	47.0
750 MCM	49.0
900 MCM	51.5
1,100 MCM	59.5
1,250 MCM	76.0
1,500 MCM	91.0
1,600 MCM	98.0
1,750 MCM	110.0
2,000 MCM	125.0

4.6.3 *Voltage drop (3.5).* Lug terminals and conductor splices, with a suitable conductor, or conductors, as applicable (see 3.1), connected, shall be suspended in free air with a minimum clearance of 18 inches. The voltage-drop measurement shall be made while the rated current (see 3.1) is being applied and after the temperature of the conductor has stabilized. The points of measurement shall be as specified in table VI, as applicable (see 3.1 and 3.5).

4.6.4 *Current cycling.* Lug terminals and conductor splices shall be connected to an 18-inch length of suitable conductor, or conductors, as applicable (see 3.1). Lug terminals and conductor splices shall then be subjected to 125 percent of rated current (see 3.1) for 50 cycles. (A cycle shall consist of 30 min. of applied test current followed by 15 min. of no load.) Following cycling, voltage drop shall be measured as specified in 4.6.3 (see 3.6).

4.6.5 *Vibration (3.7).* Lug terminals and conductor splices shall be tested in accordance with method 201 of Standard MIL-STD-202. The following details and exceptions shall apply:

(a) Tests and measurements prior to vibration — Not applicable.

(b) Method of mounting — Rigidly secured to the vibration platform. A suitable conductor, or conductors, as applicable, (see 3.1), 18 inches long, shall be connected to the lug terminal or conductor splice and secured to a stable support. Any slack shall be removed from the conductor.

(c) Direction of motion — In each of two directions perpendicular to the axis of the conductor and perpendicular to each other.

(d) Examination and measurement after vibration — Lug terminals and conductor splices shall be visually examined for evidence of cracking, breaking, and loosening of parts. The conductor, or conductors, as applicable, shall be examined for damage. Upon completion of the examination, voltage drop shall be measured as specified in 4.6.3.

4.6.6 *Salt spray (corrosion) see (3.8).* Lug terminals and conductor splices shall be tested in accordance with method 101 of Standard MIL-STD-202. The following details and exception shall apply:

(a) Test-condition letter — A.

(b) Examination and measurement after exposure — Lug terminals and conductor splices shall be examined for corrosion which interferres with the electrical or mechanical performance. Upon completion of the examination, voltage drop shall be measured as specified in 4.6.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

TABLE VI. *Test points*

Lug terminals or conductor splices	Test point No. 1	Test point No. 2
Lug terminals (see 3.1)	Receiving end of the lug terminal.[1]	Intersection of the tongue and conductor accommodation.
Parallel conductor splices (see 3.1)	One end of the conductor splice.[1]	Opposite end of the conductor splice.[1]
Tee conductor splices (see 3.1)	Current-carrying tap conductor.[1]	Current-carrying run conductor.[1]

[1] The conductor insulation shall be punctured ¼ inch from its entrance to the lug terminal or conductor splice, as applicable.

4.6.7 *Tensile strength.* Lug terminals and conductor splices, with a suitable conductor, or conductors, as applicable (see 3.1), connected shall be tested on a tensile testing machine. The travel speed of the head shall be ½ inch per minute. The clamping surfaces may be serrated to provide sufficient clamping force. Tensile strength shall be measured between the conductor, or conductors, as applicable, and the lug terminal or conductor splice, as applicable (see 3.9).

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging (see 6.1).

5.1.1 *Level A.* Unless otherwise specified (see 6.1), lug terminals and conductor splices shall be protected and unit-packaged in accordance with method III of Specification MIL-P-116. The quantity to be included in the unit package shall be as specified (see 6.1). Unless otherwise specified (see 6.1), five unit packages or a multiple thereof shall be further packaged in intermediate containers conforming to Specification PPP-B-566, class 1 of PPP-B-636, PPP-B-665, or PPP-B-676. The gross weight of the intermediate container shall not exceed 10 pounds.

5.2.1 *Level C.* Lug terminals and conductor splices shall be afforded preservation and packaging in accordance with the supplier's normal commercial practice.

5.2 Packing (see 6.1).

5.2.1 *Level A.* Lug terminals and conductor splices packaged as specified (see 6.1) shall be packed in overseas-type wirebound wood, wood-cleated fiberboard, wood-cleated plywood, nailed wood, fiber (class 2), or wood-cleated paper-overlaid boxes conforming to Specifications PPP-B-585, PPP-B-591, PPP-B-601, PPP-B-621, PPP-B-636, or MIL-B-10377, respectively. Shipping containers shall have case liners conforming to Specification MIL-L-10547; the case liners shall be closed and sealed in accordance with the appendix thereto. Case liners for boxes conforming to Specification PPP-B-636 will not be required provided the center and edge seams and manufacturer's joints are sealed with tape, at least 1½ inches wide, conforming to Specification PPP-T-76. Box closures and strapping shall be as specified in the applicable box specification or appendix thereto. Fiber boxes conforming to Specification PPP-B-636 may be banded with tape conforming to type IV of Specification PPP-T-97 and appendix thereto in lieu of steel straps. The gross weight of wood boxes shall not exceed 200 pounds; fiberboard boxes shall not exceed the weight limitations of the applicable box specification.

5.2.2 *Level B.* Lug terminals and conductor splices packaged as specified (see 6.1) shall be packed in domestic-type wirebound wood,

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

wood-cleated fiberboard, wood-cleated plywood, nailed wood, fiber (class 1 or 2, as specified (see 6.1)), or wood-cleated paper-overlaid boxes conforming to Specifications PPP-B-585, PPP-B-591, PPP-B-601, PPP-B-621, PPP-B-636, or MIL-B-10377, respectively. Box closures shall be as specified in the applicable box specification or appendix thereto. The gross weight of wood boxes shall not exceed 200 pounds; fiberboard boxes shall not exceed the weight limitations of the applicable box specification.

5.2.3 *Level C.* Lug terminals and conductor splices packaged as specified (see 6.1) shall be packed in containers of the type, size, and kind commonly used for the purpose, in a manner that will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with the Uniform Freight Classification Rules, or regulations of other carriers as applicable to the mode of transportation.

5.2.4 *General.* Insofar as possible and practical, exterior containers shall be uniform in shape and size, shall be of minimum cube and tare consistent with the protection required, and shall contain identical quantities of identical items.

5.3 Marking. In addition to any special marking required by the contract or order, unit packages, intermediate packages, and exterior shipping containers shall be marked in accordance with Standard MIL-STD-129 (see 6.1).

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Title, number, and date of the applicable detail specification, and the complete type designation (see 1.2.1 and 3.1).

(c) Levels of preservation and packaging and packing, and applicable marking (see sec. 5).

(d) Method of preservation and packaging of Specification MIL-P-116, if other than method III (see 5.1.1).

(e) Quantity to be included in the unit package (see 5.1.1).

(f) Number of unit packages if other than that specified in 5.1.1.

(g) Class of fiber (see 5.2.2).

6.1.1 *Indirect shipments.* The packaging, packing, and marking specified in section 5 apply only to direct purchases by or direct shipments to the Government and are not intended to apply to contracts or orders between the supplier and prime contractor.

6.2. Supersession data. This specification supersedes that part of Specification MIL-E-16366D(SHIPS), dated 23 June 1959, which covers screw-type lug terminals and conductor splices.

6.3 Cross index of styles. The lug terminals and conductor splices contained herein are cross indexed to those covered by Specification MIL-E-16366(SHIPS), as shown in table VII.

TABLE VII. *Cross index of styles.*[1]

MIL-T-	MIL-E-16366(SHIPS)
Style	Type
LP01	CLS
LP02	CLS
LP03	CCBS
LP04	CCPS
LP05	CCTS
LP06	CBCS
LP07	CLSS
LP08	CLSS

[1] The styles of Specification MIL-T- are mutually interchangeable with the corresponding type in Specification MIL-E-16366 (SHIPS).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army—SigC
Navy—Ships
Air Force

Preparing activity:
Army—SigC

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.