
MILITARY SPECIFICATION SHEET

CABLE, ELECTRIC, FILTER LINE, SHIELDED, JACKETED, RADIO FREQUENCY ABSORPTIVE, 150°C, 600-VOLT

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Specification MIL-C-85485.

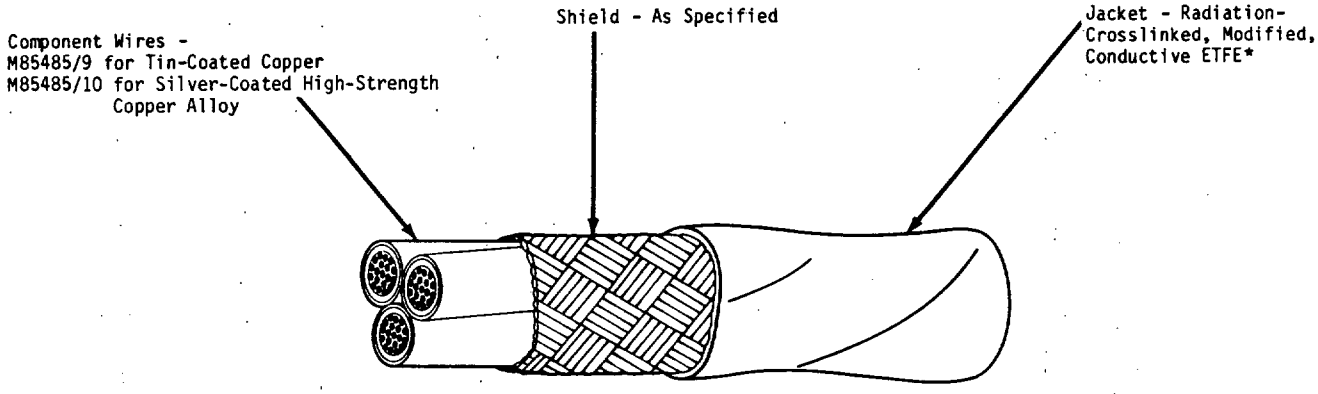

*ETFE - Ethylene-Tetrafluoroethylene Copolymer

FIGURE 1. TYPICAL CONFIGURATION

RATINGS:

TEMPERATURE RATING: 150°C (302°F) maximum continuous conductor temperature.
VOLTAGE RATING: 600 volts (rms) at sea level.

ADDITIONAL REQUIREMENTS:

ATTENUATION (INSERTION LOSS): Consult QPL source for details.
BLOCKING: 200° ± 3°C (392° ± 5°F) for 6 hours
COLOR STRIPING DURABILITY: 125 cycles (250 strokes) (min), 500 grams weight.
CROSSLINKING PROOF TEST: 7 hours at 300° ± 3°C (572° ± 5°F).
FLAMMABILITY: 3 seconds (max); 3 inches (max).
IDENTIFICATION DURABILITY: 125 cycles (250 strokes) (min), 500 grams weight.
IMMERSION: Diameter increase 5% (max); no cracking of jacket.
JACKET COLOR: Black
JACKET CONCENTRICITY: 70% (min)
JACKET ELONGATION AND TENSILE STRENGTH: Elongation, 50% (min)
Tensile strength, 3500 lbf/in^2 (min)
JACKET FLAWS: Not applicable.
LIFE CYCLE: 168 hours at 200° ± 3°C (392° ± 5°F)
LOW TEMPERATURE-COLD BEND: -65° ± 2°C (-85° ± 4°F) for 4 hours
SHIELD COVERAGE AND ANGLE: 85% (min) coverage; 18° (min), 40° (max) angle
SHIELD SIZE: 38 AWG round wire strands
SURFACE TRANSFER IMPEDANCE, EFFECTIVE: Consult QPL source for details.
THERMAL SHOCK RESISTANCE: Oven temperature, 150° ± 3°C (302° ± 5°F)
Maximum change in measurements, 0.125 inch
THERMAL STABILITY: 1250 hours at 180° ± 3°C (356° ± 5°F)
Voltage withstand (dielectric) - no breakdown. Shall meet stop band attenuation requirements for the applicable component wire size and number of components. Consult QPL source for details.
VOLTAGE WITHSTAND (DIELECTRIC): Conductor to shield, 1500 volts (rms), 60 Hz
VOLTAGE WITHSTAND (POST-ENVIRONMENTAL): Not applicable.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:56Z
Check the source to verify that this is the current version before use.

TABLE I. CONSTRUCTION DETAILS

Part No. 1/	Conductor Size	Number of Conductors	Jacket Thickness (in.)		Outside Diameter (in.)		Maximum Weight (lbs/1000 ft.)
			(min)	(nom)	(nom)	(max)	
M85485/12-24*1†	24	1	.0060	.008	.077	.084	7.3
M85485/12-22*1†	22	1	.0060	.008	.083	.091	8.8
M85485/12-20*1†	20	1	.0060	.008	.091	.099	11.2
M85485/12-18*1†	18	1	.0060	.008	.102	.110	14.9
M85485/12-16*1†	16	1	.0060	.008	.110	.119	18.0
M85485/12-14*1†	14	1	.0060	.008	.127	.136	24.1
M85485/12-12*1†	12	1	.0060	.008	.143	.153	33.2
M85485/12-10*1†	10	1	.0060	.008	.169	.179	48.1
M85485/12-24*2†	24	2	.0060	.008	.122	.131	13.0
M85485/12-22*2†	22	2	.0060	.008	.134	.145	16.0
M85485/12-20*2†	20	2	.0060	.008	.150	.161	20.5
M85485/12-18*2†	18	2	.0060	.008	.172	.183	27.8
M85485/12-16*2†	16	2	.0060	.008	.188	.201	34.0
M85485/12-14*2†	14	2	.0070	.009	.224	.237	46.7
M85485/12-24*3†	24	3	.0060	.008	.129	.139	17.0
M85485/12-22*3†	22	3	.0060	.008	.142	.154	20.9
M85485/12-20*3†	20	3	.0060	.008	.159	.171	27.6
M85485/12-18*3†	18	3	.0060	.008	.183	.195	38.0
M85485/12-16*3†	16	3	.0060	.008	.201	.214	47.0
M85485/12-14*3†	14	3	.0070	.009	.239	.253	65.1
M85485/12-24*4†	24	4	.0060	.008	.141	.165	21.3
M85485/12-22*4†	22	4	.0060	.008	.155	.184	26.6
M85485/12-20*4†	20	4	.0060	.008	.175	.206	35.4
M85485/12-18*4†	18	4	.0060	.008	.201	.236	49.0
M85485/12-16*4†	16	4	.0070	.009	.223	.263	61.4
M85485/12-14*4†	14	4	.0070	.009	.264	.309	84.4
M85485/12-24*5†	24	5	.0060	.008	.154	.178	25.4
M85485/12-22*5†	22	5	.0060	.008	.170	.199	31.8
M85485/12-20*5†	20	5	.0060	.008	.191	.223	42.6
M85485/12-18*5†	18	5	.0070	.009	.223	.258	60.1
M85485/12-16*5†	16	5	.0070	.009	.245	.285	74.6
M85485/12-14*5†	14	5	.0070	.009	.291	.336	103.

1/ PART NO.: The asterisks in the part number column shall be replaced by component wire and shield material designators in accordance with MIL-C-85485. The daggers in the part number column shall be replaced by color code designators in accordance with MIL-C-85485.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:56Z
Check the source to verify that this is the current version before use.

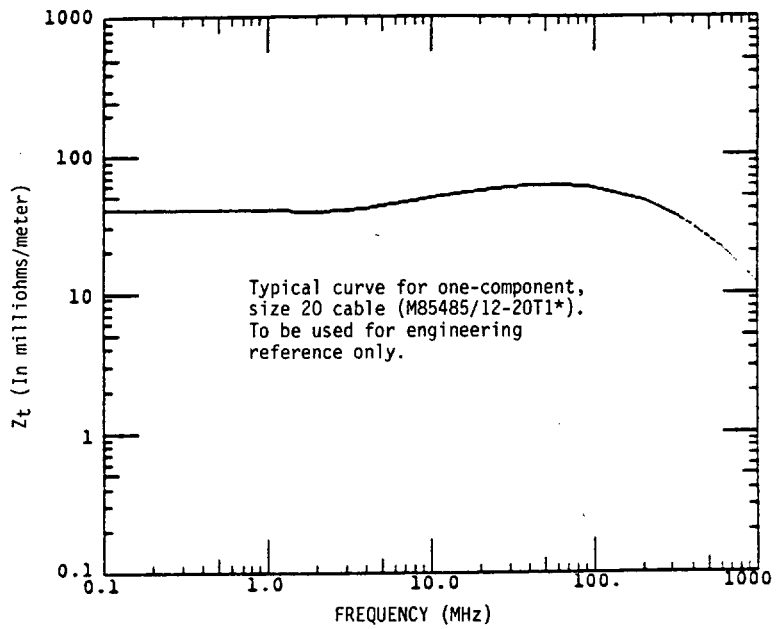


FIGURE 2. SURFACE TRANSFER IMPEDANCE, EFFECTIVE

ENGINEERING REFERENCE CURVE

Qualifying Activity: The activity responsible for this qualified products list is the Naval Air Systems Command, Washington, D.C. 20361.

Custodian:
AF - 85

Preparing activity:
Navy - AS
(Project No. 6145-1058-04)

Review activity:
AF - 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:56Z
Check the source to verify that this is the current version before use.