INCH-POUND

MIL-F-85475(AS)
AMENDMENT 3
23 June 1995
SUPERSEDING
AMENDMENT 2
3 September 1986

MILITARY SPECIFICATION

FUZE, GUIDED MISSILE, FMU-141/B

This amendment forms a part of MIL-F-85475(AS), dated 12 December 1983, and is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

* Paragraph 2.1.1: Delete "MIL-T-14757 Trichlorotrifluoroethane."

PAGE 3

* Paragraph 2.1.1: Add "MIL-STD-2000 Standard Requirements for Soldered Electrical and Electronic Assemblies."

Following paragraph 2.1.2, but before "CODE OF FEDERAL REGULATIONS (CFR)", add "OTHER GOVERNMENT DOCUMENTS".

Following ninth line of paragraph 2.1.2, add "PUBLICATIONS".

* Paragraph 2.1.2: Delete "WS-6536 Procedures and Requirements for Preparation and Soldering of Electrical Connections."

PAGE 4

Delete "PUBLICATIONS", "Naval Weapons Center (Code Ident 12934)", "Reg Memo 335-196-76" and title from Section 2.

PAGE 5

Change paragraph numbers "3.1.1, 3.1.1.1, 3.1.1.2, and 3.1.2" to "3.6, 3.6.1, 3.6.2, and 3.7", respectively.

Paragraph 3.2, first line, after "specified", add "in the contract or purchase order,".

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:54Z
Check the source to verify that this is the current version before use.

PAGE 6

* Paragraph 3.3.2.3, line 2: Delete "WS-6536" and substitute "MIL-STD-2000".

Paragraph 3.4.1, fourth line, delete "3.1.2" and substitute "3.7".

PAGE 7

Table II, change S5 test "Items checked (see Figure 2)" column from "R4, S1C" to "R4, R11, Q2, S1C"; and change S8 test "Items checked (see Figure 2)" column from "R1, 12, 13, 14, D2, S1C" to "R1, 12, 13, 14, 15, D2, Q5, S1C, S1D, Solenoid".

PAGE 8

Table III, third column "Test set switch positions" change "C+" subtitle to "C+ 5/" and add following footnote to bottom of page "5/ Test set C+ is at case ground."; change S1 and S2 tests "Items checked (see Figure 2)" from "S1A" and "S1B" to "S1A, R16, R17, and R18 to case" and "S1B, R16, R17, and R18 to case"; change test S4 Configuration C, Upper Limit (eighth column) from "1.30K" to "1.30M".

PAGE 9

Table IV, change A3 test "Items checked (see Figure 2) first line" from "R2, 4, 5, 11" to "C1, R2, 4, 5, 11".

Add new paragraph: "3.4.1.3 Operability (armed conditioned). The unit shall meet the requirements of Table V-1 when tested in accordance with 4.7.1.3.".

Add new Table V-1 as follows:

"Table V-1. Operability (armed condition) requirements for configuration A (see Table I).

Test	Mode	Outputs 1/		Inputs 1/	
		Pin 9	Pin 12	Pin 5	Pin 4
OP 1	Inhibit	No fire pulse (FP)	No FP	Ground	Not connected (NC)
OP 2	Delay	FP	No FP	NC	NC
OP 3	Instant-aneous	FP	FP	NC	Ground

1/ All inputs and outputs are with respect to pin 8."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:54Z
Check the source to verify that this is the current version before use.

PAGE 10

Table V, third column, change subtitle "C+" to "C+ 5/" and add footnote "5/ Test set C+ is at case ground."; A3 test "Items checked (see Figure 2)" column change from "S1C" to "S1C, R2, R4, R5, R11, D1, D4, Q2 (and R16, R17, and R18 to case)".

PAGE 11

Paragraph 3.4.4, third line, delete "28" and substitute "29".

PAGE 13

Paragraph 3.4.7.2, second line, add "and" after "(6.3.5)," and delete ", and the alternate mode (see 6.3.8),".

Change paragraph number 3.6 to 3.8.

PAGE 14

Paragraph 4.1.1.2, third line, delete "at least" and substitute "not less than".

Paragraph 4.1.1.3, third line, delete "3.1.1" and substitute "3.6".

PAGE 18

Paragraph 4.7, WARNING, first line, after "specified" add "herein,".

Paragraph 4.7.1, third line, delete "3.1.2" and substitute "3.7".

Paragraph 4.7.1.1, last line, delete "table" and substitute "tables."

Add new paragraph to bottom of page as follows:

"4.7.1.3 Operability (armed condition). To determine conformance with 3.4.1.3, perform the tests of Table V-1. For all tests, the unit shall be held in a drop fixture (see Drawing SA497753) with the case secured by a compression fixture. The unit shall be powered with 26 ±3 Vdc at pins 10(+) and 8(-). Pins 9 and 12 shall be terminated with 3.6 ±5 percent ohm resistors. Monitor pins 9 and 12 for a positive 20 ±10 volt FP for each test of Table V-1. Pins 4 and 5 shall either be connected to pin 8 (ground) or not connected as indicated for each test. For each test, the test fixture containing the test item shall be dropped to determine that the requirements of 3.4.1.3 have been met."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:54Z
Check the source to verify that this is the current version before use.

PAGE 19

Paragraph 4.7.2, second and third lines: Delete "the test set described in Reg Memo 335-196-76" and substitute "SA497752".

Paragraph 4.7.2, third line, delete "3.1.2" and substitute "3.7".

After paragraph 4.7.2, add new paragraph as follows:

"4.7.2.1 High and low temperatures. To determine operability at low temperature, condition the device to -40 ±5°F and stabilize at this temperature for 2 hours minimum. At this temperature, verify the mechanical operability of 4.7.2. At the conclusion of the operability test, condition the low temperature units to +140 ±5°F and stabilize at this temperature for 2 hours minimum. At this temperature, verify the mechanical operability of 4.7.2."

* Paragraph 4.7.3: Delete 2nd sentence and substitute the following:

"Isopropyl alcohol (TT-I-735, grade optional) may be used as alternative immersion fluid for gross leak testing."

Paragraph 4.7.4a: Delete the second sentence and substitute "Safing results in automatic discharge of the firing capacitor."

Add new subparagraph as follows: "c. If the fuze is to remain in the armed position, discharge the firing capacitor by shorting pins 5 and 8 together for 2 minutes minimum. Verify that the firing capacitor has been discharged by measuring the voltage across pins 5 and 8. If less than 1 Vdc, the fuze is safe to handle."

PAGE 20

Subparagraph e second line, delete "28" and substitute "29"; and third line add "±10 percent" after "μF".

Renumber subparagraphs c through j, to d through k to account for new paragraph c.

PAGE 21

Delete word "CAUTION" at top of page and substitute word "WARNING".

Paragraph 4.7.5.2.2: Delete and substitute:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:54Z
Check the source to verify that this is the current version before use.

PAGE 21 (continued)

"4.7.5.2.2 Pyro shock. To determine conformance to 3.4.5.2,2, test the fuze in accordance with the following. Subject the fuze to one transient excitation in the primary axis (see Figure 1) to satisfy the shock response spectrum shown in Figure 11, and one transient excitation in each of the two remaining orthogonal secondary axes consistent with the shock response spectrum shown in Figure 11. The duration of the applied shock transients shall be between 0.02 and 0.15 second. The analyses used to determine the shock response spectrum shall be performed at a sequence of natural frequencies at intervals of one sixth octave or smaller. The allowed tolerance shall be within +6 and -3 dB of the specified acceleration. Single peak or notch equal to or less than one twelfth octave shall not exceed +12 and -6 dB from the specified spectrum."

PAGE 22

Paragraph 4.7.5.3, second line: Delete "105, either method" and substitute "105.1, either method, except minimum temperature shall be -65°F."

Paragraph 4.7.5.4, first line, add "flight" after "boost".

PAGE 24

Subparagraph g, at end of first line, add "a minimum of" and subparagraph i at beginning of third line, add "±10 percent".

PAGE 25

Paragraph 4.7.7.2.1d, second line, after "containing", add "a minimum of".

PAGE 26

Paragraph 4.7.7.2.2b, second line, after "containing", add "a minimum of".

PAGE 27

Paragraph 4.7.7.2.3b, second line, after "containing", add "a minimum of".

PAGE 29

Paragraph 6.2.1b, delete subparagraph number "b" and substitute "c"; second line, delete "3.1.2" and substitute "3.6."

Paragraph 6.2.1c, delete subparagraph number "c" and substitute "d"; second line, delete "3.1.2" and substitute "3.7."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:54Z
Check the source to verify that this is the current version before use.

PAGE 29 (continued)

Paragraph 6.2.1d, delete subparagraph number "d" and substitute "b"; last line, add "(see 3.2)" at end of sentence.

PAGE 31

Paragraph 6.3.7, second and third line: Delete "after a specified time delay following impact." and substitute "when the target is sensed."

Paragraph 6.3.8 Delete entirely.

PAGE 38

* Figure 7, third box titled "MECHANICAL OPERABILITY": delete "4.7.2" and substitute: "4.7.1.3, 4.7.2."

PAGE 40

Figure 9, second horizontal line from bottom reading "6 PREPROD/1 INSPECT": Delete "1" and substitute "3". Figure 9, parallel to box labeled "R(S), S, O, R(A)," add the following:

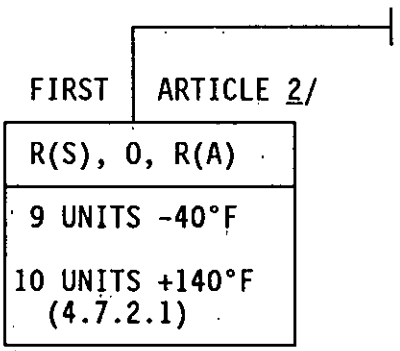


Figure 9 NOTES: Add: "2/ Only mechanical operability tests shall be run at temperature shown."

PAGE 42

Figure 11, above figure title: Add: "Note: Negative spectrum to be within 90 percent of positive spectrum for each shock test performed."

PAGE 43

Figure 12. Add at end of title "(5.8 grms)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:54Z
Check the source to verify that this is the current version before use.

PAGE 44

Figure 13. Add at end of title "(9.2 grms)."

PAGE 46

Delete "3.1.1.1" and substitute "3.6.1".

Delete "6.3.8 .... Alternate mode .... 31".

After "6.3.2", add "and armed position".

In "Title" column, sixth and seventh lines, add "flight" after "boost".

Delete "3.1.1" and substitute "3.6".

Delete "3.1.2" and substitute "3.7".

PAGE 47

Below line 6.3.4, insert titles: "3.4.1.3 Operability (armed condition) ..... 9" and ;
"4.7.1.3 Operability (armed condition) .....18"

PAGE 48

Delete "3.1.1.2" and substitute "3.6.2".

Delete "3.6" and substitute "3.8".

PAGE 49

Below line V, insert title: "V-1 Operability (armed condition) requirements for configuration A (see Table I) .....10"

Figure 12 title: Add at end of title "(5.8 grms)".

Figure 13 title: Add at end of title "(9.2 grms)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:54Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment are made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy - AS

(Project No. 1336-0003)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:54Z
Check the source to verify that this is the current version before use.