MILITARY SPECIFICATION

MICROCIRCUIT, SYNCHRONIZER, COMMAND OUTPUT (SCO), CLASS B, MONOLITHIC, CMOS, INTEGRATED CIRCUIT

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification contains requirements not normally covered by drawings and provided Quality Assurance Provisions for the fabrication of parts and assemblies of the Synchronizer, Command Output.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of Department of Defense Index of Specifications and Standards (DODSIS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-M-38510	- Microcircuits, General Specification For.
MIL-A-48078	- Ammunition, Standard Quality Assurance Provisions, General Specification for.
MIL-M-55565	- Microcircuits, Packaging of.

STANDARDS

MILITARY

MIL-STD-883	- Test Methods and Procedures for Microelectronics.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Armament, Munitions and Chemical Command, Attn: AMSMC-QA, Dover, New Jersey 07801-5001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1345
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:11Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents form a part of this specification to the extent herein.

DRAWINGS

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

1900107-200	- Synchronizer, Command Output - Schematic Diagram (Mines).
1900097-202	- Synchronizer, Command Output - Schematic Diagram (CI).
9333603	- Synchronizer, Command Ouput.

(Copies of specifications, standards, drawings and publications required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references dated herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Device classification. The microcircuit (device) shall conform to the product assurance level Class B, Monolithic, CMOS of MIL-M-38510 and as specified herein.

3.2 Device. The device shall comply with all requirements specified on Drawing 1900097-200 (mines) and 1900097-202 (CI) and with all requirements specified in applicable specifications and standards and as specified herein.

3.2.1 Design and manufacturing. Supplier's implementation of design, processing, manufacturing equipment and materials instructions in accordance with MIL-M-38510, Appendix A, as well as rebounding and rework criteria per applicable paragraphs of MIL-M-38510, are subject to review and approval by the procuring activity. Paragraphs of MIL-M-38510 concerning (a) line certification, (b) product assurance program plan, and (c) initial and periodic qualification, are not applicable.

3.2.2 Design and construction.

(1) Physical dimensions connection diagram, and pin assignments: See Figure 1 of Dwg. 9333603.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:11Z
Check the source to verify that this is the current version before use.

(2) Lead Finish: Finish C in accordance with MIL-M-38510.

3.3 Environmental and mechanical. Devices to be delivered under this specification shall be capable of meeting the following MIL-STD-883 environmental and mechanical tests when the devices are subjected to these tests in accordance with this specification.

Environmental Tests	Method	Conditions
Moisture resistance	1004	
Steady state life	1005	D, 100 hrs @ 125°C
Temperature cycling	1010	C, 10 cycles
High temperature storage	1008	C
Seal (Fine and Gross)	1014	(A or B & C) respectively
Burn-in	1015	D, 168 hrs @ 125°C

Mechanical Tests	Method	Conditions
Constant acceleration	2001	E, Y1 orientation only
Mechanical shock	2002	B
Solderability	2003	
Lead integrity	2004	B2
Resistance to solvents	2015	
Vibration, variable frequency	2007	A
External visual	2009	
Internal visual	2010	B
Bond strength	2011	D
Physical dimensions	2016	

3.4 Electrical performance requirements. The device shall have the following electrical characteristics.

3.4.1 Absolute maximum ratings. See Table I of Dwg. 9333603.

3.4.2 Operating conditions (Inputs). The components shall be operational in the conditions specified in Table II of Dwg. 9333603.

3.4.3 Electrical characteristics. The component shall meet the electrical performance characteristics specified in Table III of Dwg. 9333603.

3.5 Sequential performance. Sequential performance testing for the fast clock lockout and FSK Manchester to NRZ Decoder are described in Dwg. 9333603.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:11Z
Check the source to verify that this is the current version before use.

3.6 Required tests and suggested methods of examination. The test methods which follow are intended to convey the idea of what is to be tested and provide a simple method of doing it. It is recognized that automatic (computerized) tests will differ as to implementation of the test. Each test shall be run at minimum and maximum operating supply voltage as specified in Table I of Dwg. 9333603 unless otherwise specified.

3.6.1 Operating current. This test verifies the requirement of Table III of Dwg. 9333603 . Connect the device under test as shown in Figure 3 of Dwg. 9333603 and measure the current out of Pin 27 or into Pin 13. Verify that the current value is within the range specified in Table III of Dwg. 9333603.

3.6.2 LO frequency. This test verifies the requirements of Table III of Dwg. 9333603. Connect the device under test as shown in Figure 3 of Dwg. 9333603 and measure the frequency of the signal at Pin 17. Verify that the frequency is as specified in Table III of Dwg. 9333603.

3.6.3 DCL frequency. This test verifies the requirement of Table III of Dwg. 9333603. Connect the device under test as shown in Figure 3 of Dwg. 9333603. Switch PSD (Pin 26) to +5V and verify the frequency of DCL (Pin 4) is the max. value as specified in Table III of Dwg. 9333603. Switch PSD (Pin 26) to ground and verify the frequency of DCL (Pin 4) is the minimum value as specified in Table III of Dwg. 9333603.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:11Z
Check the source to verify that this is the current version before use.

3.7 Screening. All devices shall be 100% screened in full accordance with MIL-STD-883, Method 5004, class b. Final electrical tests per Table III of Dwg. 9333603. Burn-in per Figure 1 herein.

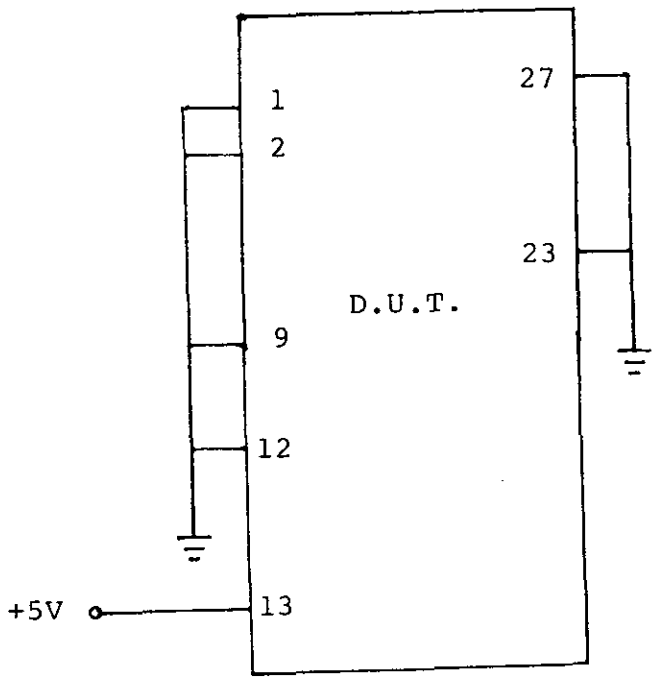


Figure 1. Burn-in circuit (or equipment)

3.7.1 Pre-Burn-in electrical tests. Pre-Burn-in electrical tests shall include all parameters specified in Table III of Dwg. 9333603 measured at T_A = 25°C.

3.7.2 Final electrical tests. Final electrical tests shall be done in accordance with D(2) of Dwg. 9333603.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:11Z
Check the source to verify that this is the current version before use.

3.8 Part marking. Only parts having met all requirements herein shall be marked with the following information in accordance with MIL-M-38510: (A) manufacturer's name or symbol, (B) manufacturer's date code (traceable to the wafer manufacturer's diffusion run), (C) the source control number "1920050CN9333603". Note: Once the part has been marked, the part is classifed confidential and shall be handled as such.

3.8.1 Other marks. The vendor may add additional markings, for his own use, on the bottom surface of the package provided that these markings do not interfere with the required markings.

3.8.2 Resistance to solvent. The marking shall remain legible when subjected to the resistance to solvents testing of MIL-STD-883, Method 2015.

3.9 Process control. All process controls essential for the manufacturing of microcircuits to assure a reliable end item shall be submitted to the designated agency specified in 6.3 herein prior to the start of fabrication.

3.10 Workmanship. (See MIL-M-38510).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-M-38510 shall apply and are hereby made part of this detail specification. The supplier is responsible for the performance of all inspection requirements as specified herein, and the supplier may use his own or any other facilities suitable for the performance of the tests and inspection requirements specified herein, unless disapproved by the Government. In addition, the Government reserves the right to witness or to perform any of these tests and inpections set forth in this specification where such test and inspections are deemed necessary to assure that supplies and services conform to prescribed requirements. The Government reserves the right to audit the data resulting from the manufacturer's performance of these tests and inspections.

4.2 Classification of inspections. The following types of inspection shall be conducted on this item.

a. First Article Inspection

b. Quality Conformance Inspection

c. Screening

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:11Z
Check the source to verify that this is the current version before use.

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.3.2 The first article inspection lot size after screening shall consist of fifty (50) devices, minimum.

4.3.2 Inspection to be performed. First article inspection shall be in accordance with the applicable requirements of MIL-M-38510 and as modified by this specification, excepth that the procuring agency shall be the qualifying activity. First article requirements shall consist of inspections specified in subgroups "a" through "f" listed in Table IV herein. First article items may be subjected by the qualifying activity (Government) to all of the examinations and tests specificed in this specification and to any requirements of the applicable drawings.

4.3.3 Rejection. If any device fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Goverment reserves the right to terminate its inspection upon any failure of a device in the sample to comply with any of the stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:11Z
Check the source to verify that this is the current version before use.

TABLE IV. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-M-64034(AR)

PARAGRAPH	TITLE: Microcircuit, Synchronizer, Command Output		SHEET 1 OF 2		DRAWING NUMBER: 9333603
					NEXT HIGHER ASSEMBLY: ---
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Sample size	50	1/		
	Subgroup a	25			
	Electrical parameters @ -37°C ± 5°C			3.4	Table III
	Electrical parameters @ +57°C ± 5°C			3.4	Table III
	Physical dimensions			3.3	MIL-STD-883, Method 2016
	Subgroup b	25			
	Mechanical shock			3.3	MIL-STD-883, Method 2002, B
	Vibration, variable frequency			3.3	MIL-STD-883, Method 2007, A
	Moisture resistance			3.3	MIL-STD-883, Method 1004
	Seal (fine leak)			3.3	MIL-STD-883, Method 1014, A or B
	Seal (gross leak)			3.3	MIL-STD-883, Method 1014, C
	External visual			3.3,3.8 3.10	MIL-STD-883, Method 2009
	Electrical parameters @ 25°C ± 5°C			3.5.1	Table III
	Subgroup c				
	Resistance to solvents	3		3.3	MIL-STD-883, Method 2015
	Bond strength (bond pulls 2/)	(25)		3.3	MIL-STD-883, Method 2011, D

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-OA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:11Z
Check the source to verify that this is the current version before use.

TABLE IV. First Article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-M-64034(AR)

PARAGRAPH	TITLE: Microcircuit, Synchronizer, Command Output	SHEET 2 OF 2	DRAWING NUMBER: 9333603
			NEXT HIGHER ASSEMBLY: ---

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Subgroup d Solderability (leads inspected 3/)	(25)		3.3	MIL-STD-883, Method 2003
	Subgroup e Lead integrity	2		3.3	MIL-STD-883, Method 2004, B
	Seal (fine leak)			3.3	MIL-STD-883, Method 1014, A or B
	Seal (gross leak)			3.3	MIL-STD-883, Method 1014, C
	Subgroup f Steady state life	25		3.3	MIL-STD-883, Method 1005
	Electrical parameters @ 25°C ± 5°C			3.5.1	Table III

NOTES:
1/ Devices which fail any test criteria in the screening sequence shall be removed from the First Article sample and replaced by additional units.
2/ The sample size is the number of bond pulls selected from a minimum number of 10 devices.
3/ The sample size is the number of leads inspected. In no case shall less than 3 devices be used to provide the number of required leads.
4/ All electrical parameters shall be recorded as go/no-go data.
5/ The same sample units shall be subjected to all the tests in a subgroup.

NOTES:
6/ Devices used in subgroup a shall be used in subgroup b. Devices used in subgroups a and b shall be used in subgroups c, d, and e. (Sample 50 units: subgroup a - 25 units; subgroup f - 25 units).
7/ Tests within each subgroup shall be performed in the sequence shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:11Z
Check the source to verify that this is the current version before use.

4.3.4 Requalification. The device shall be subjected to another First Article as stipulated in the contract if:

a. The contractor's manufacturing techniques or process affect the form, fit, function or internal geometry of the device by either the contractor or one of his sub-contractors supplying parts assemblies.

b. The contractor relocated his assembly facilities.

c. The contractor uses a new sub-contractor for material, parts, or assembly.

d. A change occurs in devices material, performance, or assembly.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots formation shall be as defined in MIL-M-38510 for Class B devices.

4.4.2 Examination.

a. Quality conformance inspection requirements shall be in accordance with Tables I, II, III of Dwg. 9333603 and specified herein.

b. Inspection requirements. Inspection requirements for this device shall be in accordance with the requirements of MIL-M-38510 and MIL-STD-883B, Method 5004.4 (Class B).

c. Conformance testing. Groups A, B, C, and D test procedures shall be in accordance with MIL-STD-883, Method 5005, Class B. Group A electrical tests per Table III of Dwg. 9333603. Groups C and D end point parameters per Table III of Dwg. 9333603. Sampling plan shall be in accordance with applicable paragraphs of MIL-M-38510, Appendix B.

d. General inspection conditions. Disposition of failed lots and lot resubmission procedures shall be in accordance with applicable paragraphs of MIL-M-38510.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:11Z
Check the source to verify that this is the current version before use.

4.5 Test methods, circuits and procedures.

4.5.1 Alternate methods, circuits and procedures. Unless otherwise stated in the specific test method, the methods and circuits shown are given as the basic measurement method. For alternate methods, circuits and procedures the manufacturer shall demonstrate to the procuring activity that alternates which he may desire and propose to use are equivalent and give results within the desired accuracy of measurement (See 6.3).

4.5.2 Test conditions. Unless otherwise specified all examinations and tests shall be made under the following conditions:

Temperature - 25° ± 3°C
Humidity - 10 to 70 percent RH
Pressure - 29 ± 3 inches of Hg

5. PACKING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

5.1.2 Packing and delivery. Requirement for packing shall be in accordance with MIL-M-38510, including provisions for electrostatic protection and MIL-M-55565. Shipping of classified materials shall conform to the requirements established by the Department of Defense for confidential materials using the signature security service.

6. NOTES

6.1 Intended use. This microcircuit is part of the MOPMS Mine Electronics Assembly.

6.2 Ordering data. Procurement documents shall specifiy the following:

a. Title, number and date of this specification.
b. Provisions for submission of first article samples.
c. Provisions of MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. (See MIL-A-48078) Submit equipment designs as required to Commander, US Army Armament Research, Development and Engineering Center, AMSMC-QAT-I (D), Dover, New Jersey 07801-5001.

6.4 Distribution of ammunition data cards. Distribution of data cards shall include the following: Commander, US Army Armament Research, Development and Engineering Center, AMSMC-QAT-M (D), Dover, New Jersey 07801-5001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:11Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.

Conformance Testing
Environmental Testing
Mechanical Testing
Microcircuit, Synchronizer, Command Output
Screening

6.6 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, Picatinny Arsenal or ARRADCOM drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1345-A246)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
U S ARMY ARMAMENT MUNITIONS & CHEMICAL COMMAND
ATTN: AMSMC-QA
DOVER , NJ 07801 5001

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-64034	MICROCIRCUIT, SYNCHRONIZER, COMMAND OUTPUT (SCO), CLASS B MONOLITHIC, CMOS, INTERGRATED CIRCUIT

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil - Downloaded: 2025-10-23T03:11Z
Check the source to verify that this is the current version before use.