MILITARY SPECIFICATION

PROBE, CRUSH SENSOR, RH, FZU-45/B

AND LH, FZU-46/B AND

PROBE, AIR PRESSURE, FZU-47/B

This amendment forms a part of Military Specification MIL-P-85459(AS) dated 12 Decenber 1983, and is approved for use within the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 3

Following paragraph 2.1.2, but before "CODE OF FEDERAL REGULATIONS (CFR)", add "OTHER GOVERNMENT DOCUMENTS".

Following eighth line of paragraph 2.1.2, add "PUBLICATIONS".

PAGE 4

Change paragraph number "3.1.1" to "3.7", and "3.1.2" to "3.8".

PAGE 5

Change paragraph number "3.1.3" to "3.8.1".

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Page replaced
35	35
36	Reprinted without change

FSC 1336

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20260-23T10:53Z
Check the source to verify that this is the current version before use.

PAGE 6

Paragraph 3.4.2, third line, delete "end item." and substitute "probe.".

Table I title, delete "type" and substitute "Type".

Table I, fourth and fifth lines, fourth column, delete "100 Mohms" and substitute "50/5 Mohms 5/"; and after footnote 4/ under table, add "5/ 50 Mohms applies prior to the environmental inspection sequence; 5 Mohms applies during the environmental inspection sequence."

PAGE 7

Table II title, delete "type" and substitute "Type".

Table II, fourth and fifth lines, fourth column, delete "100 Mohms" and substitute "50/5 Mohms 5/"; and after footnote 4/ under table, add "5/ 50 Mohms applies prior to the environmental inspection sequence; 5 Mohms applies during the environmental inspection sequence."

PAGE 8

Table III title, delete "type" and substitute "Type".

Table III, fourth and fifth lines, fourth column, delete "100 Mohms" and substitute "50/5 Mohms 4/"; and after footnote 3/ under table, add "4/ 50 Mohms applies prior to the environmental inspection sequence; 5 Mohms applies during the environmental inspection sequence."

PAGE 9

Table IV title, delete "type" and substitute "Type".

Table IV, fourth and fifth lines, fourth column, delete "100 Mohms" and substitute "50/5 Mohms 4/"; and after footnote 3/ under table, add "4/ 50 Mohms applies prior to the environmental inspection sequence; 5 Mohms applies during the environmental inspection sequence."

PAGE 10

Table V title, delete "type" and substitute "Type".

Table V, Add Test 23 with the following switch settings and the following footnote 2:

"23	X	X	0	0	0	0	0	>6 volts 2/

2/ Test voltage to be read 5 seconds after removal of power."

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:53Z
Check the source to verify that this is the current version before use.

PAGE 11

Table VI title, second line, delete "type" and substitute "Type".

Table VI, Add new Test 6 and Test 8; change existing Test 6 to Test 7; add footnote 2:

"	6	0	0	0	---	4 V min 2/
	7	TP3 to TP4			1.0 ohm max	
	8	TP4 to TP5			1.0 ohm max	

2/ Test voltage to be read 5 seconds after removal of power."

PAGE 12

Change paragraph number "3.7" to "3.9".

Paragraph 4.1.1, second line after test, add "equipment".

Paragraph 4.1.1.2, third line, delete "at least" and substitute "not less than".

Paragraph 4.1.1.3, third line, delete "3.1.1" and substitute "3.7".

PAGE 15

Paragraph 4.7 NOTE, third line, delete "4.3.2" and substitute "4.3.4".

PAGE 16

Paragraph 4.7.2.1a, second line, after "a" add "minimum".

Paragraph 4.7.2.1b, first line, after "(A)" add "minimum"; second line, after "28" add "±1".

Paragraph 4.7.2.2b, second line, after "a" add "minimum".

Paragraph 4.7.2.2c, first line, delete "at 28 Vdc." and substitute "minimum at 28 ±1 Vdc.".

PAGE 17

Paragraph 4.7.3, second line, delete "3.1.1" and substitute "3.7".

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:53Z
Check the source to verify that this is the current version before use.

PAGE 19

Paragraph 4.7.6.1, second line, following 105.1, add: "either method, except minimum temperature shall be -65°F."

PAGE 20

Paragraph 4.7.6.3.2: Delete paragraph and substitute the following:

"4.7.6.3.2 Pyro shock. To determine conformance to 3.4.4.3.2, test the probe in accordance with the following. Subject the probe to one transient excitation in the primary axis (see Figures 1 and 2) to satisfy the shock response spectrum shown in Figure 16, and one transient excitation in each of the two remaining orthogonal secondary axes consistent with the shock response spectrum shown in Figure 16. The duration of the applied shock transients shall be between 0.02 and 0.15 second. The analyses used to determine the shock response spectrum shall be performed at a sequence of natural frequencies at intervals of one sixth octave or smaller. The allowed tolerance shall be within +6 and -3 dB of the specified acceleration. Single peak or notch equal to or less than one twelfth octave shall not exceed +12 and -6 dB from the specified spectrum."

Paragraph 4.7.6.4, fifth line, after "hours" add "minimum".

PAGE 21

Paragraph 4.7.6.5a. Add to the end of the second line after module: "(inhibit mode):"

Paragraph 4.7.6.5b. Add to the end of the second line after module: "(noninhibit/delay mode):"

Paragraph 4.7.7, second line, delete "3.6 and 3.7." and substitute "3.5, 3.6 and 3.9.".

PAGE 22

Paragraph 6.2.1b, delete subparagraph number "b" and substitute "c"; second line, delete "3.1.1." and substitute "3.7.".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:53Z
Check the source to verify that this is the current version before use.

PAGE 23

Paragraph 6.2.1c, delete subparagraph number "c" and substitute "d"; second line, delete "3.1.2" and substitute "3.8.".

Paragraph 6.2.1d, delete subparagraph number "d" and substitute "e"; second line, delete "3.1.3" and substitute "3.8.1.".

Paragraph 6.2.1e, delete subparagraph number "e" and substitute "b"; last line after "article", add "(see 3.2).".

PAGE 24

Paragraph 6.3.1.1, second line, after "installed" add "(see 3.4.2.1).".

Paragraph 6.3.1.2, third line, after "switch" add "(see 3.4.2.2.1).".

Paragraph 6.3.2, third line, after "switch" add "(see 3.4.2.2.2).".

Paragraph 6.3.3, last line, after "personnel" add "(see 3.4.2.1 and 3.4.2.2).".

Paragraph 6.3.4, last line, after "time" add "(see 3.4.3).".

PAGE 25

Figure 1, title line, delete "type" and substitute "Type".

PAGE 26

Figure 2, title line, delete "type" and substitute "Type".

PAGE 27

Figure 3, title line, delete "type" and substitute "Type".

Figure 4, title line, delete "type" and substitute "Type".

PAGE 28

Figure 5, title line, delete "type" and substitute "Type".

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:53Z
Check the source to verify that this is the current version before use.

PAGE 29

Figure 6 Delete "TYPE I PROBES" and substitute "TYPES Ia and Ib PROBES".

PAGE 30

Figure 7 Delete "TYPE I PROBES" and substitute "TYPE Ia and Ib PROBES".

PAGE 31

Figure 8, in third box from bottom of the flow chart, delete "1" and substitute "2"; and delete ",0"; in last box of flow chart, delete "1" and substitute "2"; and delete ",0". Figure 8, parallel and to the left of the last box of the flow chart, add the following box:

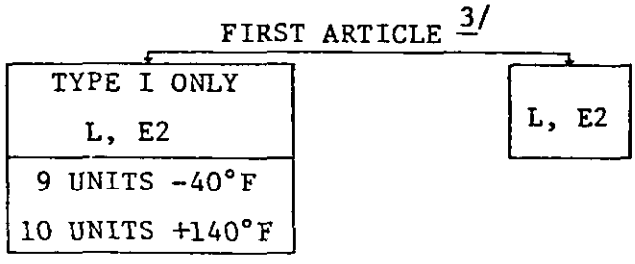


Figure 8 Notes, add " 3/ Only operational tests shall be run at temperature shown."

Figure 8 Legend, after "V", add "E - Electrical Inspections
Type I Probes - 4.7.3.1
Type II Probes - 4.7.3.2.1"

Figure 8 Legend, add "1" after first "E"; after "Type II Probes - 4.7.3.2.1" add "(S3 through S10 only)"; and delete "1" after "E1" and add "2".

Figure 8, in third and fifth box from top, add "1" after "E".

PAGE 35

Substitute new Figure 13

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:53Z
Check the source to verify that this is the current version before use.

PAGE 36

Figure 14, title line, delete "type" and substitute "Type".

PAGE 37

Figure 15, title line, delete "type" and substitute "Type".

PAGE 38

Figure 16, Add NOTE above figure title:

"NOTE: Negative spectrum to be within 90 percent of positive spectrum for each shock test performed."

PAGE 39

Figure 17, Add "(5.8 grms)" to the end of the figure title.

PAGE 40

Figure 18, Add "(9.2 grms)" to the end of the figure title.

PAGE 41

Delete paragraph number "3.1.3" and substitute "3.8.1".

Delete paragraph number "3.1.1" and substitute "3.7".

Delete paragraph number "3.1.2" and substitute "3.8".

PAGE 43

Delete paragraph number "3.7" and substitute "3.9".

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:53Z
Check the source to verify that this is the current version before use.

PAGE 44

Under "TABLES", delete "type" and substitute "Type" (6 places).

Under "FIGURES", delete "type" and substitute "Type" (7 places).

List of figures, Add "(5.8 grms)" to the end of the Figure 17 title and add (9.2 grms)" to the end of the Figure 18 title.

The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing Activity:
NAVY - AS
(Project 1336-N553)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:53Z
Check the source to verify that this is the current version before use.