
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments on the Air Force-Navy standardization program. This drawing supersedes all superseded standard drawings for the same product and shall become effective for the procurement of new/initial supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

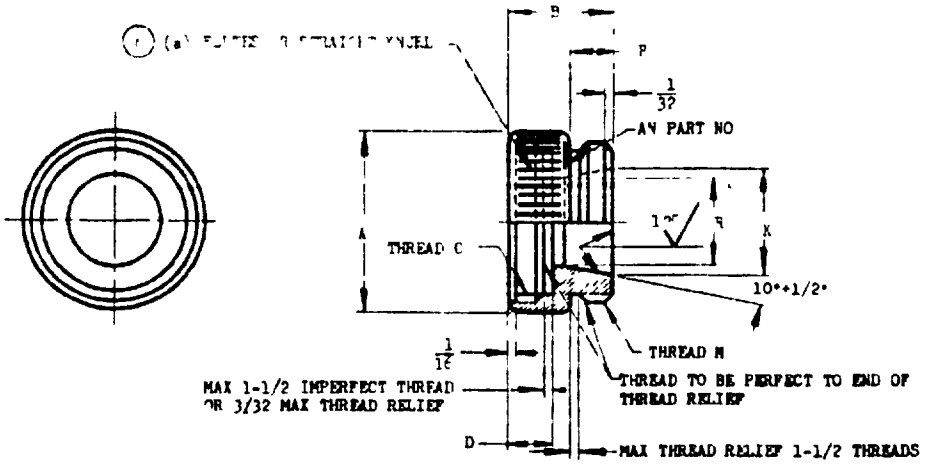

AN PART NO.	A +3/32 -1/32 DIA	B ±1/32	THREAD C	D +0 -2/32	K ±.005 DIA	THREAD M	P		R ±.005 DIA
AN3055-10-3	19/32	7/8	1/2-28UNEF-2B	3/8	.332	1/2-28UNEF-2A	3/8		.178
AN3055-10-4	5/8	7/8	1/2-28UNEF-2B	3/8	.394	5/8-24NEF-2A	3/8		.240
AN3055-12-3	23/32	7/8	5/8-24NEF-2B	3/8	.332	1/2-28UNEF-2A	3/8		.178
AN3055-12-4	23/32	7/8	5/8-24NEF-2B	3/8	.394	5/8-24NEF-2A	3/8		.240
AN3055-14-4	27/32	7/8	3/4-20UNEF-2B	3/8	394	5/8-24NEF-2A	3/8		.240
AN3055-14-6	27/32	7/8	3/4-20UNEF-2B	3/8	519	3/4-20UNEF-2A	3/8		.365
AN3055-16-4	1	7/8	7/8-20UNEF-2B	3/8	.394	5/8-24NEF-2A	3/8		.240
AN3055-16-6	1	7/8	7/8-20UNEF-2B	3/8	519	3/4-20UNEF-2A	3/8		.365
AN3055-16-8	1	7/8	7/8-20UNEF-2B	3/8	669	7/8-20UNEF-2A	3/8	+1/16 -0	.515
AN3055-18-6	1- 1/8	7/8	1-20UNEF-2B	3/8	.519	3/4-20UNEF-2A	3/8		365
AN3055-18-8	1- 1/8	7/8	1-20UNEF-2B	3/8	669	7/8-20UNEF-2A	3/8		.515
AN3055-18-10	1- 1/8	7/8	1-20UNEF-2B	3/8	.794	1-20UNEF-2A	3/8		.640
AN3055-22-8	1- 5/16	7/8	1-3/16-18NEF-2B	3/8	669	7/8-20UNEF-2A	3/8		.515
AN3055-22-10	1- 5/16	7/8	1-3/16-18NEF-2B	3/8	.794	1-20UNEF-2A	3/8		.640
AN3055-22-12	1- 5/16	7/8	1-3/16-18NEF-2B	3/8	.929	1-3/16-18NEF-2A	3/8		.775
AN3055-28-10	1- 9/16	7/8	1-7/16-18NEF-2B	3/8	.794	1-20UNEF-2A	3/8		.640
AN3055-28-12	1- 9/16	7/8	1-7/16-18NEF-2B	3/8	.929	1-3/16-18NEF-2A	3/8		.775
AN3055-28-16	1- 9/16	7/8	1-7/16-18NEF-2B	3/8	1.214	1-7/16-18NEF-2A	3/8		1 060
AN3055-32-12	1- 7/8	15/16	1-3/4-18NS-2B	7/16	.929	1-3/16-18NEF-2A	3/8		.775
AN3055-32-16	1- 7/8	15/16	1-3/4-18NS-2B	7/16	1.214	1-7/16-18NEF-2A	3/8		1 060
AN3055-32-20	1- 7/8	15/16	1-3/4-18NS-2B	7/16	1.469	1-3/4-18NS-2	7/16	±1/64	1 315
AN3055-36-16	2- 1/8	1- 1/16	2-18NS-2B	1/2	1.214	1-7/16-18NEF-2A	3/8	+1/8 -0	1.06
AN3055-36-20	2- 1/8	1- 1/16	2-18NS-2B	1/2	1.469	1-3/4-18NS-2	7/16	+1/16,-0	1 315
AN3055-36-24	2- 1/8	1- 1/16	2-18NS-2B	1/2	1 724	2-18NS-2	1/2	±1/64	1 57
AN3055-40-20	2- 3/8	1- 1/16	2-1/4-16UN-2B	1/2	1 469	1-3/4-18NS-2	7/16	+1/16,-0	1 315
AN3055-40-24	2- 3/8	1- 1/16	2-1/4-16UN-2B	1/2	1.724	2-18NS-2	1/2		1 570
AN3055-40-28	2- 3/8	1- 1/16	2-1/4-16UN-2B	1/2	1.976	2-1/4-16UN-2A	1/2	±1/64	1 822
AN3055-44-24	2- 5/8	1- 3/16	2-1/2-16UN-2B	9/16	1.724	2-18NS-2	1/2	+1/16 -0	1 570
AN3055-44-28	2- 5/8	1- 3/16	2-1/2-16UN-2B	9/16	1 976	2 1/4-16UN-2A	1/2		1.82
AN3055-44-32	2- 5/8	1- 3/16	2-1/2-16UN-2B	9/16	2.229	2-1/2-16UN-2A	9/16	±1/64	2 075
AN3055-48-28	3- 1/8	1- 5/16	3-16UN-2B	5/8	1.976	2-1/4-16UN-2A	1/2	+1/8 ,-0	1.822
AN3055-48-32	3- 1/8	1- 5/16	3-16UN-2B	5/8	2.229	2-1/2-16UN-2A	9/16	+1/16,-0	2.075
AN3055-48-40	3- 1/8	1- 5/16	3-16UN-2B	5/8	2 744	3-16UN-2A	5/8	±1/64	2.580

THREADS SHALL BE IN ACCORDANCE WITH SPECIFICATION MIL-S-7742, EXCEPT 1-3/4-18 NS-2B AND 2-18 NS-2B WHICH SHALL BE IN ACCORDANCE WITH AMERICAN STANDARD ASA B-1.

MATERIAL: ALUMINUM ALLOY SPECIFICATION QQ-A-351, CONDITION T, DIECASTINGS, SPECIFICATION QQ-A-355; SAND-CASTINGS, SPECIFICATION QQ-A-601, OR MATERIAL SPECIFIED BY THE PROCURING ACTIVITY

FINISH: SPECIFICATION MIL-C-5015

(6) (a) OPTIONAL MARKING ROLL AN PART NUMBER IN THE CENTER OF KNURLED PORTION

EXAMPLE OF PART NUMBER: AN3055-40-20 = ADAPTER FROM SIZE 40 RECEPTACLE TO SIZE 20, 1-1/4 INCH, SOLID CONDUIT FITTING.

REMOVE ALL BURRS AND SHARP EDGES

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE FRACTIONS ±1/64.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3055
NONE	BOX CONNECTOR, ELECTRICAL	

APPROVED 22 Jun 42 REVISED (1) 22 Jun 43 (2) 7 Dec 45 (3) 6 Jan 50 (4) 16 Apr 53 (5) 19 Jan 56 (6) 21 Sep 56

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:18Z
Check the source to verify that this is the current version before use.