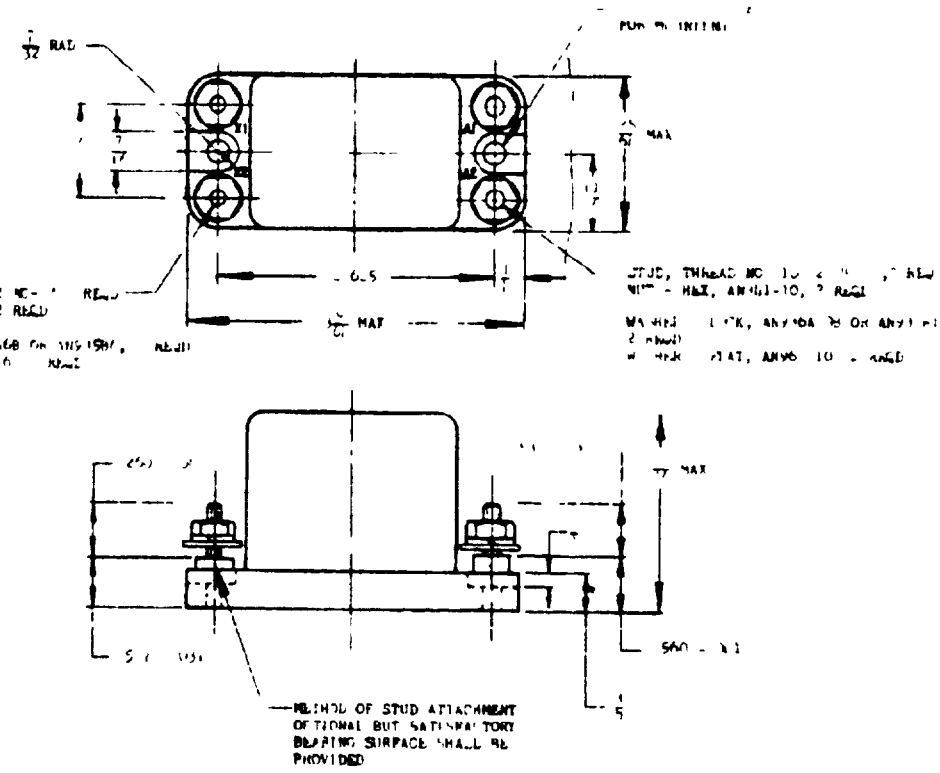



②
AN PART NO
AN3320-1

DETAIL REQUIREMENTS

(A)	MAXIMUM OPERATING VOLTAGE	29 VOLTS
(B)	PICKUP VOLTAGE	18 VOLTS
(C)	DROPOUT VOLTAGE	1 VOLTS +0, -5
(D)	RATED LOAD	
	RESISTIVE - 28V DC	25 AMP
	INDUCTIVE - 28V DC	25 AMP
	MOTOR - 28V DC	2[illegible] AMP
(E)	COIL CURRENT	[illegible] AMP
(F)	MINIMUM OPERATING PERIOD	3 HOURS
(G)	MINIMUM OPERATING CYCLES	20,000
(H)	MAXIMUM WEIGHT	[illegible] POUND
(I)	RATED DUTY	CONTINUOUS
(J)	NOMINAL COIL VOLTAGE	28 VOLTS

TERMINAL [illegible] SHALL BE COUNTERSUNK AND FILLED WITH [illegible] COMPOUND OR EQUIVALENT

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCE FRACTIONAL [illegible], TWO PLACE [illegible]

OVERLOAD, INRUSH, AND CONTACT CHOP OFF QUALIFICATION MIL-R-6106 ARE NOT APPLICABLE

INACTIVE FOR DESIGN AFTER 15 JUNE 1955

NO SUPERSEDING STANDARD

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES SEE ANA BULLETIN NO. 337

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3320
MIL-R-6106	RELAY, 25 AMP IPST, UNSEALED, CLASS O'	

APPROVED [illegible] REVISED ⓒ [illegible] 9 Oct 52

GPO 811100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.