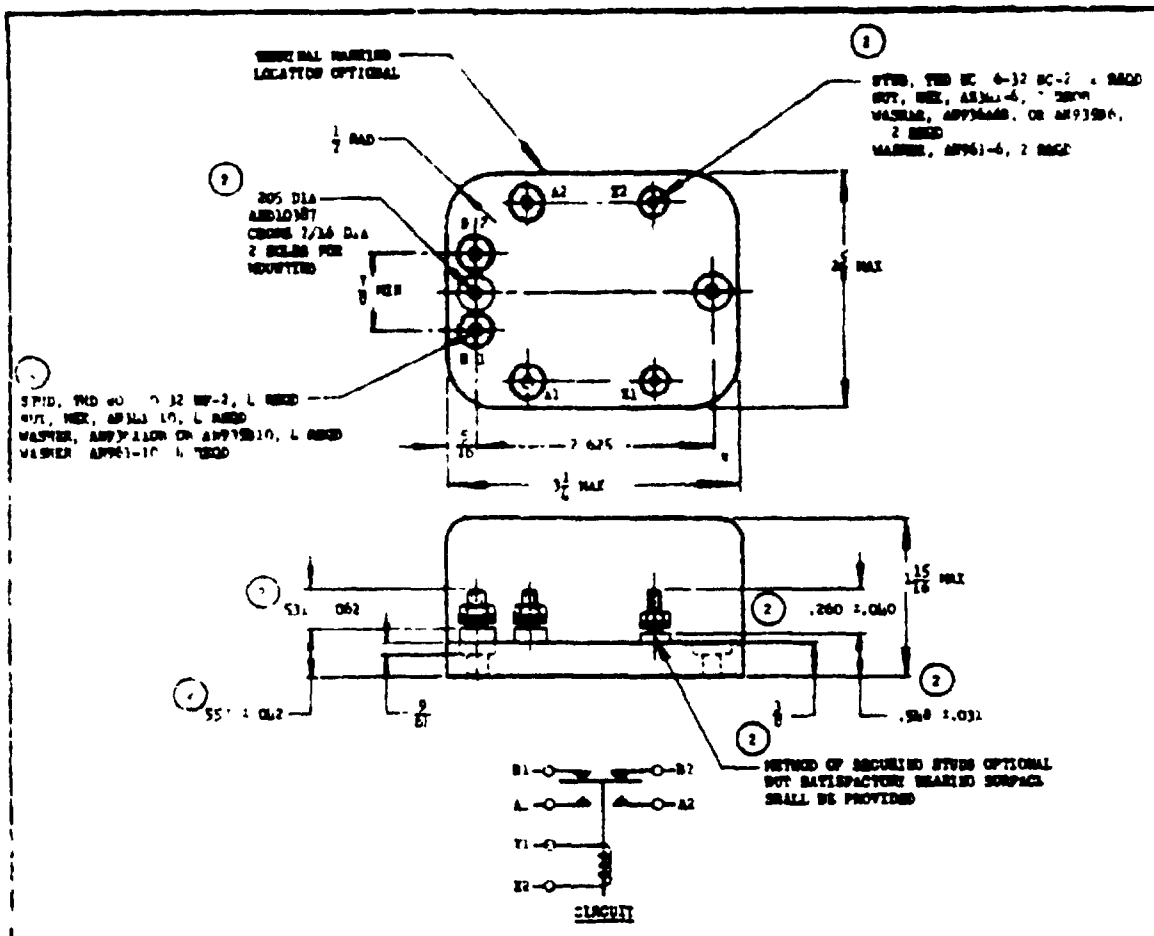

DETAIL REQUIREMENTS:

(A)	MAXIMUM OPERATING VOLTAGE	29 VOLTS
(B)	PICKUP VOLTAGE	18 VOLTS
(C)	DROPOUT VOLTAGE	7 VOLTS +0, -5
(D)	RATED LOAD	

AN PART NO
AN3324-1

	NORMALLY OPEN	NORMALLY CLOSED
RESISTIVE	25 AMPS	20 AMPS
INDUCTIVE	20 AMPS	
MOTOR		10 AMPS

(E)	COIL CURRENT	0.25 AMP
(F)	MINIMUM OPERATING PERIOD	3 HOURS
(G)	MINIMUM OPERATING CYCLES	25,000
(K)	MAXIMUM WEIGHT	0.7 POUND
(T)	RATED DUTY	CONTINUOUS
(2)	NOMINAL COIL VOLTAGE	28 VOLTS

CONTOUR SHOWN BY PHANTOM LINES IS OPTIONAL WITH THE MANUFACTURER PROVIDED MAXIMUM DIMENSIONS SPECIFIED ARE NOT EXCEEDED.

TERMINAL POST HOLES SHALL BE COUNTERBORED AND PROPERLY FILLED WITH SOCKET COMPOUND, OR EQUIVALENT

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ± .005

(2) OVERLOAD, RUPTURE, AND CONTACT DROP OF SPECIFICATION MIL-R-6106 ARE NOT APPLICABLE

INACTIVE FOR DESIGN AFTER 22 JUNE 1955

NO SUPERSEDING STANDARD

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES SEE ARA BULLETIN NO. 267

APPROVED 6 Apr 55 REVISED (2) Sep 55 (2) Jun 55

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3324
MIL-R-6106	(2) RELAY, 25 AMP 1PDT, UNSEALED, CLASS D	

SUPERSEDING USAF SPEC NO 1 ea

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.