INCH-POUND

AN3324
REVISION 4
10 August 2010
SUPERSEDING
REVISION 3
15 January 2002

DETAIL SPECIFICATION SHEET

RELAY, 25 AMP, 1PDT, UNSEALED, CLASS O

Inactive for new design after 22 June 1955.
No superseding document.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-PRF-6106.

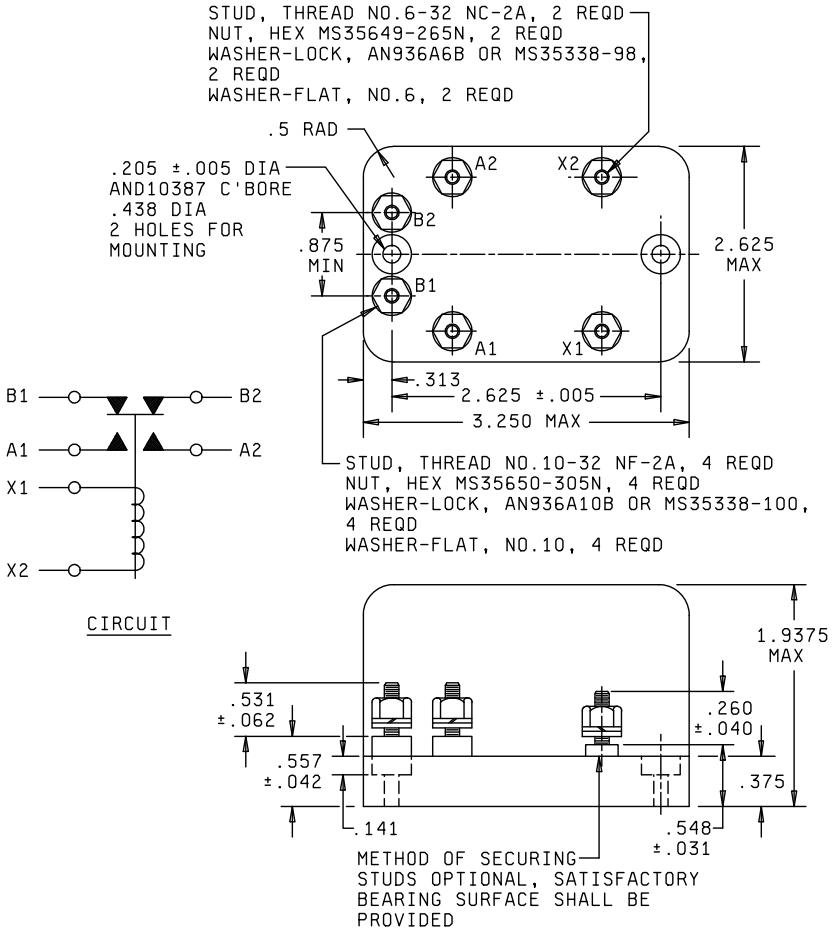


FIGURE 1. Configurations and dimensions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm |
|---|---|---|---|
| .005 | 0.013 | .313 | 0.795 |
| .010 | 0.025 | .375 | 0.953 |
| .016 | 0.040 | .438 | 1.113 |
| .031 | 0.079 | .531 | 1.349 |
| .040 | 0.102 | .548 | 1.392 |
| .042 | 0.107 | .557 | 1.415 |
| .062 | 0.157 | .875 | 2.223 |
| .141 | 0.358 | 1.938 | 4.923 |
| .205 | 0.521 | 2.625 | 6.668 |
| .260 | 0.660 | 3.250 | 8.255 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance are ±.016 (0.040 mm).
4. Contour shown by phantom lines is optional with the manufacturer provided the maximum dimensions specified are not exceeded.
5. Terminal post holes shall be counterbored and properly filled with socket compound, or equivalent.

FIGURE 1. Configurations and dimensions - Continued.

REQUIREMENTS

Operating cycles: 25,000 minimum.

Contact data:

Contact voltage drop: Not applicable.

Load ratings: See Table I.

TABLE I - Rated contact load (per pole).

| Type of load | Normally Open Amperes | Normally Closed Amperes |
|---|---|---|
| Resistive (DC) | 25 | 20 |
| Inductive | 20 | 20 |
| Motor | 20 | 10 |

Overload current: Not applicable.

Rupture current: Not applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.

Coil data:

Nominal coil voltage: 28 volts.

Maximum operating voltage: 29 volts.

Pickup voltage: 18 volts.

Dropout voltage: 2 volts, minimum; 7 volts, maximum.

Rated duty: Continuous.

Coil current: 0.25 amperes, maximum.

Physical data:

Weight: 0.7 pounds, maximum.

Qualification by similarity: See MIL-PRF-6106.

Retention of qualification: To retain qualification, the manufacturer shall submit group A acceptance reports on a yearly basis to the qualifying activity.

Quality conformance inspection: Performance of groups B and C tests are not applicable.

Part or Identifying Number (PIN): AN3324-1.

Supersession information: Supersedes USAF Drawing 32491.

Custodian:
Army - AV
Air Force - 85
DLA - CC

Review activity:
Air Force - 99

Preparing activity:
DLA - CC

(Project 5945-2010-027)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.