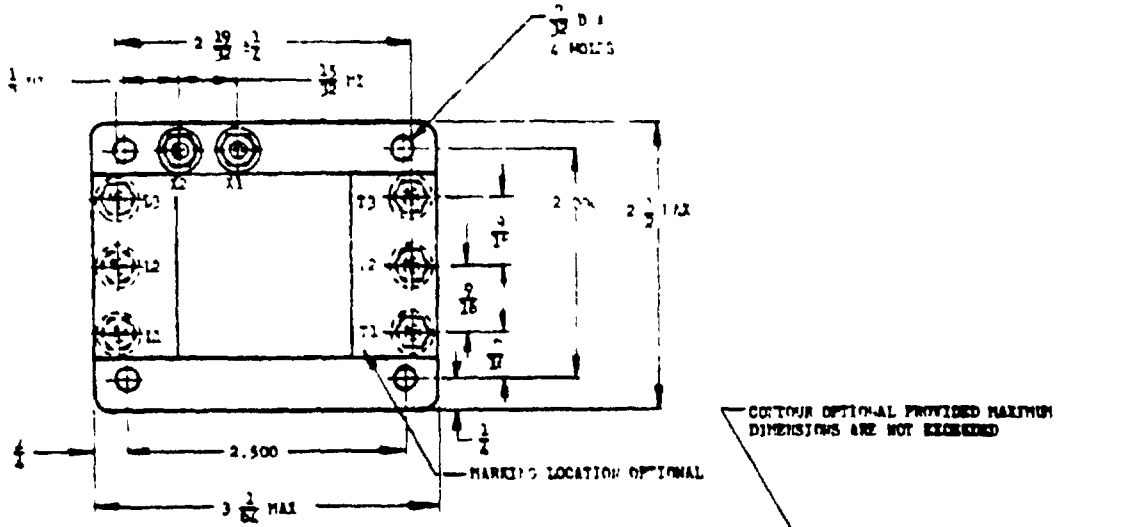



CIRCUIT

DETAIL REQUIREMENTS

(A)	NOMINAL OPERATING VOLTAGE	
	COIL	28 VOLTS DC
	CONTACTS AC & CYCLE, 115/200 VOLTS OR 28 VOLTS DC	28 VOLTS DC
(B)	PICKUP VOLTAGE	18 VOLTS DC
(C)	DROPOUT VOLTAGE	7 VOLTS DC +0, -5.5
(D)	RATED LOAD	
	RESISTIVE (AC 400 CYCLE, 115/200 VOLTS OR 28 VOLTS DC)	5 AMP
	MOTOR (AC 400 CYCLE, 115/200 VOLTS OR 28 VOLTS DC)	5 AMP
	INDUCTIVE (DC 28 VOLTS)	2 AMP
(E)	COIL CURRENT (MAXIMUM AT 29 VOLTS DC)	.25 AMP
(F)	MINIMUM OPERATING PERIOD	3 HOURS
(G)	MINIMUM OPERATING CYCLES	50,000
(H)	MAXIMUM WEIGHT	.5 POUNDS
(I)	RATED DUTY	CONTINUOUS
(J)	MAXIMUM CONTINUOUS COIL VOLTAGE	29 VOLTS DC

AN PART NO.
AN3335-1

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES FRACTIONS ±1/16, DECIMALS ±.010.

(3) FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO 337.

(3) INACTIVE FOR DESIGN AFTER 17 DECEMBER 1957
NO SUPERSEDING STANDARD

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3335
MIL-R-6106	RELAY, 5 AMP, 3PST, UNSEALED, CLASS O	

APPROVED 7 Oct 48 REVISED (1) 7 Aug 53 (2) 15 Aug 56 (3) 17 Dec 57

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.

Reference & Research Division