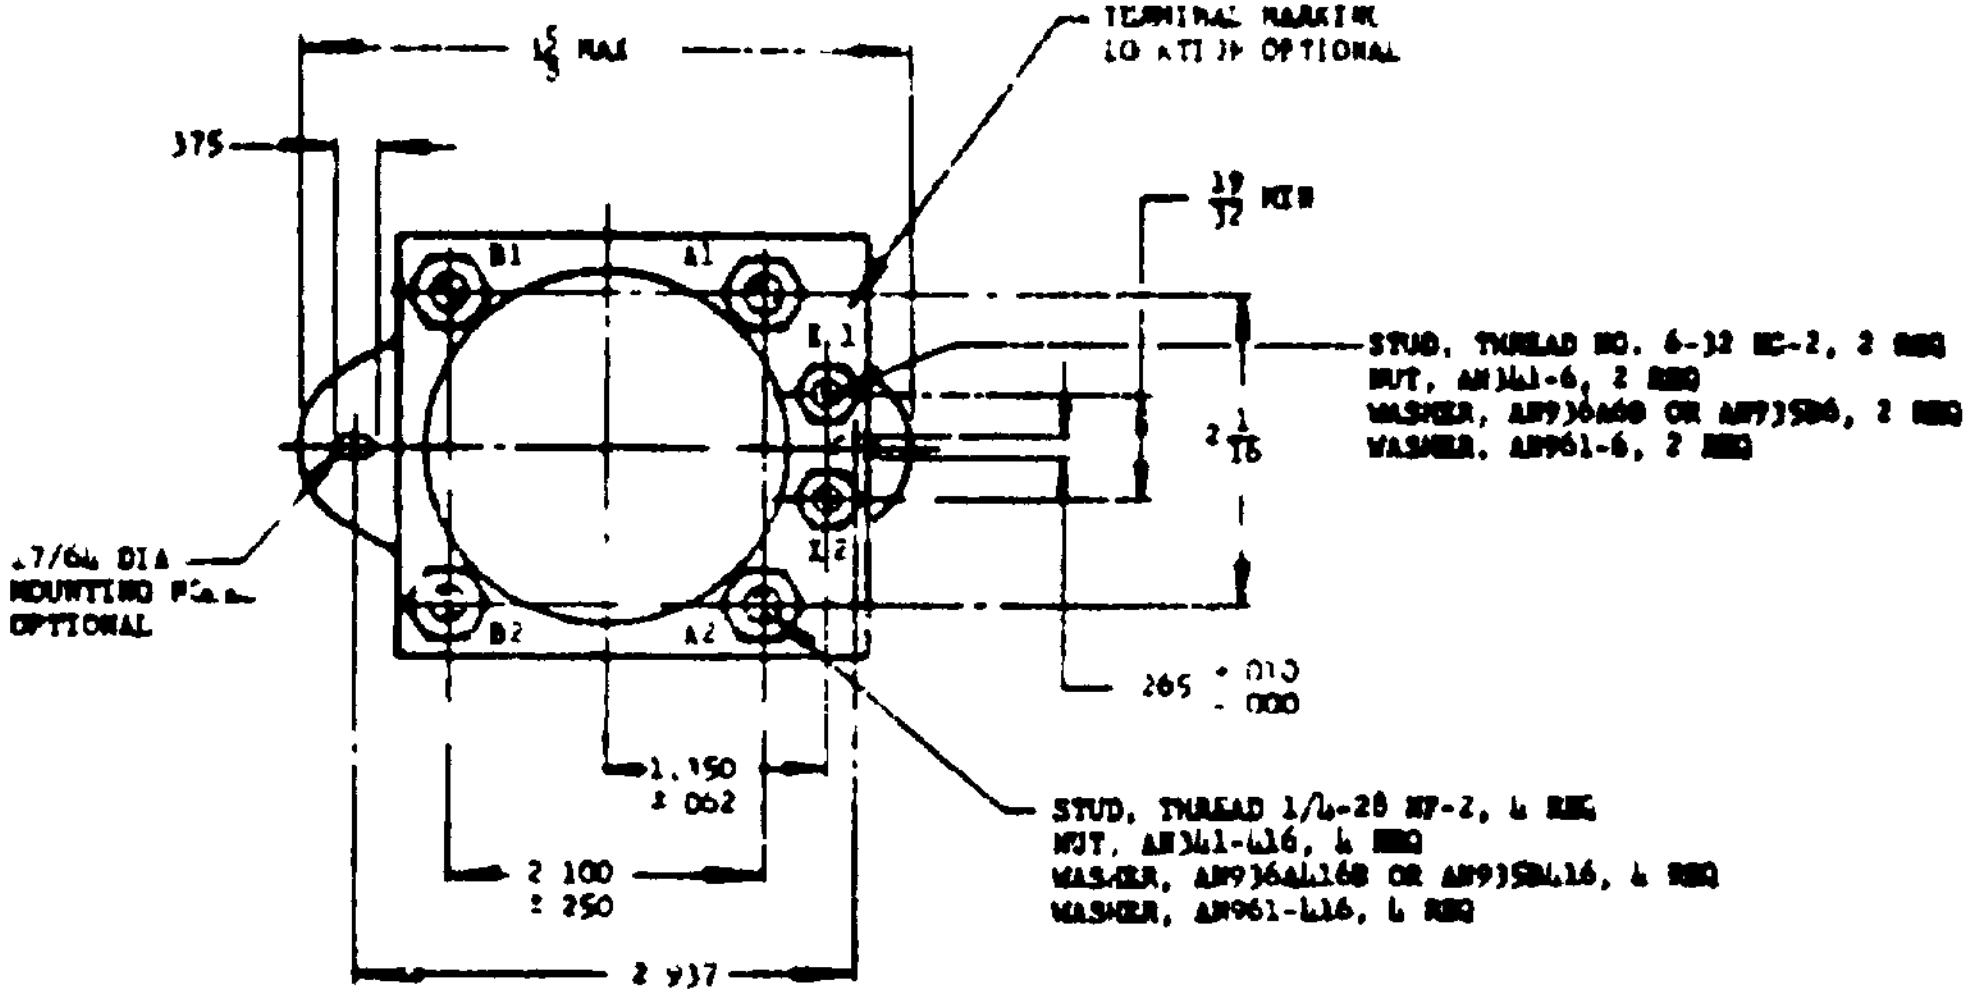
TERMINAL MARKING LOCATION OPTIONAL
1 5/8 MAX
375
19/32 MIN
B1
A1
X1
X2
B2
A2
STUD, THREAD NO. 6-32 NC-2, 2 REQ
NUT, AN341-6, 2 REQ
WASHER, AN936A6 OR AN935B6, 2 REQ
WASHER, AN961-6, 2 REQ
2 1/16
17/64 DIA MOUNTING PLATE OPTIONAL
265 +.010 -.000
1.150 ±.062
STUD, THREAD 1/4-28 NF-2, 4 REQ
NUT, AN341-416, 4 REQ
WASHER, AN936A416 OR AN935B416, 4 REQ
WASHER, AN961-416, 4 REQ
2 100 ±.250
2 937

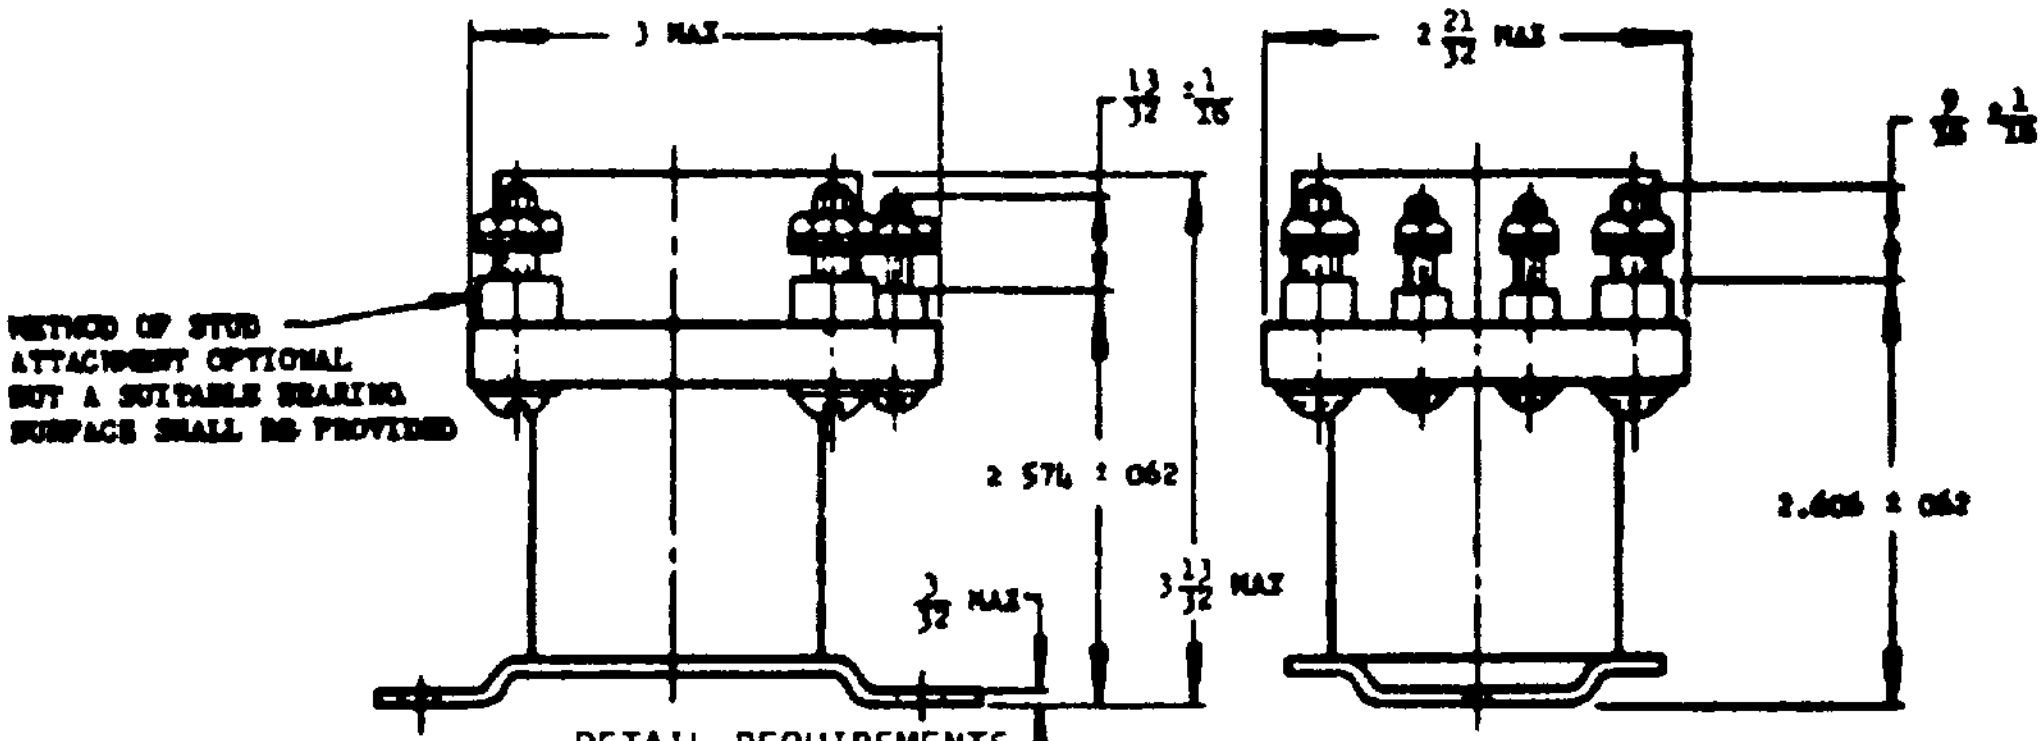
3 MAX
13/32 ±1/16
2 21/32 MAX
9/16 ±1/16
METHOD OF STUD ATTACHMENT OPTIONAL BUT A SUITABLE BEARING SURFACE SHALL BE PROVIDED
2 574 ±.062
3/32 MAX
3 13/32 MAX
2.406 ±.062

DETAIL REQUIREMENTS


A1
A2
B1
B2
X1
X2

CIRCUIT

AN PART NO
AN3362-1

(A)	Maximum operating voltage	29 volts
(B)	Pickup voltage	20 volts
(C)	Dropout voltage	7 volts +0, -5 5
(D)	Rated load (Per pole)	
	Resistive (DC)	100 amp
	Resistive (AC 400-cycles, 115 volts)	75 amp
	Inductive	80 amp
	Motor (DC)	80 amp
	Motor (AC 400-cycles, 115 volts)	65 amp
(E)	Coil current	0 6 amp
(F)	Minimum operating period	3 hours
(G)	Minimum operating cycles	50,000
(H)	Maximum weight	1 5 pounds
(I)	Rated duty	Continuous
(J)	Nominal coil voltage	28 volts

For resistive load tests, one set of contacts shall be tested with rated resistive DC load and the other set of contacts shall be tested with rated resistive AC load

Dimensions in inches Unless otherwise specified, tolerances Fractions ±1/32, decimals ± 010

Coil temperature rise and contact drop of specification MIL-R-6106 are not applicable

For definition and application of drawing status notes, see AN Bulletin No 337

⑤ INACTIVE FOR NEW DESIGN AFTER 30 AUGUST 1957

APPROVED [illegible] April 1 [illegible]   REVISED ⑤ 9 APRIL 1976

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document

Review activities AF-80

P A USAF-85 Other Cust ARMY-AV	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3362
Procurement Specification MIL-R-6106	**RELAY, 100 AMP, 2PST, UNSEALED, CLASS O**	

5945-0415

U S GOVERNMENT PRINTING OFFICE 1976 603 766/3622

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.