INCH-POUND

AN3372
REVISION 7
19 OCTOBER 2020
SUPERSEDING
AN3372
REVISION 6
23 SEPTEMBER 2010

DETAIL SPECIFICATION SHEET

# RELAY, 200 AMP, 2PST, CLASS O, UNSEALED

Inactive for new design after 25 November 1957.
No superseding document.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-PRF-6106.

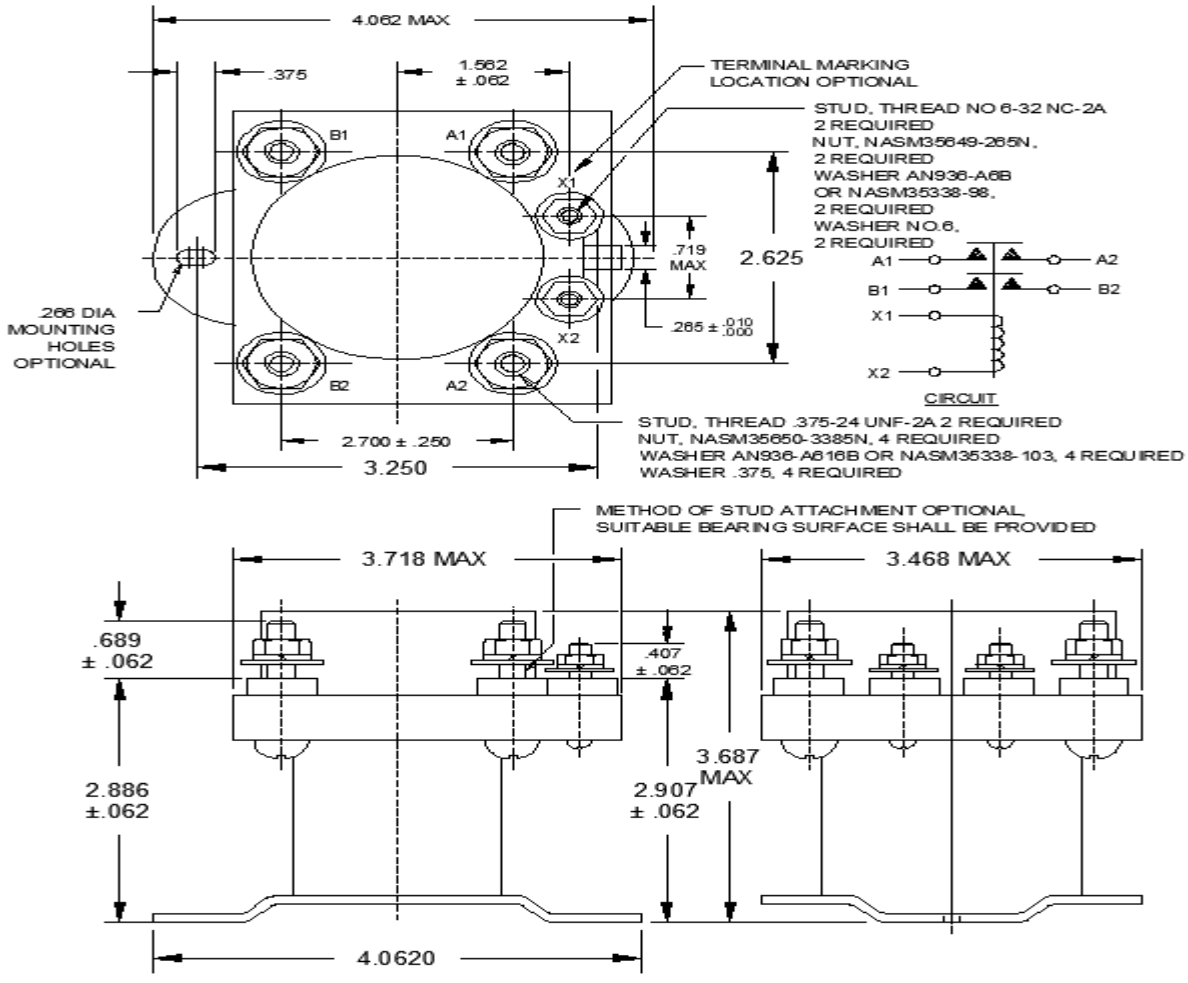



FIGURE 1. Configurations and dimensions.

AMSC N/A

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm |
|---|---|---|---|
| .010 | 0.254 | .907 | 23.038 |
| .031 | 0.787 | 1.562 | 39.675 |
| .062 | 1.575 | 2.625 | 66.675 |
| .093 | 2.362 | 2.700 | 68.58 |
| .250 | 6.35 | 2.886 | 73.304 |
| .265 | 6.731 | 3.250 | 82.55 |
| .266 | 6.756 | 3.468 | 88.087 |
| .375 | 9.525 | 3.687 | 93.650 |
| .407 | 10.338 | 3.718 | 94.437 |
| .689 | 17.501 | 4.062 | 103.175 |
| .719 | 18.263 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.016 (0.406 mm).

FIGURE 1. Configurations and dimensions - Continued.

REQUIREMENTS

Operating cycles: 50,000 minimum.

Contact data:

Contact voltage drop: Not applicable.

Coil temperature rise: Not applicable.

Load ratings: See Table I.

TABLE I - Rated contact load (per pole).

| Type of load 1/ | Amperes |
|---|---|
| Resistive (28 Volts DC) | 200 |
| Resistive (400 Hz, 115 Volts AC) | 150 |
| Inductive (28 Volts DC) | 100 |
| Motor (28 Volts DC) | 150 |
| Motor (400 Hz, 115 Volts AC) | 100 |

1/ For resistive load tests, one set of contacts shall be tested with rated resistive DC load and the other set of contacts shall be tested with rated resistive AC load.

Overload current: Not applicable.

Rupture current: Not applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.

Coil data:

Nominal coil voltage: 28 volts.

Maximum operating voltage: 29 volts.

Pickup voltage: 20 volts.

Hold voltage: 7 volts.

Dropout voltage: 1.5 volts.

Rated duty: Continuous.

Coil current: 0.8 amperes, maximum.

Physical data:

Weight: 2.5 pounds, maximum.

Qualification by similarity: See MIL-PRF-6106.

Retention of qualification: To retain qualification, the manufacturer shall submit group A acceptance reports on a yearly basis to the qualifying activity.

Quality conformance inspection: Performance of groups B and C tests are not applicable.

Part or Identifying Number (PIN): AN3372-1.

Supersession information: Supersedes USAF Specification Number 32538.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-PRF-6106, this document references the following:
NASM35649 AN936 NASM35338 NASM35650

Custodians:
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-2020-049)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.