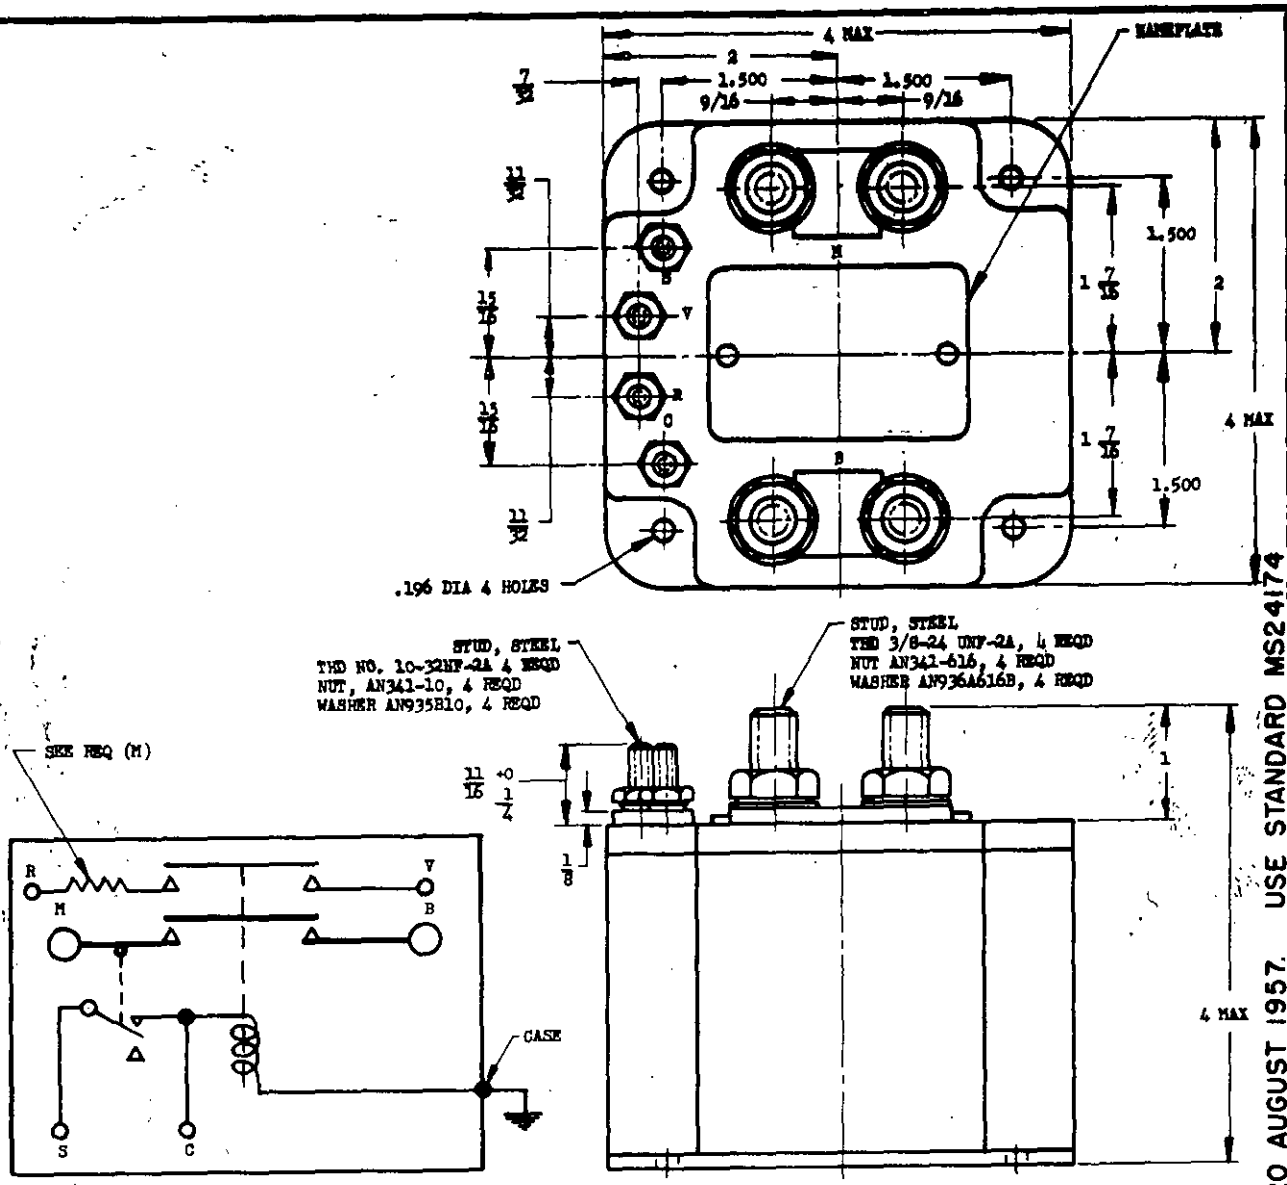


AN PART NO.	CASE
~~(a) AN3391-1~~	
~~(e) AN3391-2A~~	~~ALUMINUM~~
AN3391-2B	STEEL

DETAIL REQUIREMENTS:

(A)	MAXIMUM OPERATING VOLTAGE	29 VOLTS
(B)	PICK-UP VOLTAGE (MAX)	(c) 17 VOLTS
(C)	DROP-OUT CURRENT	(d) (b) 235 ±15 AMP
(D)	DROP-OUT VOLTAGE (MAX)	(c) 14 VOLTS
(E)	PICK-UP CURRENT (MAX)	(d) 490 AMP
(F)	RATED MOTOR LOAD	600 AMP
(G)	COIL CURRENT (MAX)	4.5 AMP
(H)	MINIMUM OPERATING PERIOD	3 MINUTES
(I)	MINIMUM OPERATING CYCLES	25,000
(J)	MAXIMUM WEIGHT: WITH ALUMINUM CASE	3 LB 3 OZ
	WITH STEEL CASE	3 LB 11 OZ
(K)	RATED DUTY	INTERMITTENT (OFF TIME - 10 SEC MIN)
(L)	NOMINAL COIL VOLTAGE	28 VOLTS
(M)	SIGNAL RESISTOR	20 OHMS ±10%; 20W

(a) PART NO. AN3391-1 INACTIVE FOR DESIGN AFTER 27 OCT 52. PART NO. AN3391-2A AND AN3391-2B REPLACE AND ARE INTERCHANGEABLE WITH PART NO. AN3391-1.
FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.
(b) DROP-OUT CURRENT TO BE DETERMINED WITH MAIN CONTACTOR ENERGIZED AT 14 TO 29 VOLTS DC.
(c) PICK-UP AND DROP-OUT VOLTAGE SHALL BE MEASURED FROM TERMINAL "C" TO CASE.
(d) PICK-UP AND DROP-OUT CURRENT SHALL BE THE CURRENT FLOWING BETWEEN TERMINALS "M" AND "B".
(e) PART NO. AN3391-2A INACTIVE FOR DESIGN AFTER 7 AUGUST 1953.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/16, DECIMALS ±.010.

THE AIRPLANE OR ENGINE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATIONS.

③INACTIVE FOR DESIGN AFTER 20 AUGUST 1957. USE STANDARD MS24174

APPROVED 24 Aug 48 REVISED (1) 27 Oct 52 (2) 7 Aug 53 (3) 20 Aug 57

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3391
MIL-R-6106	RELAY, SOLENOID - 600 AMP, AUTOMATIC DROP-OUT	

SUPERSEDES BUAER DWG 52A1A1-1

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all superseded standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for such new design, not later than 6 months after the latest date of approval shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.