This drawing was approved by joint action of the Air Force and Navy Departments for this product. This drawing supersedes all antecedent standard drawings for the Air Force-Navy product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

Review activities:
USAF - 11, 82, 85


PROCUREMENT SPECIFICATION
MIL-C-7974

AIR FORCE-NAVY AERONAUTICAL STANDARD

CABLE ASSEMBLY, POWER, ELECTRICAL, 115/200 VOLTS, 3 PHASE

AN3430

⑨ CANCELED AFTER 23 FEB 1981
USE MS90328

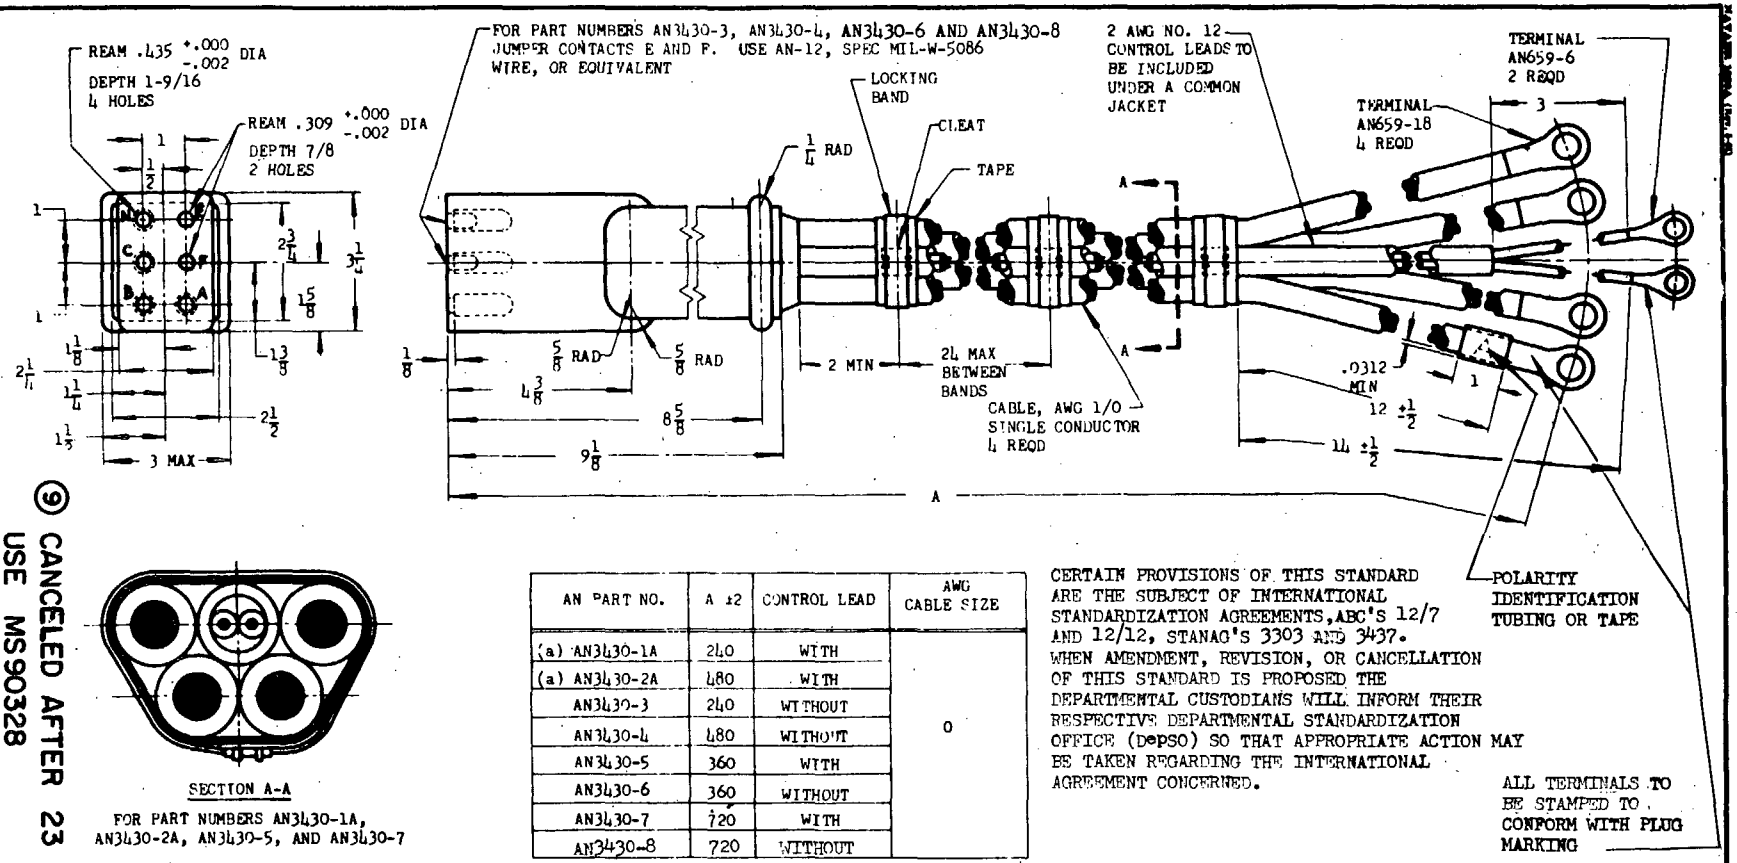


SECTION A-A

FOR PART NUMBERS AN3430-1A, AN3430-2A, AN3430-5, AND AN3430-7

AN PART NO.	A ±2	CONTROL LEAD	AWG CABLE SIZE
(a) AN3430-1A	240	WITH	0
(a) AN3430-2A	480	WITH	
AN3430-3	240	WITHOUT	
AN3430-4	480	WITHOUT	
AN3430-5	360	WITH	
AN3430-6	360	WITHOUT	
AN3430-7	720	WITH	
AN3430-8	720	WITHOUT	

CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS, ABC'S 12/7 AND 12/12, STANAG'S 3303 AND 3437. WHEN AMENDMENT, REVISION, OR CANCELLATION OF THIS STANDARD IS PROPOSED THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE (DePSO) SO THAT APPROPRIATE ACTION MAY BE TAKEN REGARDING THE INTERNATIONAL AGREEMENT CONCERNED.

ALL TERMINALS TO BE STAMPED TO CONFORM WITH PLUG MARKING



SECTION A-A

FOR PART NUMBERS AN3430-3, AN3430-4, AN3430-6, AND AN3430-8

(a) PREVIOUS PART NUMBERS AN3430-1; -2 INACTIVE FOR DESIGN AFTER 7 APRIL 1950. PART NUMBERS AN3430-1A; -2A REPLACE AND ARE INTERCHANGEABLE WITH PART NUMBERS AN3430-1 AND -2, RESPECTIVELY.
FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE MIL-STD-32.
CURRENT RATINGS SHALL BE 200 AMPERES FOR CONTINUOUS OPERATION, 300 AMPERES FOR 1/2 HOUR, AND 600 AMPERES FOR 3 MINUTES.
POLARITY IDENTIFICATION TUBING OR TAPE SHALL HAVE POLARITY STENCIL CUT OR PERMANENTLY IMPRINTED ON BOTH SIDES. ID OF TUBING TO PROVIDE CLOSE NONSLIP FIT OVER CABLE JACKET.
ALL SOCKET CONTACTS SHALL HAVE A SIDE PLAY OF .010 AND SHALL PROVIDE SPRING ACTION TO MAINTAIN CONTACT PRESSURE.
MATERIAL: TAPE, SPECIFICATION MIL-I-7798, AND SHALL BE APPLIED TO A MINIMUM THICKNESS OF .040 INCH UNDER LOCKING BANDS.
LOCKING BANDS: STAINLESS STEEL, 1/2 WIDE, .015 THICK.
CONTACTS: E AND F TELLURIUM COPPER OR SILVER-PLATED BRASS. A, B, C, AND N TELLURIUM COPPER OR EQUAL.
PLUG: MOLDED OR FABRICATED BUNA COMPOUND OR OTHER MATERIAL SUITABLE FOR -65°F OPERATION.
CABLE: SPECIFICATION MIL-C-5756.
TUBING: WHITE EXTRUDED P.V.C.
USE DRAWING AN3114 FOR RECEPTACLE USED WITH THIS CABLE ASSEMBLY.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64.
(b) CONSTRUCTION TO BE SUCH THAT THE LARGE PINS CANNOT MAKE CONTACT WITH THE SMALL PINS IN CASE OF ATTEMPTED MISMATING
(c) FOR NAVY APPLICATIONS USE MS25486 (WEP)

FED. SUP. CLASS. 6150

APPROVED 30 Sep 48 REVISED (1) 7 Apr 50 (2) 14 Feb 51 (3) 14 Jan 52 (4) 10 Nov 52 (5) 23 Dec 52 (6) 7 Jun 55 (7) 28 Jun 57 (8) 19 Apr 67 (9) 6 MAR 81

Source: https://assist.dla.mil - U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/1499
Check the source to verify that this is the current version before use.