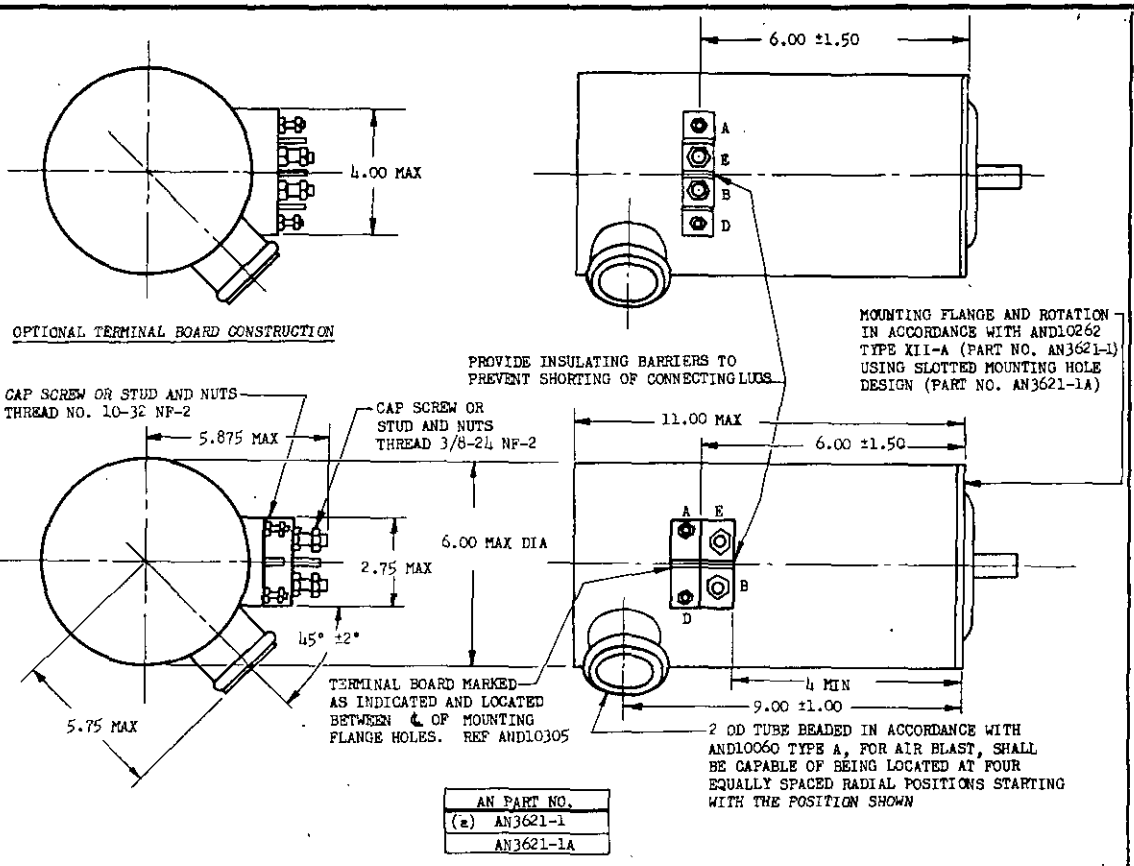


AN PART NO.
(a) AN3621-1
AN3621-1A

GENERATOR CHARACTERISTICS

PROPERTY	VALUE
RATED VOLTAGE, VOLTS	30
RATED CURRENT, NOMINAL, AMPERES	100
RATED SPEED, RPM	4 000/8 000
CONTINUOUS OPERATING SPEED, RPM	6 300
MIN SPEED FOR REGULATION, RPM	4500
MAX SPEED FOR REGULATION, RPM	10 300
OVERSPEED, RPM	11 000
REGULATED FIELD CURRENT, MAX, AMPERES	8
POWER TO BE DISSIPATED BY REGULATOR, MAX, WATTS	90
WEIGHT, MAX, POUNDS	28
EFFICIENCY, MIN, 70 TO 100 PERCENT LOAD, PERCENT	70
MOMENT OF OVERHANG, MAX, POUND-INCHES	175
MINIMUM NATURAL FREQUENCY, CPS	275

(a) PART NO. AN3621-1A IS INTERCHANGEABLE WITH PART NUMBER AN3621-1.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

GENERATOR CLEARANCE NOT INDICATED ON THIS DRAWING SHALL NOT EXCEED THE REQUIREMENTS OF AND10305.

THE AIRCRAFT OR ENGINE MANUFACTURER SHALL ALLOW CONNECTING LEAD LENGTH AND BLAST TUBE LENGTH FOR THE LIMITING DIMENSIONS SHOWN ON THIS DRAWING.

THE AIRCRAFT OR ENGINE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON DRAWING AND10305 FOR INSTALLATION.

GENERATOR TO BE INSTALLED ON DRIVE CONFORMING TO DRAWING AND20002.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.062.

AN DESIGNATIONS SHALL NOT BE SHOWN ON GENERATOR UNTIL APPROVAL HAS BEEN RECEIVED FROM THE AERONAUTICAL STANDARDS GROUP AND THE GENERATOR FULLY MEETS THE REQUIREMENTS OF THE SPECIFICATION AND DRAWING.

THIS DRAWING SHALL NOT BECOME EFFECTIVE UNTIL THE GENERATOR SHOWN HEREON IS LISTED IN THE APPLICABLE QUALIFIED PRODUCTS LIST.

QUALIFICATION TESTS SHALL BE CONDUCTED UNDER THE SUPERVISION OF THE BUREAU OF AERONAUTICS, NAVY DEPARTMENT, WASHINGTON 25, D. C.

A PROTECTIVE COVER OF FLEXIBLE INSULATING MATERIAL SHALL BE PROVIDED FOR THE TERMINAL BLOCK.

② CANCELLED AFTER 25 JULY 1980. NO SUPERSEDING STANDARD.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3621
MIL-G-6162	GENERATOR - DIRECT CURRENT, 100 AMPERE 30 VOLT, HIGH SPEED RANGE	

APPROVED 19 Apr 48 REVISED ① 5 Sep 51 ② 25 JULY 1980

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

Source: https://assist.dla.mil -- Downloaded: 20260-26114:202
Check the source to verify that this is the current version before use.