
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

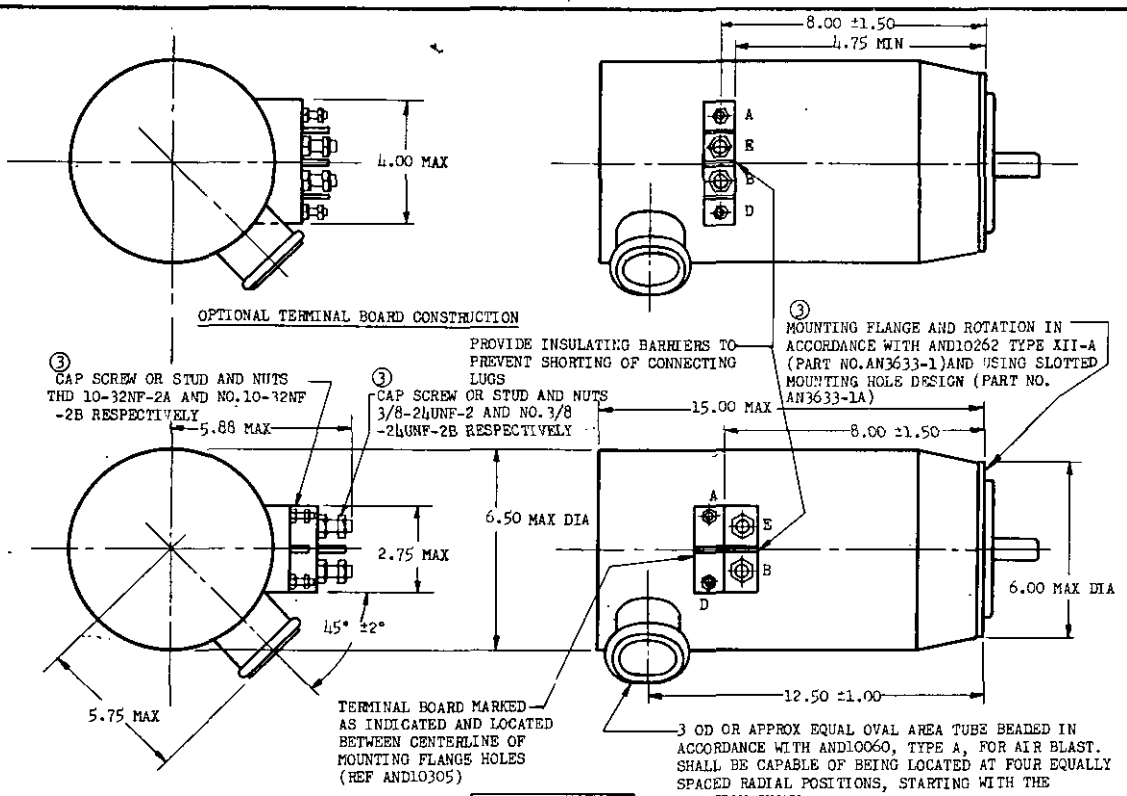


| | AN PART NO. |
|---|---|
| (a) | AN3633-1 |
| ③ | AN3633-1A |

GENERATOR CHARACTERISTICS

| PROPERTY | VALUE |
|---|---|
| RATED VOLTAGE, VOLTS | 30 |
| RATED CURRENT, NOMINAL, AMPERES | 300 |
| RATED SPEED, RPM | 3 000/8 000 |
| CONTINUOUS OPERATING SPEED, RPM | 6 000 |
| MIN SPEED FOR REGULATION, RPM | 3 500 |
| MAX SPEED FOR REGULATION, RPM | 10 000 |
| OVER SPEED, RPM | 11 000 |
| REGULATED FIELD CURRENT, MAX, AMPERES | 8 |
| POWER TO BE DISSIPATED BY REGULATOR, MAX, WATTS | 90 |
| WEIGHT, MAX POUNDS | ③ 61 |
| EFFICIENCY, MIN, 70 TO 100 PERCENT LOAD, PERCENT | 65 |
| MOMENT OF OVERHANG, MAX, POUND - INCHES | 350 |
| MINIMUM NATURAL FREQUENCY, CPS | 275 |

(a) PART NO. AN3633-1A IS INTERCHANGEABLE WITH AN3633-1.

AN DESIGNATIONS SHALL NOT BE SHOWN ON GENERATOR UNTIL APPROVAL HAS BEEN RECEIVED FROM THE AERONAUTICAL STANDARDS GROUP AND THE GENERATOR FULLY MEETS THE REQUIREMENTS OF THE SPECIFICATION AND DRAWINGS.

THIS DRAWING SHALL NOT BECOME EFFECTIVE UNTIL THE GENERATOR SHOWN HEREON IS LISTED IN THE APPLICABLE QUALIFIED PRODUCTS LIST.

GENERATOR TO BE INSTALLED ON DRIVE CONFORMING TO DRAWING AND20002.

THE AIRCRAFT OR ENGINE MANUFACTURER SHALL ALLOW CONNECTING LEAD LENGTH AND BLAST TUBE LENGTH FOR THE LIMITING DIMENSIONS SHOWN ON THIS DRAWING.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.06.

THE AIRCRAFT OR ENGINE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAX DIMENSIONS SHOWN ON DRAWING AND10305 FOR INSTALLATION.

QUALIFICATION TESTS SHALL BE CONDUCTED UNDER THE SUPERVISION OF THE WRIGHT AIR DEVELOPMENT CENTER, WRIGHT-PATTERSON AIR FORCE BASE, DAYTON, OHIO.

③ GENERATOR CLEARANCE REQUIREMENTS NOT INDICATED ON THIS DRAWING SHALL NOT EXCEED AND10305.

③ A PROTECTIVE COVER OF FLEXIBLE INSULATING MATERIAL SHALL BE PROVIDED FOR THE TERMINAL BLOCK.

④ CANCELLED AFTER 3 MARCH 1975 SUPERSEDED BY MS 90332

APPROVED 9 Mar 49 REVISED (1) 12 Oct 49 (2) 28 Feb 51 (3) 12 Dec 52 (4) 3 March 75

| PROCUREMENT SPECIFICATION | AIR FORCE-NAVY AERONAUTICAL STANDARD | AN3633 |
|---|---|---|
| MIL-G-6162 | GENERATOR-DIRECT CURRENT, 300 AMPERE 30 VOLT, WIDE SPEED RANGE | |

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.