NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of commercial supplies, or for use in new design, not later than 6 months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

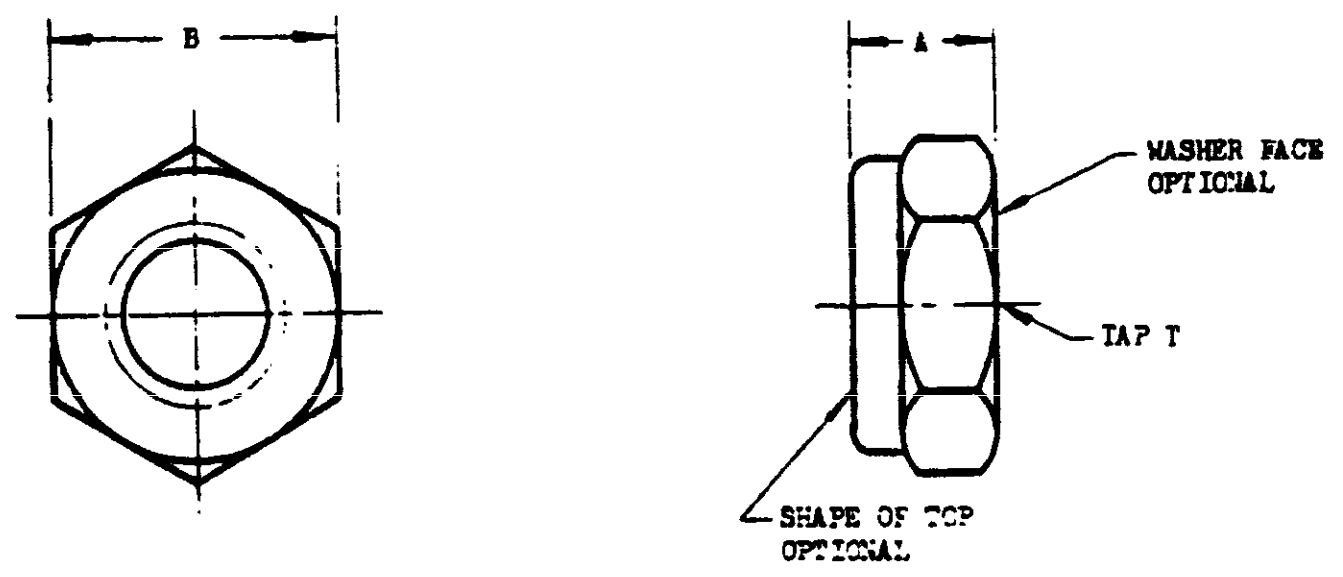

FINE THREAD

DASH NUMBERS			TAP T	(a) A +.016	B -.002 -.010
STEEL	COPPER BASE ALLOY	ALUMINUM ALLOY			
(b) ~~640~~			~~NO. 6-40 NF-2~~	~~.125~~	~~.312~~
~~836~~	~~B836~~		~~NO. 8-36 NF-2~~	~~.172~~	~~.344~~
1032	B1032	D1032	NO. 10-32 NF-3	.172	.375
428	B428	D428	1/4 -28 NF-3	.203	.438
524	B524	D524	5/16-24 NF-3	.250	.500
624	B624	D624	3/8 -24 NF-3	.266	.563
720	B720	D720	7/16-20 NF-3	.312	.625
820	B820	D820	1/2 -20 NF-3	.312	.750
918	B918	D918	9/16-18 NF-3	.359	.875
1018	B1018	D1018	5/8 -18 NF-3	.391	.938
1216	B1216	D1216	3/4 -16 NF-3	.406	1.063
1414	B1414	D1414	7/8 -14 NF-3	.469	1.250
1614	B1614	D1614	1 -14 NF-3	.562	1.438
1812	B1812	D1812	1-1/8 -12 NF-3	.656	1.625
2012	B2012	D2012	1-1/4 -12 NF-3	.750	1.813

COARSE THREAD

632		D632	NO. 6-32 NC-2	.125	.312
832		D832	NO. 8-32 NC-2	.172	.344
		(b) ~~D1024~~	~~NO. 10-24 NC-2~~	~~.172~~	~~.375~~

(a) MINIMUM A NOT SPECIFIED. LIMITED ONLY BY STRENGTH REQUIREMENT OF SPECIFICATION.

(b) DASH NOS. 640 THRU 836 AND B836 FOR FINE THREAD NUTS AND D1024 FOR COARSE THREAD NUTS INACTIVE FOR DESIGN AFTER 14 APRIL 1949.

④ (c) QUALIFICATION NOT REQUIRED FOR DASH NO. 640, 836, AND 1024.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTE SEE ANA BULLETIN NO. 337.

ADD A AFTER DASH NUMBER FOR NUTS HAVING NON-METALLIC INSERTS.

ADD C AFTER DASH NUMBER FOR NUTS FABRICATED ENTIRELY FROM METAL.

EXAMPLES OF PART NOS.:
AN364-428 = 1/4-28 STEEL NUT, EITHER ALL METAL OR WITH NON-METALLIC INSERT.
AN364D428 = 1/4-28 ALUMINUM ALLOY NUT, EITHER ALL METAL OR WITH NON-METALLIC INSERT.
AN364B428A = 1/4-28 COPPER BASE ALLOY NUT WITH NON-METALLIC INSERT.
AN364-428C = 1/4-28 STEEL NUT, ALL METAL

DIMENSIONS IN INCHES.

④ **INACTIVE FOR DESIGN** AFTER 13 MARCH 1957. USE MS21042, MS21083 OR MS21245.

FOR INSTALLATION INSTRUCTIONS SEE DRAWING AN[illegible].

④ ~~MS20364 PARTS AND AN364 PARTS OF LIKE DASH NUMBERS ARE UNIVERSALLY, FUNCTIONALLY AND DIMENSIONALLY INTERCHANGEABLE.~~

④ CANCELED, EXCEPT DASH NOS. 640, 836 AND 1024 AFTER 22 JULY 1969. USE MS21042, MS21083 OR MS21245. SEE THE INTERCHANGABILITY TABLE ON THESE STANDARDS FOR SUBSTITUTIVE PARTS.

APPROVED 9 Apr 45 REVISED ① 14 Apr 49 ② 13 Mar 57 ③ 5 Sep 58 ④ 22 July 69

PROCUREMENT SPECIFICATION
④ (c) MIL-N-25027

AIR FORCE-NAVY AERONAUTICAL STANDARD

NUT-SELF LOCKING, THIN, 250° F

AN364

SUPERSEDES USAF DRAWING 364 AND NAF DRAWING 1137

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:15Z
Check the source to verify that this is the current version before use.