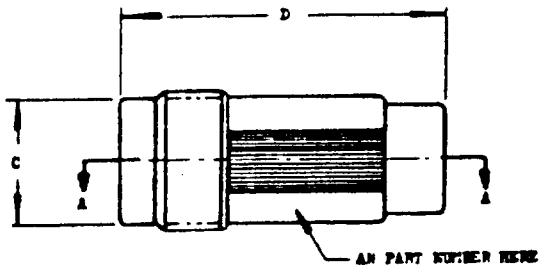

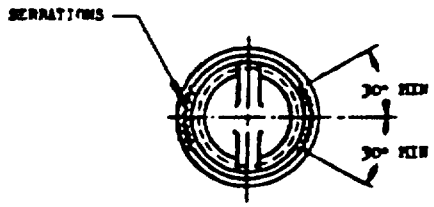

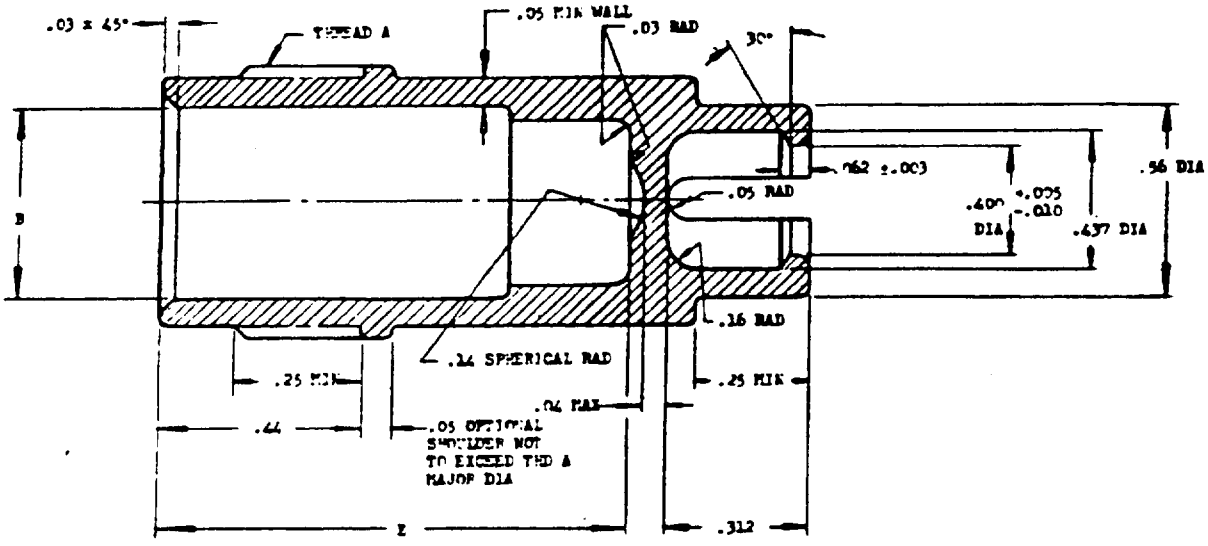

SECTION A-A

	AN PART NO.	THREAD A	B DIA	C DIA	D	Z	COLOR
	AN4060-1	5/8-24 NS SPECIAL FD .595 .587	.438	.56	1.41	1.020	RED
	~~AN4060-2~~	~~9/16-20 NS SPECIAL FD .556 .538~~	~~.410~~	~~.50~~	~~1.41~~	~~1.020~~	~~GREEN~~
(6)	AN4060-3	3/4-20 NS SPECIAL FD .724 .706	.560	.67	2.15	1.770	WHITE
(6)	AN4060-4	5/8-24 NS .595 SPECIAL FD .587	.438	.56	1.41	1.020	TRANSPARENT
(6)	AN4060-5	3/4-20 NS .724 SPECIAL FD .706	.560	.67	2.15	1.770	TRANSPARENT

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

MATERIAL: PLASTIC, AMS3622.

BREAK ALL SHARP EDGES. UNLESS OTHERWISE SPECIFIED, ALL FILLETS .031 MAX RAD.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO PLACE DECIMALS ±.02, THREE PLACE DECIMALS ±.010, ANGLES ±1/2°.

(a) PART NO. AN4060-2 INACTIVE FOR DESIGN AFTER 15 MAY 1943.

APPROVED 16 Jan 42 REVISED (1) 7 Mar 42 (2) 15 May 43 (3) 8 May 45 (4) 9 Jan 52 (5) 26 Feb 54 (6) 27 Dec 63

P.A. Navy-Mcgse
OTHER CUSTODIANS
USAF-ASD
ARMY-MC
(6)

PROCUREMENT SPECIFICATION No.

AIR FORCE-NAVY AERONAUTICAL STANDARD

PROTECTOR - IGNITION LEAD TERMINAL

AN4060

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.