
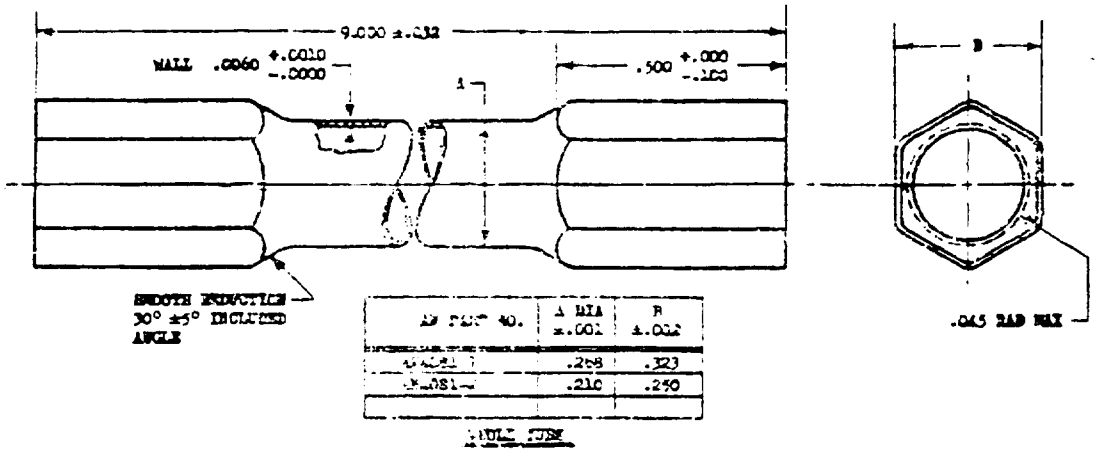



AN PART NO.	A DIA ±.001	B ±.012
AN4081-3	.268	.323
AN4081-4	.210	.250

FULL TUBE

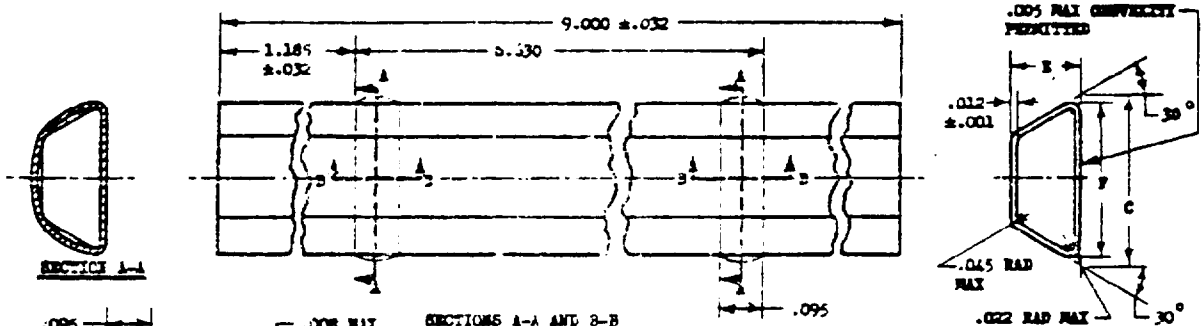

AN PART NO.	C ±.003	E ±.003	CORRESPONDING WHOLE TUBE	F MIN
AN4081-1	.373	.162	AN4081-1	.339
AN4081-2	.249	.125	AN4081-2	.255

HALF TUBE

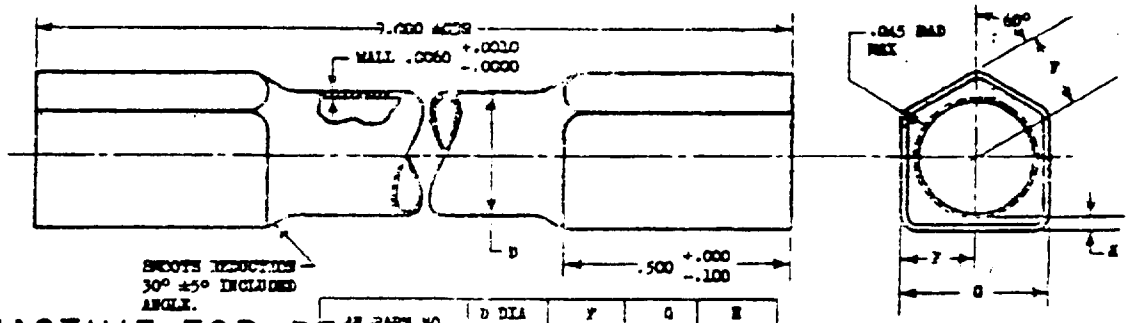

AN PART NO.	D DIA ±.001	F ±.001	G ±.005	E ±.005
AN4081-3	.268	.162	.323	.040
AN4081-4	.210	.125	.250	.030

REDUCED END TUBE

INACTIVE FOR DESIGN. NO SUPERSEDING AN STANDARD.

FOR DEFINITION AND APPLICATION OF DRAWING NOTES, SEE ANA STANDARD NO. 39.

MATERIAL: COPPER, SPEC. QQ-C-501
AXIS OF TUBE SHALL NOT DEVIATE FROM STRAIGHT LINE MORE THAN .012.
ALL TUBES SHALL BE INDIVIDUALLY TESTED UNDER WATER WITH A MIN. INTERNAL AIR PRESSURE OF 100 P.S.I. APPLIED FOR A PERIOD OF NOT LESS THAN 2-1/2 SECONDS. IF A BRIGHT DIP IS USED PRIOR TO COOLER ASSEMBLY, THIS TEST SHALL BE CONDUCTED IMMEDIATELY AFTER THE BRIGHT DIP. ANY VISIBLE LEAKAGE SHALL BE CAUSE FOR REJECTION.
TUBES SHALL BE CAPABLE OF WITHSTANDING 300 P.S.I. EXTERNALLY APPLIED PRESSURE WITHOUT COLLAPSE.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMALS ±.010, ANGLES ±1/2°.

APPROVED 15 Jul 42 REVISED 1 30 Sep 42 2 13 May 44 3 16 Nov 45 4 30 Jun 53

PROCUREMENT SPECIFICATION	ARMY-NAVY AERONAUTICAL STANDARD	AN4081
NONE	TUBE - OIL COOLER	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.