NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

PROCUREMENT SPECIFICATION
MIL-V-5536

AIR FORCE-NAVY AERONAUTICAL STANDARD

VALVE — OIL COOLER TEMPERATURE REGULATING WITH SURGE PROTECTION

AN4103

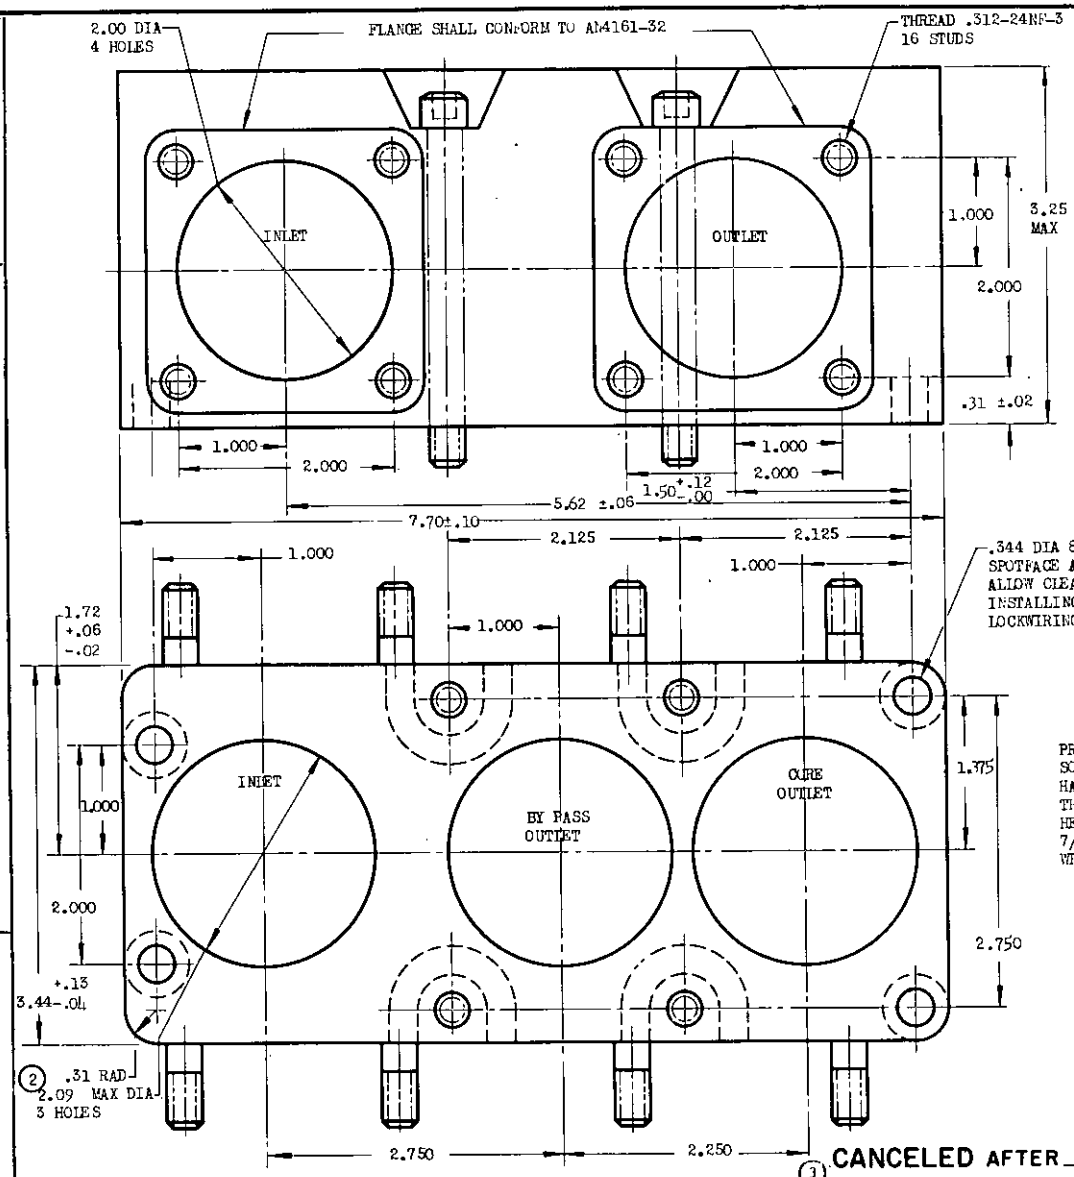

AN PART NO.	CLASS	(a) THERMOSTAT DESIGN TEMPERATURE (°F)
AN4103-1	1 AND 2	140
AN4103-2	1 AND 2	160
AN4103-3	1 AND 2	175
AN4103-4	1 AND 2	185
AN4103-5	1 AND 2	195
AN4103-6	1	140
AN4103-7	1	160
AN4103-8	1	175
AN4103-9	1	185
AN4103-10	1	195

(a) SEE PROCUREMENT SPECIFICATION FOR DEFINITION OF THERMOSTAT DESIGN TEMPERATURE.

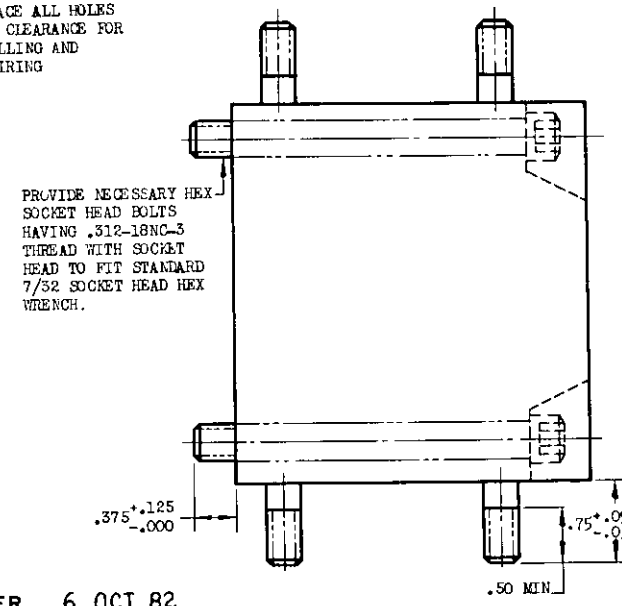

3 CANCELED AFTER 6 OCT 82. USE MS 29593.

WEIGHT: 5 LB MAXIMUM
DIMENSION IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO PLACE DECIMALS ±.03; THREE PLACE DECIMALS ±.005.

APPROVED 24 Feb 50 REVISED 1 12 Mar 52 2 8 Jul 52 3 6 Oct 82

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.