NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the War and Navy Departments as the Army-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of commercial supplies, or for use in new designs, not later than 6 months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

FSC 2935

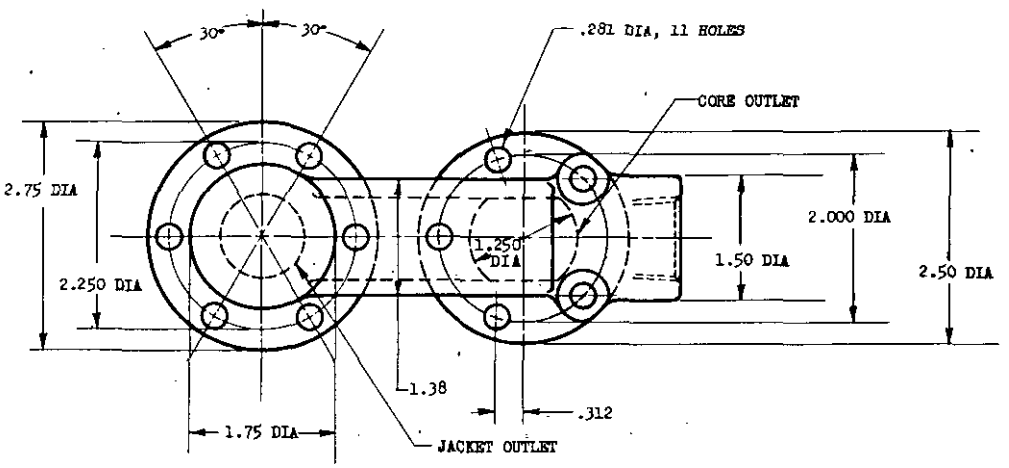

VIEW WITH HEX CAP REMOVED

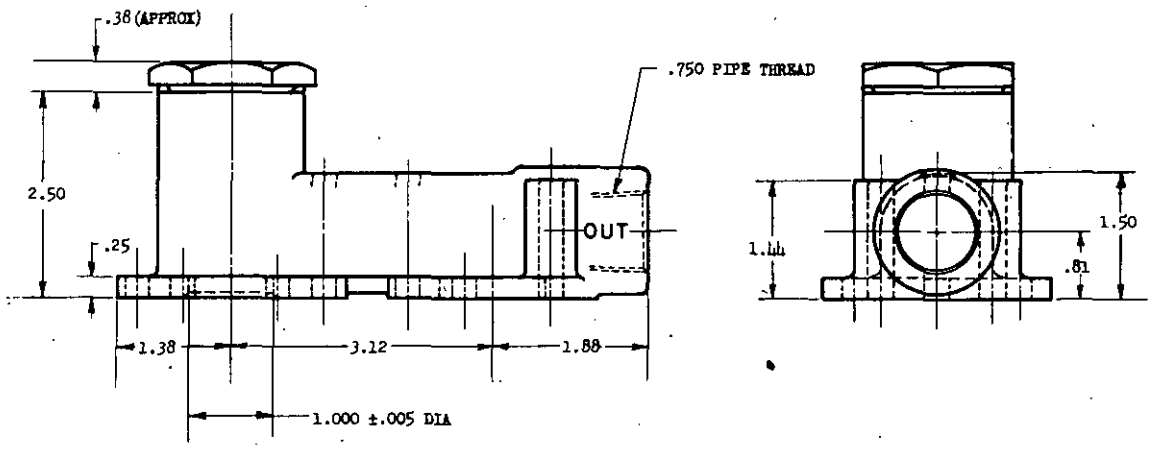

(2) **CANCELED** AFTER 18 DECEMBER 1964. NO SUPERSEDING STANDARD.

AN PART NO.
AN4105-1

INACTIVE FOR DESIGN AFTER 10 APRIL 1953. NO SUPERSEDING AN STANDARD.

THIS DRAWING IS FOR REFERENCE AND STOCK PURPOSES ONLY. MANUFACTURING DETAILS SHALL BE IN ACCORDANCE WITH ARMY-NAVY AERONAUTICAL STANDARD ISSUE OF ARMY AIR FORCES DRAWING 44B7850 AND DETAIL DRAWINGS REFERENCED THEREON.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE ON TWO PLACE DECIMALS ±.02, THREE PLACE ±.015, ANGLES ±1/2°

(1) FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES SEE ANA BULLETIN 337.

APPROVED 28 Jan 44 REVISED (1) 10 Apr 53 (2) 18 Dec 64

PROCUREMENT SPECIFICATION	ARMY-NAVY AERONAUTICAL STANDARD	AN4105
NONE	VALVE - OIL BYPASS SPRING LOADED RELIEF	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.