
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

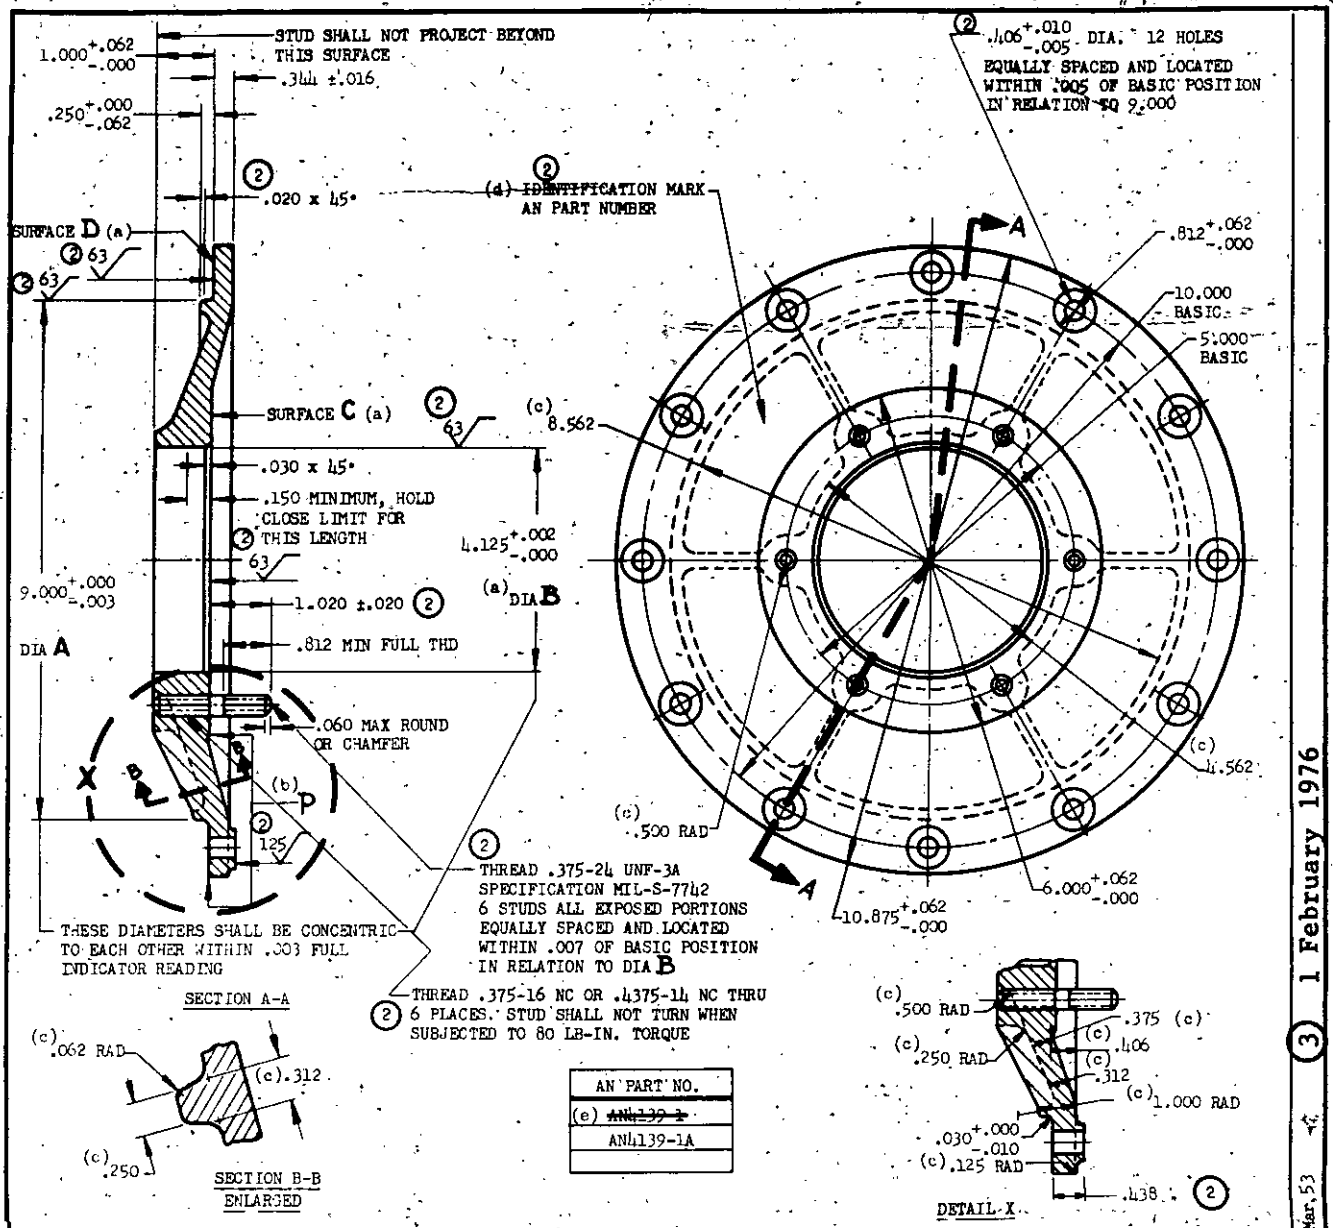

AN PART NO.
(e) ~~AN4139-1~~
AN4139-1A

(e) PREVIOUS PART NUMBER AN4139-1 INACTIVE FOR DESIGN AFTER 12 AUG 1949. AN4139-1A REPLACES AND IS INTERCHANGEABLE WITH AN4139-1. FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.
STRENGTH: 6,000 DIA MOUNTING PAD SHALL BE CAPABLE OF WITHSTANDING A MAXIMUM OVERHUNG MOMENT OF 625 LB - IN. AND A MAX ACCESSORY WEIGHT OF 75 LBS.

(a) SURFACE C SHALL BE IN THE SAME PLANE AS SURFACE D WITHIN .010. DIAMETER B SHALL BE SQUARE WITH SURFACE C (WITHIN 6.000 MINIMUM DIAMETER) WITHIN .002 FULL INDICATOR READING. SURFACES C SHALL BE PARALLEL WITHIN .002 FULL INDICATOR READING.

(2) MATERIAL: FLANGE; MAGNESIUM ALLOY; SPEC QQ-M-56 (COMPOSITION A... ...HTA); OR SPEC QQ-M-55 (COMP AZ92 TEMPER HTA) ALUMINUM ALLOY; SPEC QQ-A-601 (COMP 4... ...NO. B195), QQ-A-601 (COMP 10, NO. 355), QQ-A-696 (COMP 6, NO. 355).
STUDS; STEEL, SPEC MIL-S-6049, ROCK...

(2) FINISH: FLANGE; FOR ALUMINUM ALLOY, USE A... ...USE PROTECTIVE TREATMENT IN ACCORDANCE WITH MIL-M-3171, TYPE III...
(b) PAINT ENCLOSED AREA... ...TWO COATS OF ENGINE GRAY ENAMEL SPEC MIL-E-7729 OR... ...AND B MAY BE PAINTED WITH PRIMER AND ENAMEL OR LACQUER...
STUDS;...

(2) FOR DEFINITION O...
(2)(d) MANUFACTURER'S I... ...PEAR ON PART APPROX. AS SHOWN.
NOMINAL USE OF TH... ...XVI DRIVE TO ACCOMMODATE TYPE XII DRIVE ACCESSORIES.
REMOVE ALL BURRS A...
(2) DIMENSIONS IN INCHE... ...ECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.
(c) CASTING DIMENSIONS...
UNSPECIFIED RADII .1...
(2) SPECIFICATIONS LISTED... ...E MAY BE SUBSTITUTED BY EQUIVALENT SAE AMS SPECIFICATIONS AS PERMITTED BY ANA BULLETIN NO. 343.

(3) CANCELLED 1 February 1976 NO SUPERSEDING STANDARD

(3) 1 February 1976 | (2) 4 Mar 53 | (1) 12 Aug 49 REVISED | APPROVED 6 Jun 47

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN4139
NONE	ADAPTER - TYPE XVI DRIVE FLANGE	

THE REPUBLICAN PRESS, Hamilton, Ohio
June 19, 1957 1000

Source: https://assist.dla.mil -- Downloaded: 20261
Check the source to verify that this is the current versi