


FED. SUP CLASS 5315

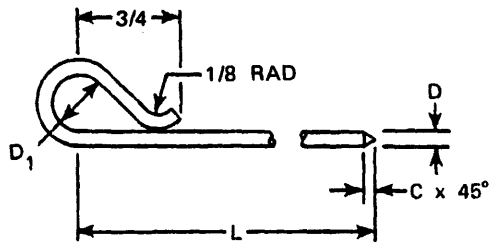


AN415-1-(X)

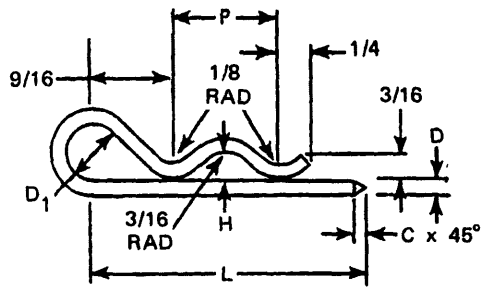


AN415-2

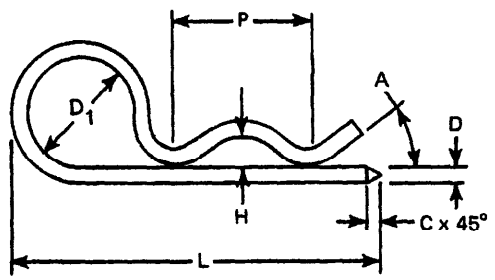


AN415-3 thru -7

TABLE I

| PART NO. | D Wire Dia. | L Length | $D_1$ Eye Dia. | H Height | P Pitch | A Angle | C x 45° Chamfer, MIN |
|---|---|---|---|---|---|---|---|
| AN415-1-(X) | .080 +.000 -.002 | See Note 5 | .375 | – | – | – | .020 |
| AN415-2 | .080 +.000 -.002 | 1.938 | .375 | .188 | .750 | – | .020 |
| AN415-3 | .0295 | 0.594 | .094 | .047 | .188 | 35° | .014 |
| AN415-4 | .0585 | 1.125 | .250 | .094 | .375 | 35° | .020 |
| AN415-5 | .0725 | 1.438 | .313 | .094 | .500 | 35° | .020 |
| AN415-6 | .0915 | 1.875 | .688 | .125 | .563 | 35° | .020 |
| AN415-7 | .1480 | 2.688 | .781 | .125 | .875 | 35° | .020 |

NOTES:

1. MATERIAL: Corrosion-resisting steel in accordance with QQ-W-423, Composition 316, Condition B.
2. CHAMFER: Chamfer as shown and remove burrs and sharp edges.
3. DIMENSIONS: All dimensions, except for angle A, in inches.
4. TOLERANCE: Unless otherwise specified, tolerance is ±1/64 (±.0156).
5. PART NUMBER: AN415-2 thru AN415-7: as listed on Table I.
   AN415-1-(X) only: second dash number indicates length L expressed in increments of one (1) inch.
   Example: AN415-1-7 is the part number for a type AN415-1 pin with length L of seven (7) inches.
   Length L available in 1, 2, 3, 4, 5, 7, 8, 10, 12, 13, 18, 19, 20, 25 or 26 inches.
6. OTHER NOTES: (a) Referenced documents shall be of the issue in effect on date of invitation for bids.
   (b) For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(2) ENTIRE STANDARD REVISED

USER ACTIVITIES: MI, MU, EL, AT, ME, PA, WV YD

REV[illegible] ACTIVITIES: WC, GL, 11, IS

APPROVED 29 September 1948 REVISED (1) 21 January 1954 (2) 16 September 1975

| P. A. OS / Other Cust AV 82 | AIR FORCE-NAVY AERONAUTICAL STANDARD | AN415 |
|---|---|---|
| | PIN, LOCK (HITCH PIN) | |
| PROCUREMENT SPECIFICATION None | SUPERSEDES: Former Air Force and Navy Standard Issues of AN405 | SHEET 1 OF 1 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.