

FED SUP CLASS
5310



TYPE A
INTERNAL TEETH

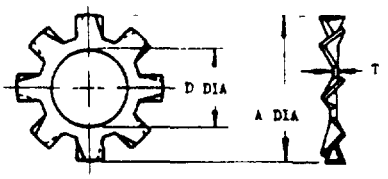

TYPE B
EXTERNAL TEETH

SIZE	DASH NO STEEL	DASH NO BRONZE	D -.000	A +.000	±.002	SIZE	DASH NO STEEL	DASH NO BRONZE	D -.000	A +.000	±.002
NO 2	A2		.089 +.006	.200 -.025	012						
NO 3	A3		102 +.007	.232 -.017	.016	NO 3	B3	B3B	.102 +.007	.230 -.010	.014
NO. 4	A4	A4B	116 + 007	.270 -.015	016	NO 4	B4	B4B	.116 +.007	.255 - 010	.016
NO. 6	A6	A6B	.142 +.008	.288 -.010	.018	NO 6	B6	B6B	.142 +.008	.317 - 011	.020
NO 8	A8	A8B	.168 +.008	.336 -.011	.020	NO. 8	B8	B8B	.168 +.008	.381 -.011	.020
NO 10	A10	A10B	195 +.009	.381 -.011	.022	NO 10	B10	B10B	.195 +.009	406 - 011	022
1/4	A416 A416H	A416B	.256 +.011 .256 +.011	.478 -.012 536 -.012	025 038	1/4	B416	B416B	.256 +.011	506 -.012	.025
5/16	A516	A516B	.320 +.012	.607 -.013	.030	5/16	B516	B516B	.320 +.012	.601 -.013	.030
3/8	A616	A616B	384 +.014	.692 -.014	036	3/8	B616	B616B	384 + 014	.695 -.035	.036
7/16	A716 (a) A716S	A716B (a) A716BS	.448 +.015 .472 + 008	.789 - 042 .607 -.014	.038 018	7/16	B716	B716B	.448 + 016	760 - 020	038
1/2	A816		512 + 017	883 -.016	.040	1/2	B816		512 +.017	900 - 020	040
9/16	A916		.576 +.018	1.000 -.043	.040	9/16	B916		576 +.018	.985 -.020	.040
5/8	A1016		.640 + 019	1.071 -.018	.045	5/8	B1016		641 +.022	1.070 -.025	.045
3/4	A1216		.769 +.026	1.245 -.025	.050	3/4	B1216		768 +.022	1.260 -.042	.050
7/8	A1416		.894 +.024	1.386 -.022	.056	7/8	B1416		.897 + 030	1.410 -.030	.056
1	A1616		1 019 +.024	1.637 -.024	.063	1	B1616		1.025 + 035	1.620 -.030	.063

(a) THIS WASHER HAS THE ALTERNATE TEETH TWISTED IN A DIRECTION OPPOSITE TO THAT OF THE OTHER TEETH

NUMBER OF TEETH MAY VARY WITH SIZE OF WASHER IN ACCORDANCE WITH COMMERCIAL PRACTICE

MATERIAL: STEEL, BRONZE, SEE PROCUREMENT SPECIFICATION.

EXAMPLE OF PART NUMBER AN936B416B = BRONZE WASHER WITH EXTERNAL TEETH, NON-COUNTERSUNK, FOR USE WITH 1/4-INCH FASTENER

USE IN CONFORMANCE WITH AND10476

DIMENSIONS IN INCHES

(T) FINISH STEEL, CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE I, CLASS 2 (WITHOUT SUPPLEMENTARY TREATMENT)
BRONZE CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE II, CLASS 2 (WITH SUPPLEMENTARY CHROMATE TREATMENT), AND DYE DEEP YELLOW IN ACCORDANCE WITH FEDERAL STANDARD NO 595, COLOR NO 23538

IN CASE OF CONFLICT, THE REQUIREMENTS SPECIFIED HEREON SHALL TAKE PRECEDENCE OVER THE REQUIREMENTS SPECIFIED IN SPECIFICATION MIL-W-6986

(T) INACTIVE FOR DESIGN AFTER 15 MAY 1970, USE MS35333, MS35335, MS35336, OR MS35790

(T) CANCELED IN PART AFTER 15 MAY 1970 ALL DASH NUMBERS CANCELED EXCEPT, DASH NUMBERS A3, A416H, B3, B3B, C2, AND C2B SEE INTERCHANGEABILITY TABLE ON MS35333, MS35335, MS35336 OR MS35790 FOR SUBSTITUTIVE PARTS

APPROVED 16 Aug 41 REVISED (1) 21 Oct 44 (2) 30 Apr 45 (3) 8 Sep 50 (4) 18 Oct 51 (5) 7 Mar 56 (6) 12 Aug 59 (7) 28 Sep 70

REVIEWER SYMBOLS
NAVY - AS USAF - 82
ARMY - WC DSA - IS

USER SYMBOLS

"Review/user information is current as of the date of this document for future coordination of changes to this document draft circulation should be based on the information in the current DODISS."


This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN936
MIL-W-6986	WASHER, TOOTH LOCK	SHEET 1 OF 2

SUPERSEDES USAF DRAWING 43 NAF DRAWING 1 [illegible], AN AERO STANDARD 215367


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5310

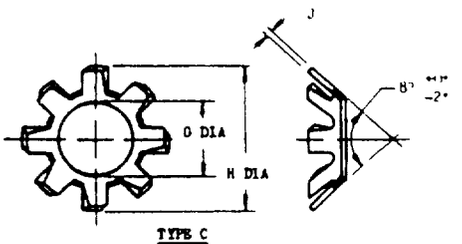

TYPE C

(b) 82° COUNTERSUNK EXTERNAL TEETH

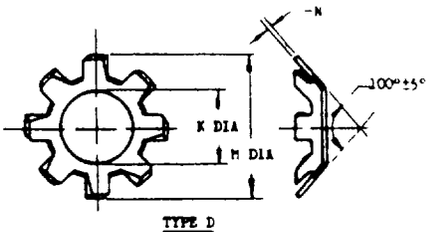

TYPE D

(c) 100° COUNTERSUNK EXTERNAL TEETH

SIZE	DASH NO		G	H	J	SIZE	DASH NO		K	M	N
	STEEL	BRONZE	- 000	+ 000	± 002		STEEL		-.000	+ 000	±.002
NO. 2	C2	C2B	089 +.006	183 -.013	008	NO. 2	D2		089 +.006	190 -.01[illegible]	008
NO 4	C4	C4B	116 + 00	232 - 014	016	NO 4	D4		116 +.007	.241 - 014	016
NO. 6	C6	C6B	.142 +.008	.300 -.015	018	NO 6	D6		142 +.008	287 -.01[illegible]	012
						NO. 8	D8		.168 +.008	.340 -.016	.016
NO. 8	C8	C8B	.168 +.008	.353 -.016	.018	NO. 10	D10		.195 +.009	.394 -.017	.018
NO. 10	C10	C10B	.195 +.009	.370 - 017	.022						
1/4	C416	C416B	.256 +.011	.478 -.020	.022						
5/16	C516	C516B	320 + 012	625 -.022	.025						
3/8	C616	C616B	.384 +.014	.801 -.025	030						
7/16	C716	C716B	448 + 015	890 - 027	036						

(b) FOR USE WITH 82° COUNTERSUNK HEAD SCREWS ONLY

(c) FOR USE WITH 100° COUNTERSUNK HEAD SCREWS ONLY

APPROVED 16 Aug 41 REVISED (7) FOR CHANGES SEE SHEET 1

USER SYMBOLS
REVIEWER SYMBOLS
NAVY - AS USAF - 82
ARMY - MC DSA - IS

"Review/user information is current as of the date of this document For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN 936
MIL-W-6986	WASHER, TOOTH LOCK	SHEET 2

SUPERSEDES USAF DRAWING 936, NAF DRAWING 1058, AN AERO STANDARD 215367

☆ U S GOVERNMENT PRINTING OFFICE 1970 433-691 2064

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.