A-A-1351
January 14, 1980

COMMERCIAL ITEM DESCRIPTION

WRENCH, OPEN END, THIN DOUBLE HEAD

The General Services Administration has authorized the use of this commercial item description in lieu of Federal Specification GGG-W-636.


This commercial item description covers wrenches suitable for hexagonal and square-headed bolts and nuts, assigned National Stock Numbers (NSN's) as listed below.

Salient Characteristics:

Material: Steel, Rockwell C hardness of 40 minimum, 55 maximum.
Finish: Chromium plated. Both faces of each head shall have a maximum roughness height value of 30 microinches (A.A.).
Marking: Marked in a plain and permanent manner with wrench opening size on the face or on the handle as close to the heads as practicable and with manufacturer's name or trademark.
Offset: 3/16 inch.
Angle: 15 degrees.
Wrench openings: Sized to pass the gaging requirements of Federal Standard 346.
Chamfer: Tips chamfered or rounded to eliminate burrs.

National Stock Number (NSN)	Wrench opening (distance across flats)		A	B	C	D	Torque Load (min)	
	Small head	Large head	Overall length ± 3/8	Radius (max)	Width (max)	Thickness +.032 -.016	Small end	Large end
	Inches	Inches	Inches	Inches	Inch	Inch	Inch-lbs	Inch-lbs
5120-00-184-8552	11/32	3/8	5	13/32	3/8	1/8	82	72
5120-00-184-8553	7/16	1/2	5-1/2	1/2	3/8	1/8	121	94
5120-00-184-8555	9/16	5/8	6	19/32	3/8	1/8	150	120
5120-00-184-8557	11/16	3/4	6-1/2	11/16	7/16	1/8	239	198
5120-00-184-8559	13/16	7/8	7	49/64	7/16	1/8	262	219
5120-00-184-8560	15/16	1	7-1/2	27/32	1/2	1/8	292	239
5120-00-184-8561	1-1/16	1-1/8	8	15/16	1/2	3/16	503	425
5120-00-555-9367	1-3/16	1-1/4	8-1/2	1-1/32	5/8	3/16	581	500
5120-00-184-8563	1-5/16	1-3/8	9	1-1/8	5/8	3/16	669	581
5120-00-184-8564	1-7/16	1-1/2	9-1/2	1-7/32	3/4	3/16	762	666
5120-00-184-8565	1-9/16	1-5/8	10	1-21/64	3/4	3/16	912	806
5120-00-184-8566	1-11/16	1-3/4	10-1/2	1-7/16	3/4	3/16	1,072	981
5120-00-955-9368	1-13/16	1-7/8	11	1-17/32	3/4	3/16	1,190	1,072
5120-00-184-8568	1-15/16	2	11-1/2	1-5/8	3/4	3/16	1,312	1,184
5120-00-184-8569	2-1/16	2-1/8	12	1-3/4	7/8	1/4	2,100	1,921
5120-00-555-9485	2-3/16	2-1/4	12-1/2	1-29/32	7/8	1/4	2,679	2,475
5120-00-184-8571	2-5/16	2-3/8	13	2	1	1/4	2,900	2,679
5120-00-184-8572	2-7/16	2-1/2	13-1/2	2-3/32	1	1/4	3,117	2,892
5120-00-184-8573	2-9/16	2-5/8	14	2-3/16	1-1/8	1/4	3,346	3,108
5120-00-184-8575	2-11/16	2-3/4	14-1/2	2-1/4	1-1/8	3/8	5,031	4,656
5120-00-184-8576	2-13/16	2-7/8	15	2-13/32	1-1/8	3/8	6,100	6,656
5120-00-184-8578	3-1/8	3-1/4	16	2-11/16	1-1/4	3/8	7,712	6,775
5120-00-555-9494	3-1/2	3-5/8	16-1/2	2-15/16	1-3/8	3/8	8,631	7,712

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

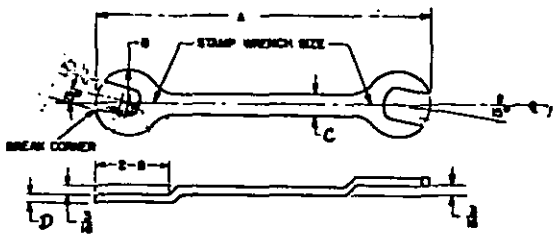

Wrench, open end

Workmanship. Wrench shall be free from rust, burrs, fins, nodules, and other defects which may impair serviceability, durability, or appearance. The edges and corners of the wrench shall be clearly defined and smoothly finished.

The issue of Federal Standard 346 in effect on the date of the solicitation shall be used to determine compliance with stated requirements.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.

Preservation, packaging, packing and marking. Each wrench shall be preserved and packaged in accordance with normal commercial practice and packed to assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling, and storage. The shipping container shall be in compliance with the National Motor Freight Classification and Uniform Freight Classification. Marking shall be as specified in the contract or order.

Federal Standards are available from the General Services Administration, Specification Sales, Building 197 (Washington Navy Yard) Washington, DC 20407.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.