A-A-1360
January 14, 1980

COMMERCIAL ITEM DESCRIPTION

WRENCH, STRIKING, BOX 12-POINT

The General Services Administration has authorized the use of this commercial item description in lieu of Federal Specification GGG-W-636.

This commercial item description covers wrenches suitable for hexagonal boltheads and nuts, assigned National Stock Numbers (NSN's) as listed below.


Salient characteristics:

Material:	Steel, Rockwell C hardness of 35 minimum, 45 maximum.
Finish:	Enamel, oxide, phosphate, or zinc coating. Flash forge shall be removed to the extent that it shall blend with adjacent surface in keeping with good commercial practice.
Marking:	Marked in a plain and permanent manner with wrench opening size on the faces or on the handle as close to the head as practicable and with manufacturer's name or trademark.
Wrench ends:	One end shall have a box opening having 12 points (double hexagon). Other end shall have a striking block having a rectangular cross section.
Handle:	Offset with the longitudinal centerline at an angle of 5° (plus or minus 5°) from the plane of the wrench head.
Engaging surfaces:	Finished in a smooth and well-defined manner and the corners of the serrations sharp.
Wrench openings:	Sized to pass the gaging requirements of Federal Standard 346.

National Stock Number	Wrench opening (distance across flats) A	Head		Striking block			Diameter of handle (min.) E	Overall length (min.) F	Radius of offset (min.) H
		Outside diameter (min.) B	Thickness (min.) C	Width (min.) D	Thickness (min.) J	Length (min.) G			
	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches
5120-00-277-1610	1-1/16	1-19/32	9/16	1	7/8	1-3/4	11/16	8-1/2	15/16
5120-00-277-1611	1-1/8	1-19/32	9/16	1	7/8	1-3/4	11/16	8-1/2	15/16
5120-00-277-1562	1-1/4	1-7/8	11/16	1-1/8	7/8	1-3/4	3/4	10-1/2	1-1/16
5120-00-277-1563	1-5/16	1-7/8	11/16	1-1/8	1-1/8	1-3/4	3/4	10-1/2	1-1/8
5120-00-277-1564	1-7/16	2-1/8	7/8	1-1/4	1-1/8	1-3/4	7/8	11-1/2	1-1/4
5120-00-277-1565	1-1/2	2-3/16	7/8	1-1/4	1-1/8	1-3/4	7/8	11-1/2	1-1/4
5120-00-277-1566	1-5/8	2-13/32	1	1-1/4	1-1/8	1-3/4	1	12	1-3/8
5120-00-277-1567	1-11/16	2-13/32	1	1-1/4	1-1/4	2	1	12	1-7/16
5120-00-277-1568	1-13/16	2-21/32	1-1/16	1-1/2	1-1/4	2	1	12-1/2	1-1/2
5120-00-277-1569	1-7/8	2-3/4	1-1/8	1/1/2	1-1/4	2	1,	12-1/2	1-5/8
5120-00-277-1571	2-3/16	3-1/8	1-5/16	1-5/8	1-1/4	2	1	13-1/2	1-7/8
5120-00-277-1572	2-1/4	3-1/4	1-5/16	1-5/8	1-1/4	2	1	13-1/2	1-7/8
5120-00-277-1573	2-3/8	3-3/8	1-3/8	1-11/16	1-1/4	2-1/2	1-1/8	13-1/2	1-15/16
5120-00-277-1574	2-9/16	3-5/8	1-3/8	1-11/16	1-1/4	2-1/2	1-1/8	13-1/2	2-1/4
5120-00-277-1575	2-5/8	3-11/16	1-3/8	1-11/16	1-1/4	2-1/2	1-1/8	13-1/2	2-1/4
5120-00-277-1576	2-3/4	3-7/8	1-3/8	1-11/16	1-1/4	2-1/2	1-1/8	13-1/2	2-1/4
5120-00-277-1577	2-15/16	4-5/32	1-11/18	1-3/4	1-1/4	2-1/2	1-1/8	15	2-3/8
5120-00-277-1578	3	4-1/4	1-3/4	1-3/4	1-1/4	2-1/2	1-1/8	15	2-5/8
5120-00-277-1579	3-1/8	4-3/8	1-3/4	1-3/4	1-1/4	2-1/2	1-1/8	15	2-5/8

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:13Z
Check the source to verify that this is the currentversion before use.

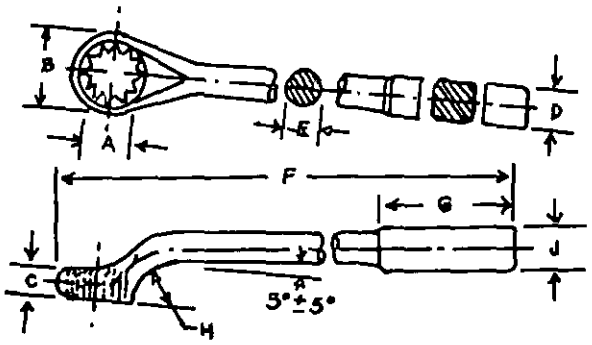

Workmanship. Wrench shall be free from rust, burrs, fins, nodules, and other defects which may impair serviceability, durability, or appearance. The edges and corners of the wrench shall be clearly defined and smoothly finished with no evidence of broaching tears on the working surface.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.

Preservation, packaging, packing, and marking. Each wrench shall be preserved and packaged in accordance with normal commercial practice and packed to assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling, and storage. The shipping container shall be in compliance with the National Motor Freight Classification and Uniform Freight Classification. Marking shall be as specified in the contract or order.

The issue of Federal Standard 346 in effect on the date of the solicitation shall be used to determine compliance with stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.