INCH POUND

MIL-B-4792E(USAF)
11 JANUARY 1994
Superseding
MIL-B-792D(USAF)
1 June 1972

MILITARY SPECIFICATION

BUMPER, RUBBER, DUPLEX ROUND

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a duplex round rubber bumper.

2. APPLICABLE DOCUMENTS

*2.1 Issues of Documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of the specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-116	Preservation, Methods of
MIL-R-6130	Rubber, Cellular, Chemically Blown
MIL-C-10799	Cloth, Coated, Cotton, Vinyl Coated, Fire and Mildew Resistant

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: The Resources and Logistics Services Division, SA-ALC/TILDD, Bldg. 171, Post C-12, 485 Quentin Roosevelt Rd., Kelly AFB, TX 78241-6524, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5340

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:48Z
Check the source to verify that this is the current version before use.

FEDERAL

PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-636	Box, Fiberboard
PPP-T-60	Tape, Pressure-Sensitive Adhesive; Waterproof, for Packaging

STANDARDS

FEDERAL

FED-STD-595	Colors used in Government Procurement

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of US Military Property
MIL-STD-970	Standards and Specifications Order of Precedence for the Selection of
MIL-STD-2073-1	DOD Material Procedures for developing & Application of Packaging Requirements
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods

*(Unless otherwise indicated, copies of the federal and military specifications and standards are available from the Standardization Documents Order Desk, Building 4D, 700 Robins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government Publications. The following document forms a part of this document to the extend specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issues of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited the solicitation.

OFFICIAL CLASSIFICATION COMMITTEE

UNIFORM FREIGHT CLASSIFICATION RULES

*(Application for copies should be addressed to the Official Classification Committee, Room 202, Union Station, 516 West Jackson Blvd., Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-2073-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:48Z
Check the source to verify that this is the current version before use.

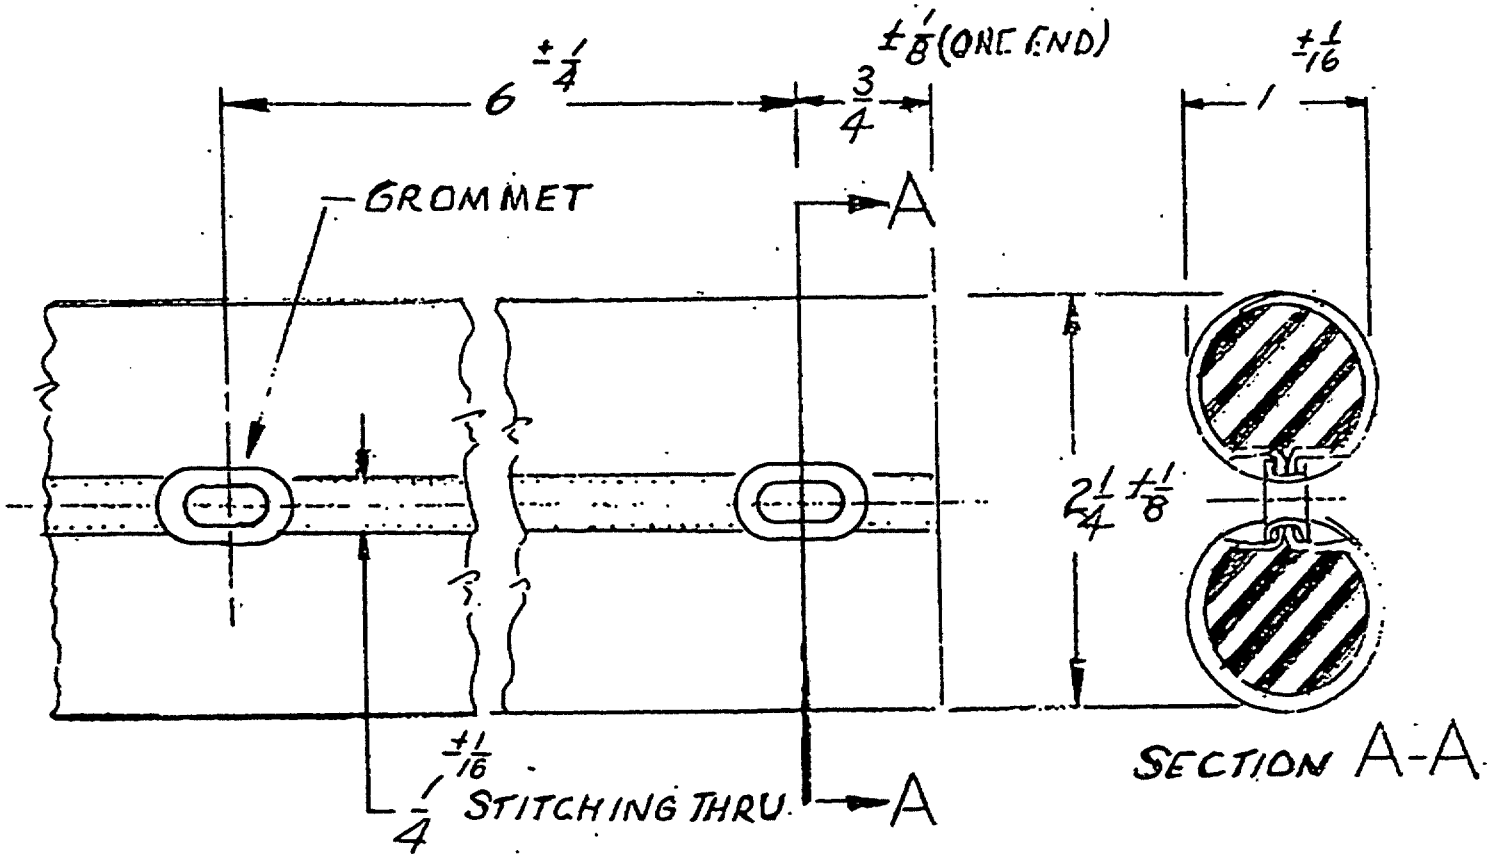


Figure 1 - Bumper

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:48Z
Check the source to verify that this is the current version before use.

3.2 Materials. All materials used in the construction of the bumper shall be new and unused.

*3.3 Design and construction. The bumper shall be constructed of two cellular, sponge rubber cores completely covered on their curved surfaces with a woven cotton fabric coated as specified herein. The woven cotton fabric surrounding the rubber cores may be permanently bonded to the cores of vulcanizing at the time of manufacture or, if not, the fabric shall be sewn snugly around the rubber cores. The rubber cores shall be in the cured condition after final processing of the bumper. The bumper shall conform to Figure 1 in its final condition ready for shipment.

*3.3.1 Cores. The cores shall be of cellular rubber conforming to MIL-R-1630, type I or type II, grade A, condition medium.

3.3.2 Fabric. The fabric material shall conform to MIL-C-10799, type II, class 4, Table I. The coated color shall be green, color 24052, conforming to MIL-C-83286 or MIL-I-85285.

*3.3.3 Stitching. The fabric cover shall be secured at the center by two rows of stitching with thread conforming to size.

The stitching shall be as shown on Figure 1 and shall have 4 to 8 stitches per inch.

3.3.4 Grommets. At intervals of 6 ±1/4 inch, the bumper shall have l/2 by 3/4 inch oblong brass grommets across the flange and a l/4 by 7/16 inch opening after installation. The formed flange shall be on the seam side of the bumper. The flange shall be securely formed without a washer.

3.4 Length. Unless otherwise specified (see 6.2), the bumper shall be furnished in 100 ±l/2 foot lengths.

3.5 Identification of product. Each 100 foot length of bumper shall be marked for identification in accordance with MIL-STD-130.

3.6 Workmanship. The bumper shall be fabricated and finished in a workmanship manner. Particular attention shall be given to freedom from blemishes and defects, vulcanizing and stitching, et cetera.

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:48Z
Check the source to verify that this is the current version before use.

4.2 Classification of tests. The inspection and testing of the bumper shall be classified as acceptance tests.

4.3 Acceptance tests. Acceptance tests shall consist of the test described in 4.4.1.

4.4 Test Methods.

4.4.1 Examination of product. The bumper shall be inspected to determine compliance with this specification with respect to material, stitching, vulcanizing, dimensions, and workmanship.

*4.5 Inspection of preservation, packaging, packing and marking for shipment and storage. Sample items or packs and the inspection of the preservation, packaging, packing and marking for shipment and storage shall be in accordance with the requirements of Section 5, or the documents specified therein.

5. PREPARATION FOR DELIVERY

*5.1 Preservation and packaging. Preservation and packaging shall be Level A or C, as specified (see 6.2).

*5.1.1 Level A.

*5.1.1.1 Cleaning and drying. The bumper shall be cleaned in accordance with C-1 and dried with procedure D-1 and D-4 of MIL-P-116.

*5.1.1.2 Unit packaging. The bumper shall be packaged in accordance with Methods IC of MIL-P-116. The outer container shall be a fiberboard box

conforming to PPP-B-636, style RSC, class overseas. The box shall be sealed with tape conforming to PPP-T-60, or equal.

*5.1.2 Level C. Each bumper shall be packaged to afford protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The level may conform to the supplier's commercial practice when it meets the requirements of this level.

*5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

*5.2.1 Level A. The bumpers, packaged as specified in 5.1, shall be packed for shipment in shipping containers conforming to PPP-B-601, overseas type, style A or B. Closure and strapping shall be in accordance with the appendix to the container specification.

*5.2.2. Level B. Level B packing shall be the same as Level A except the shipping container shall conform to PPP-B-601, domestic type, style A or B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:48Z
Check the source to verify that this is the current version before use.

*5.2.3 Level C. The bumpers, packaged as specified in 5.1, shall be packed to insure carrier acceptance and safe delivery at destination. Containers shall conform to the Uniform Freight Classification Rules or regulations of the other carriers as applicable to the mode of transportation. This may conform to the supplier's commercial practice when such meets the requirements of this level.

*5.3 Physical Protection. Interior cushioning, anchoring, blocking or bracing shall be in accordance with MIL-STD-1186.

*5.4 Marking. In addition to any special marking required by the contract or order, unit packages and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The bumper is intended to be installed on maintenance stands to protect aircraft, from damage incurred in bringing such maintenance stands into use. The bumper may be fastened through grommets to the article by means of rivets, screws, nails or other methods.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. If bumper is to be furnished in other than 100-foot lengths (see 3.4).

c. Applicable level of preservation, packaging, and packing (see 5.1 and 5.2).

*6.3 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assume no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.4 Reclaimed materials. The use of reclaimed materials shall be encouraged to the maximum extent possible.

6.5 Subject term (key word) listing.

Cores
Fabric
Stitching
Grommets

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:48Z
Check the source to verify that this is the current version before use.

Custodian:
Air Force - 99

Preparing Activity:
Air Force - 82

(Project No. 5340-F022)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE *(YYMMDD)*
3. DOCUMENT TITLE		

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME SA-ALC/TILDD	b. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON
c. ADDRESS *(Include Zip Code)* 485 Quentin Roosevelt Rd Kelly AFB TX 78241	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2021-07-30T04:48Z
Check the source to verify that this is the current version before use.