FED. SUP CLASS
5340

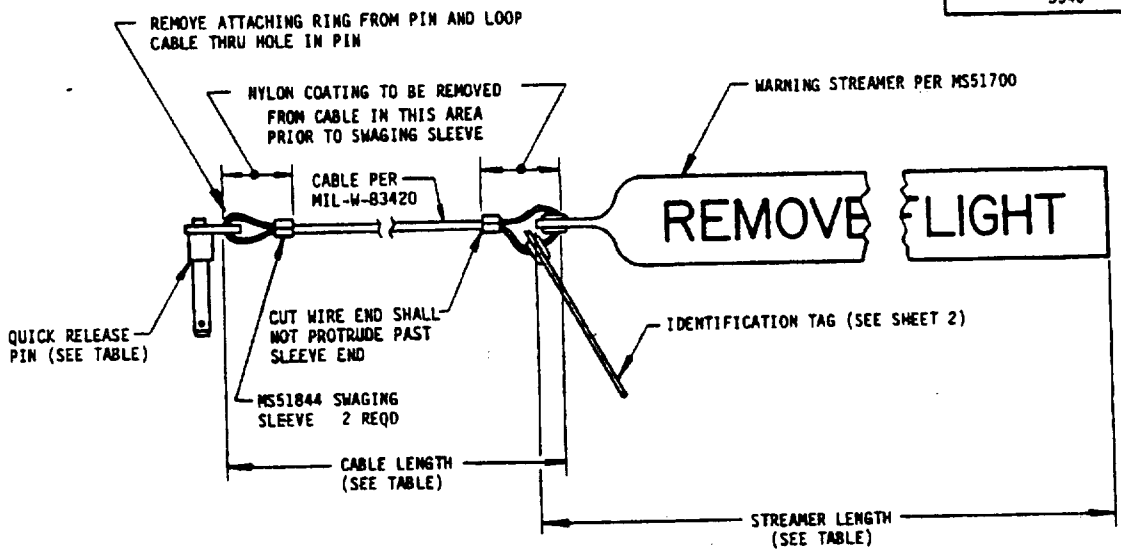


TABLE I. DASH NUMBERS

QUICK RELEASE PIN								CABLE LENGTH		STREAMER LENGTH		IDENTIFICATION TAG	
PIN TYPE		MATERIAL		SHANK DIA		GRIP LENGTH							
*		*		*	(a)	*	(b) (c)	*	±.25	*	(d)	*	
1	MS17984	S	ALLOY STEEL	3	3/16	03	0.3	1	3.00	1	MS51700-12	1	WITH TAG
				4	1/4	↑	↑	2	6.00	2	MS51700-24	2	WITHOUT TAG
2	MS17985	C	CRES	5	5/16			3	9.00	3	MS51700-36		
3	MS17986			6	3/8			4	12.00	4	MS51700-48		
4	MS17987			7	7/16			5	18.00	5	MS51700-60		
5	MS17988			8	1/2	THRU	THRU	6	24.00				
6	MS17989			9	9/16			7	30.00				
				10	5/8			8	NO CABLE				
7	MS17990			12	3/4								
				14	7/8								
				16	1	99	9.9						

* THESE LETTERS AND NUMBERS USED TO DEVELOP PART NUMBER

(a) SHANK DIA IN ONE SIXTEENTH INCH INCREMENTS
(b) GRIP LENGTH IN ONE TENTH INCH INCREMENTS
(c) CHECK WITH APPLICABLE PIN MILITARY STANDARD FOR AVAILABILITY
(d) STREAMER LENGTH IN ONE FOOT INCREMENTS
(e) WHEN ATTACHING STREAMER AND/OR IDENTIFICATION TAG DIRECTLY TO THE PIN, SPECIFY DASH NUMBER 8-NO CABLE (SEE CABLE LENGTH IN TABLE I) AND ATTACHING RING VS "S" LINK ON PIN TYPE CALLOUT.

USER SYMBOLS:
ARMY - GL

REVIEWER SYMBOLS:
NAVY - AS
USAF - 82
ARMY - AV, AR,
DLA - IS, DP

"Business/user information to current as of the date of this document. For future coordination of changes to this document, draft standards should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED. This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for requisitions now shall be made from this document.

AMSC N/A

APPROVED 18 JAN 88 REVISED

P.A. NAVY — AS Other Cust ARMY - AV USAF - 99	TITLE PIN, QUICK RELEASE WITH WARNING STREAMER ASSEMBLY	MILITARY STANDARD MS14531
PROCUREMENT SPECIFICATION MIL-P-23460	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 5340-1843

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:45Z
Check the source to verify that this is the current version before use.


USER SYMBOLS:
ARMY - GL

REVIEWER SYMBOLS:
NAVY - AS
USAF - 82
ARMY - AV, AR,
DLA - IS, OP

"Review your information to correct as of the date of this document.
For future coordination of change to this document, draft deviation
should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.
This military standard is approved for use by all Departments &
Agencies of the Department of Defense. Deviation for all new
engineering and design applications and for repetitive use shall be
made from this document.

FED. SUP CLASS
5340

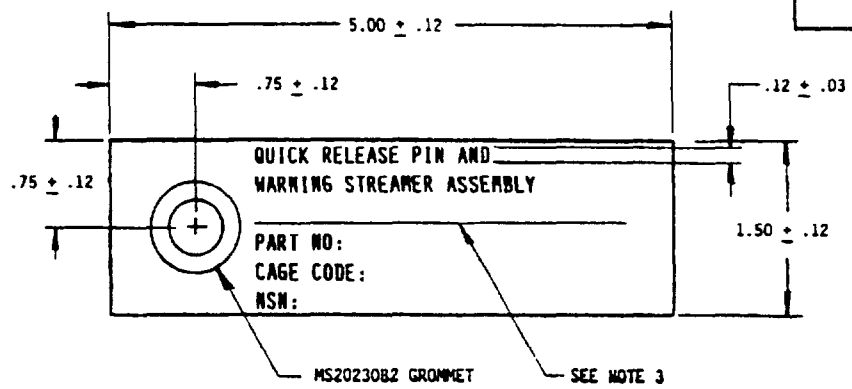

IDENTIFICATION TAG

REQUIREMENTS:

STREAMER: IN ACCORDANCE WITH MS51700. LEGEND BOTH SIDES TO BE "REMOVE PIN BEFORE FLIGHT".

IDENTIFICATION TAG:

MATERIAL: CLOTH, NYLON, COATED IN ACCORDANCE WITH MIL-C-20696, TYPE I, CLASS 3.

COLOR: CLOTH - RED, COLOR NO. 11136 OF FED-STD-595


LETTERS - WHITE, COLOR NO. 37875 OF FED-STD-595

MARKING: IDENTIFICATION MARKING TO BE IN ACCORDANCE WITH MIL-STD-130

CABLE:

MATERIAL: ROPE, WIRE, 0.0625 INCH DIA, 7 X 7 CONSTRUCTION, NYLON COATED IN ACCORDANCE WITH MIL-W-83420, TYPE II. USE COMPOSITION A WITH ALLOY STEEL PINS; USE COMPOSITION B WITH CRES PINS.

LOOP DIMENSIONS: RECOMMENDED LOOP DIMENSIONS FOR 0.0625 (1/16 INCH) DIA CABLE ARE 2.25 X 1.12. SEE EXAMPLE:



SWAGING SLEEVES: IN ACCORDANCE WITH MS51844. USE MS51844-22 WITH COMPOSITION A WIRE ROPE AND MS51844-62 WITH COMPOSITION B WIRE ROPE.

PROOF LOAD TEST: STREAMER ASSEMBLY SHALL WITHSTAND A 100 LBS TENSILE LOAD WHEN PULLED BETWEEN LOOP END AND END OF STREAMER. SWAGED CABLE ENDS SHALL WITHSTAND 100 LB TENSILE LOAD WHEN CABLE IS PULLED.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. STENCILLED LETTERS SHALL NOT CHIP OR FLAKE UNDER NORMAL USAGE.
3. SPACE FOR USING ACTIVITY TO ANNOTATE AIRCRAFT AND SYSTEM, E.G. "F-18 CANOPY" OR "F-16 EJECTION SEAT".
4. EXAMPLE OF PART NUMBER:

MS 14531 - 2 C 4 06 4 1 1= MS17985 CRES PIN, .250 DIA, .6 GRIP WITH 12.00 CABLE AND 12.00 STREAMER, WITH TAG.

- "1" INDICATES WITH IDENTIFICATION TAG
- "2" INDICATES WITHOUT IDENTIFICATION TAG
- STREAMER LENGTH
- CABLE LENGTH
- GRIP LENGTH OF PIN IN TENTHS OF AN INCH
- DIA OF PIN IN SIXTEENTHS OF AN INCH
- "S" INDICATES ALLOY STEEL PIN; "C" INDICATES CRES PIN
- TYPE OF QUICK RELEASE PIN
- BASIC MILITARY STANDARD NO.

APPROVED 18 JAN 88 REVISED

P.A. NAVY — AS Other Cust ARMY - AV USAF - 99	TITLE: PIN, QUICK RELEASE WITH WARNING STREAMER ASSEMBLY	MILITARY STANDARD MS 14531
PROCUREMENT SPECIFICATION MIL-P-23460	SUPERSEDES:	SHEET 2 OF 2

AMSC N/A

DD FORM 1 MAR 72 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 5340-1843

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:45Z
Check the source to verify that this is the current version before use.