
REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-28748

THIS SPECIFICATION APPROVED FOR USE BY all Departments and Agencies of the Departments of Defense

Form Approved
OMB No. 0 04 0188

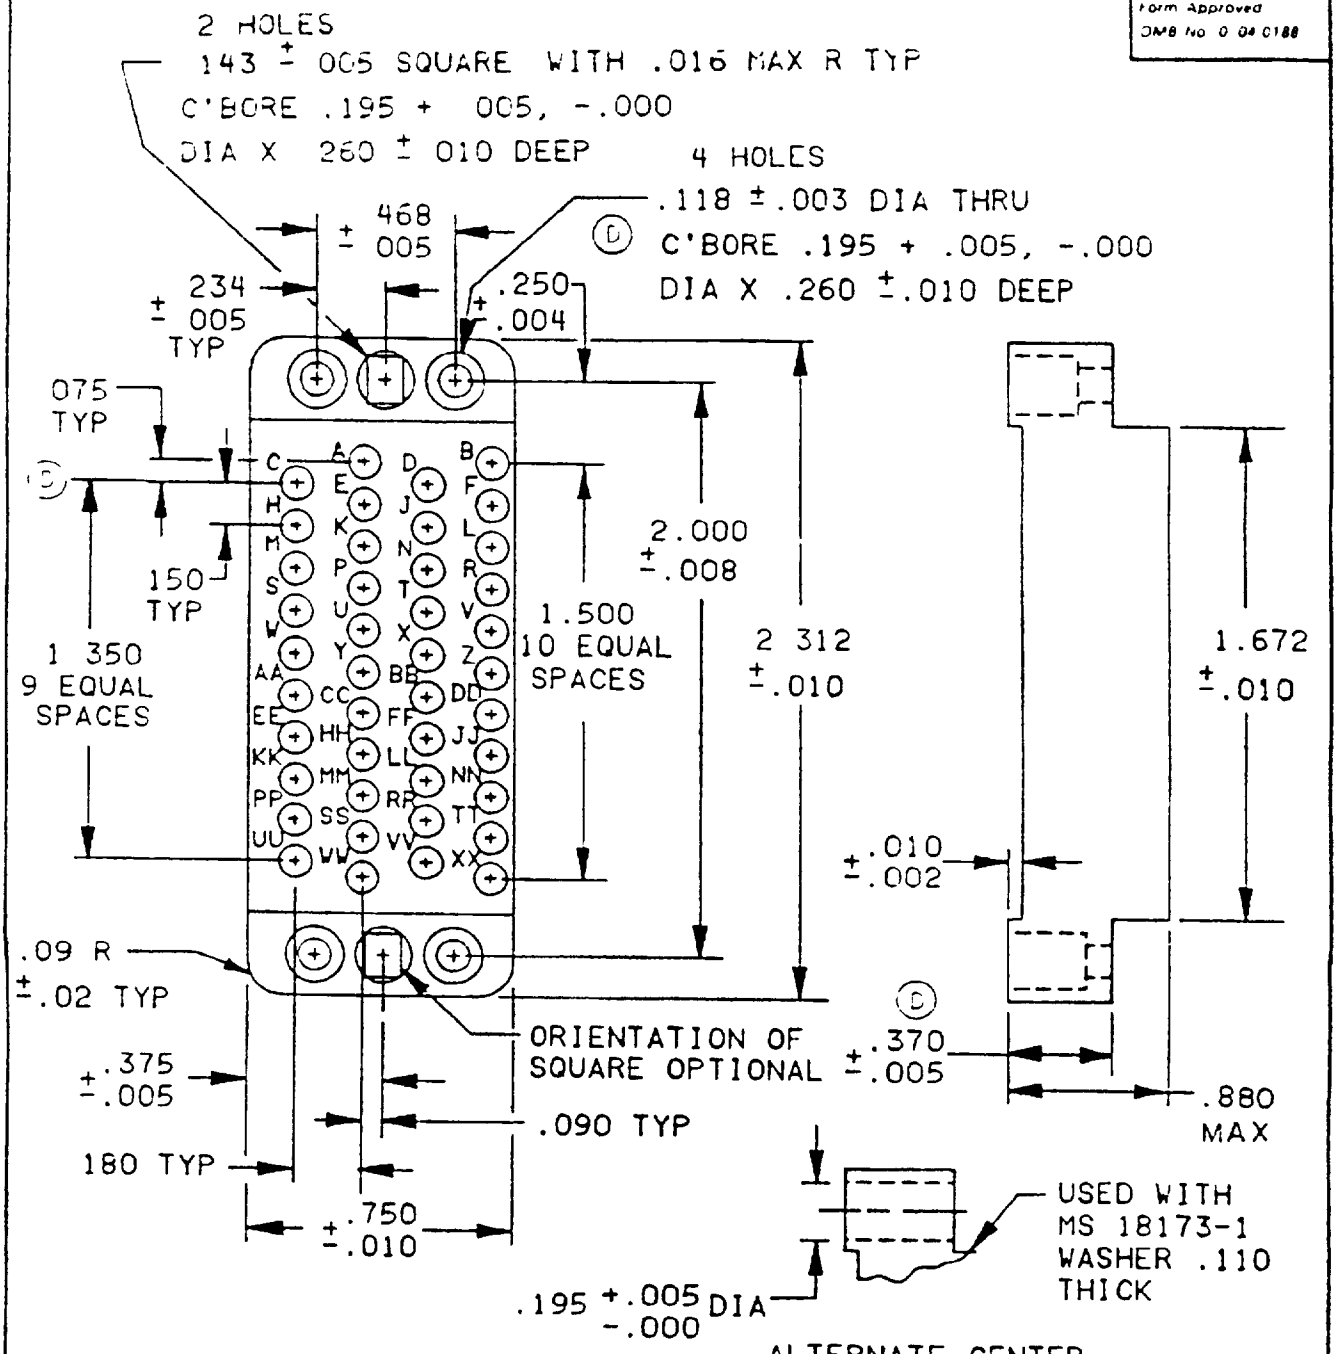

ALTERNATE CENTER HOLE CONSTRUCTIONS

DESIGN STANDARD FOR USE WITH MIL-C-28748/4.

MS Part No. MS18181-1 - Suitable for all applications
MS Part No MS18181-2 - For long jackscrews and hood only (thru hole alternate construction)

(D) denotes changes

PREPARING ACTIVITY EC CUSTODIANS ARMY CR NAVY EC AIR FORCE 85 DLA Review Army - MI, AT, Navy - AS, SH, AF - 11, DLA - ES User Army - AM, AR, ME, Navy - MI, OS PROJECT NUMBER 5935-1794	MILITARY SPECIFICATION SHEET TITLE Insert (Insulator), Rectangular Connector, Electrical, 42 (Size 16 and 20 Crimp Removable Socket Contacts)	SPECIFICATION SHEET NUMBER MS18181D 27 Nov 90 SUPERSEDING MS18181C 18 March 1985 AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited		Page 1 of 2

DD Form 672 MAY 88 Previous editions are obsolete

Source: https://assist.dla.mil - Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DOCUMENT SPECIFIED IN THE SOLICITATION MIL-C-28748

THE SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

Form Approved
OMB No 0704-0188

Inches	mm
.002	0.05
.003	0.08
.004	0.10
.005	0.13
.010	0.25
.016	0.41
.02	0.51
.075	1.91
.090	2.29
.110	2.79
.118	3.00
.143	3.63
.150	3.81
.180	4.57
.195	4.95
.234	5.94
.250	6.35
.260	6.60
.370	9.40
.375	9.53
.468	11.13
.51	12.95
.750	19.05
.856	21.74
1.350	34.29
1.500	38.10
1.672	42.47
2.000	50.80
2.290	58.17
2.312	58.72

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.015 (0.38 mm).
4. Tolerance between any two adjacent contact centers shall be ±.004 (0.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (0.15 mm).
5. Contact identification may be located on either side of the hole but shall appear on the front and rear of each insert.
6. For design feature purposes, this standard takes precedence of acquisition documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitation for bid.
8. Designed for use with MIL-C-39029/35 contacts
9. Contact hole details shall be in accordance with MIL-C-28748.
10. The maximum insertion and withdrawal force (connector assembly) shall be 52.5 pounds.
11. Insert material shall be in accordance with MIL-C-28748.

PREPARING ACTIVITY	MILITARY SPECIFICATION SHEET	SPECIFICATION SHEET NUMBER
CUSTODIANS ARMY CR NAVY EC AIR FORCE 85 DLA Review Army - MI, AT, Navy - AS, SH, AF - 11, DLA - ES User Army - AM, AR, ME, Navy - MC, OS PROJECT NUMBER 5935-3794	TITLE Insert (Insulator), Rectangular (Connector, Electrical, 42 (Size 16 and 20 Crimp Removable Socket (Contacts)	MS18181D 27 Nov 90 SUPERSEDING MS18181C 18 March 1985 AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited		Page 2 of 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.