
FED SUP CLASS
5935

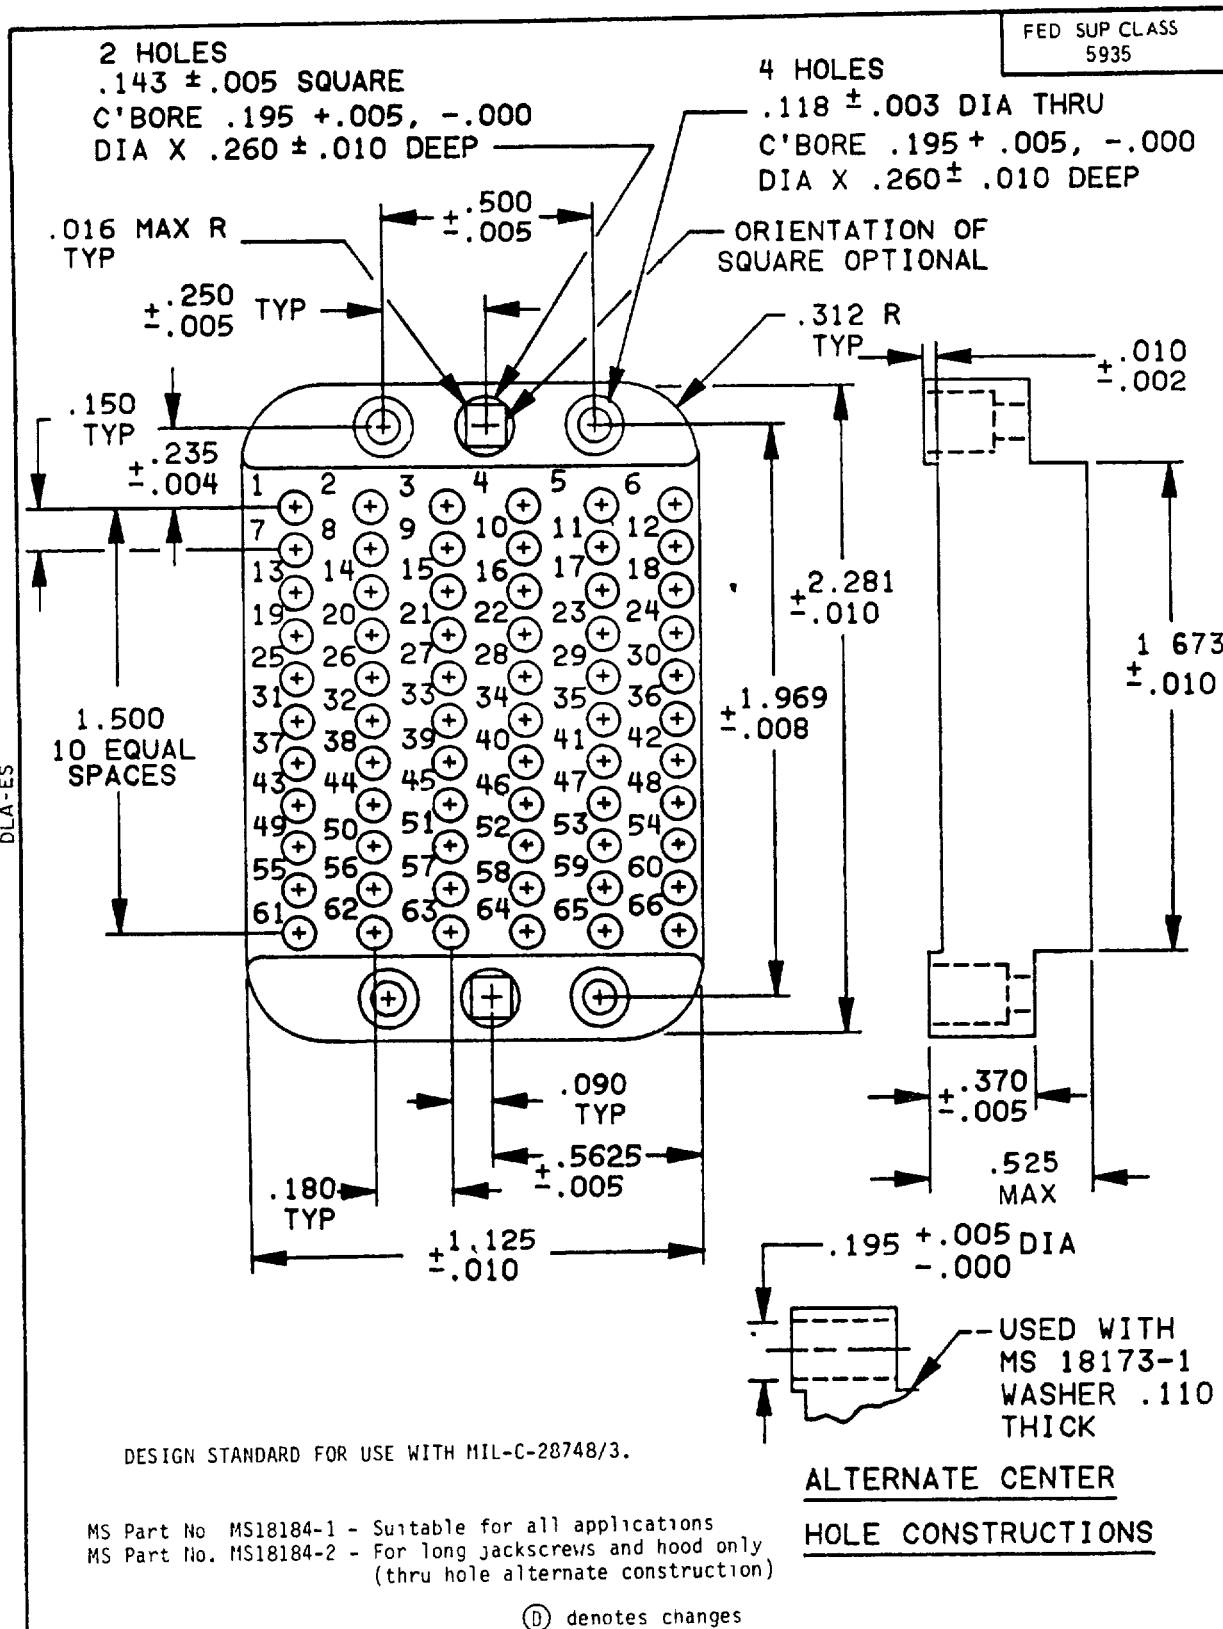

DESIGN STANDARD FOR USE WITH MIL-C-28748/3.

MS Part No MS18184-1 - Suitable for all applications
MS Part No. MS18184-2 - For long jackscrews and hood only (thru hole alternate construction)

ALTERNATE CENTER HOLE CONSTRUCTIONS

Ⓓ denotes changes

APPROVED 20 December 1965 REVISED Ⓓ 18 March 1985

Preparing activity: Navy - EC
Other Cognizance: AF-85
Army - CR

International interest

TITLE
Insert (insulator), rectangular connector, electrical, 66 (size 16 and 20 crimp removable) pin contacts

MILITARY STANDARD
MS18184

Procurement Specification
MIL-C-28748

SUPERSEDES

PAGE 1 OF 2

DD FORM 1 MAY 72 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3480-15

User activities: Army - MI, AT
Navy - AS, SH
Air Force - 11, 99
DLA-ES

Review activities: Army - AM, ME
Navy - MC, OS
Air Force -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities: Army - ME, AM; Navy - MC, OS; Air Force -

Review activities: Army - MI, AT; Navy - AS, SH; Air Force - 11, 99; DLA-ES

INCHES	MM
.002	.05
.003	.08
.005	.13
.008	.20
.010	.25
.016	.41
.090	2.29
.110	2.79
.118	3.00
.143	3.63
.150	3.81
.180	4.57
.195	4.95
.234	5.94
.235	5.97
.250	6.35
.260	6.60
.312	7.92
.370	9.40
.500	12.70
.511	12.96
.5625	14.29
1.125	28.58
1.500	38.10
1.673	42.49
1.969	50.01
2.281	57.94

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (0.38 mm).
3. Metric equivalents are given for general information only.
4. Tolerance between any two adjacent contact centers shall be ±.004 (0.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (0.15 mm).
5. Contact identification may be located on either side of the contact hole but shall appear on the front and rear of each insert.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitation for bid.
(D) 8. Designed for use with MIL-C-39029/34 contacts.
9. Contact hole details shall be in accordance with MIL-C-28748
10. The maximum insertion and withdrawal force (connector assembly) shall be 82.5 pounds.
11. Insert material shall be in accordance with MIL-C-28748.

APPROVED 20 December 1965 REVISED (D) for changes see page 2 of 2

P A Navy - EC Other Cust AF-85 Army - CR	International interest	TITLE Insert (insulator), rectangular connector, electrical, 66 (size 16 and 20 crimp removable) pin contacts	MILITARY STANDARD MS18184
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.