FED. SUP CLASS
5305

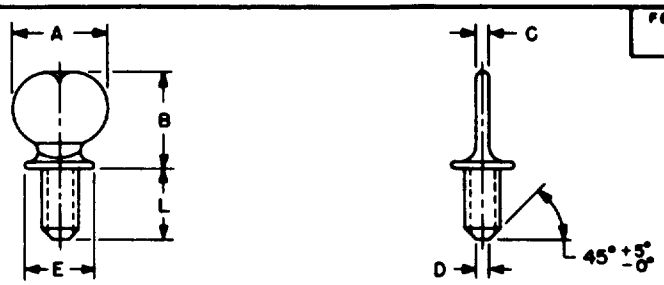


TABLE I

NOMINAL SIZE		.138	.164	.190	.250	.3125	.375
THREADS PER INCH (UNC-2A)		32	32	24	20	18	16
A HEAD WIDTH	MAX	.31	.36	.42	.55	.70	.83
	MIN	.29	.34	.40	.52	.67	.80
B HEAD HEIGHT	MAX	.33	.38	.48	.64	.78	.95
	MIN	.31	.36	.46	.61	.75	.92
C HEAD THICKNESS	MAX	.05	.06	.06	.07	.09	.11
	MIN	.04	.05	.05	.05	.07	.09
D DIAMETER OF FLAT	MAX	.07	.09	.10	.13	.17	.21
	MIN	.06	.08	.09	.12	.16	.19
E SHOULDER DIAMETER	MAX	.25	.31	.35	.47	.59	.76
	MIN	.23	.29	.32	.44	.56	.71

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.25	±.03	1					
.38				22			
.50		3	13	23	33	43	
.62				24	34		
.75		5	15	25	35	45	56
1.00				26	36	46	57
1.50	±.06			27	37	47	58
2.00				28	38	48	59
2.50	±.09				39	49	60
3.00						50	61

NOTES:

1. MATERIAL: Carbon steel in accordance with Fed. Std. No. 66 having a minimum ultimate tensile strength of 48,000 PSI.
2. PROTECTIVE COATING: Cadmium plated in accordance with QQ-P-416, Type II, Class 3 or MIL-C-81562, Type II, Class 3.
3. THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H28. Full form threads shall extend as close to the shoulder as practicable and shall be within 2-1/2 threads of the shoulder bearing surface.
4. BEARING SURFACE: The bearing surface of the shoulder shall be at right angles to the axis of the thumbscrew within ±2°.
5. DIMENSIONS: All dimensions in Table I are in inches. All dimensions in Table II are in millimetres.
6. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS21316-1.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

Ⓒ ENTIRE STANDARD REVISED

REVIEWER: AV, IS, NS
USER: AS, MC, ME, MU, OS, SH, WT

APPROVED 13 JUL 1959 REVISED Ⓐ 21 SEP 1965 Ⓑ 16 FEB 1967 Ⓒ 22 MAY 1974

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC	TITLE	MILITARY STANDARD
Other Cust YD 82	THUMBSCREW (SHOULDERED), FLAT POINT, CARBON STEEL, CADMIUM PLATED, UNC-2A	MS21316
PROCUREMENT SPECIFICATION FF-T-305	SUPERSEDES MS21317 and BTAX1	SHEET 1 OF 2

DD FORM SEP 67 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:32Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

TABLE II
METRIC TRANSLATION OF TABLE I

NOMINAL SIZE		3.50	4.17	4.83	6.35	7.94	9.52
THREAD PITCH		.79	.79	1.06	1.27	1.41	1.59
A HEAD WIDTH	MAX	7.9	9.1	10.7	14.0	17.8	21.1
	MIN	7.4	8.6	10.2	13.2	17.0	20.3
B HEAD HEIGHT	MAX	8.4	9.7	12.2	16.3	19.8	24.1
	MIN	7.9	9.1	11.7	15.5	19.0	23.4
C HEAD THICKNESS	MAX	1.3	1.5	1.5	1.8	2.3	2.8
	MIN	1.0	1.3	1.3	1.3	1.8	2.3
D DIAMETER OF FLAT	MAX	1.8	2.3	2.5	3.3	4.3	5.3
	MIN	1.5	2.0	2.3	3.0	4.1	4.8
E SHOULDER DIAMETER	MAX	6.4	7.9	8.9	11.9	15.0	19.3
	MIN	5.8	7.4	8.1	11.2	14.2	18.0

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
6.4	±.8	1					
9.6				22			
12.7		3	13	23	33	43	
15.7				24	34		
19.0		5	15	25	35	45	56
25.4				26	36	46	57
38.1	±1.5			27	37	47	58
50.8				28	38	48	59
63.5	±2.3				39	49	60
76.2						50	61

REVIEWER: AV, IS, NS
USER: AS, MC, ME, MU, OS, SH, WT

INTERCHANGEABILITY

Thumbscrews covered by the following dash numbers given in MS21317 are canceled after 16 February 1967. The canceled thumbscrews cannot always replace the new ones and should be used until existing stocks are depleted. Use only the new dash numbers for new design and replacement. Replacement shall be in accordance with Table III.

TABLE III

PART NUMBER		PART NUMBER		PART NUMBER		PART NUMBER	
CANCELED	NEW	CANCELED	NEW	CANCELED	NEW	CANCELED	NEW
MS21317	MS21316	MS21317	MS21316	MS21317	MS21316	MS21317	MS21316
1	1	29	23	47	37	64	56
2	*	30	24	48	38	65	57
3	3	31	25	49	39	66	*
4	*	32	26	50	*	67	58
5	5	33	*	53	43	68	59
6	*	34	27	54	45	69	60
15	*	35	28	55	46	70	61
16	13	42	33	56	*	75	*
17	*	43	34	57	47	77	*
18	15	44	35	58	48	78	*
19	*	45	36	59	49	79	*
20	22	46	*	60	50	80	*

* No replacement

APPROVED 13 JUL 1959 REVISED (A) 21 SEP 1965 (B) 16 FEB 1967 (C) FOR CHANGES SEE SHEET 1.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust YD 82	TITLE THUMBSCREW (SHOULDERED), FLAT POINT, CARBON STEEL, CADMIUM PLATED, UNC-2A	MILITARY STANDARD MS 21316
PROCUREMENT SPECIFICATION FF-T-305	SUPERSEDES MS21317 and BTAI1	SHEET 2 OF 2

DD FORM 672-1 (Continuing)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:32Z
Check the source to verify that this is the current version before use.