
FED SUP CLASS

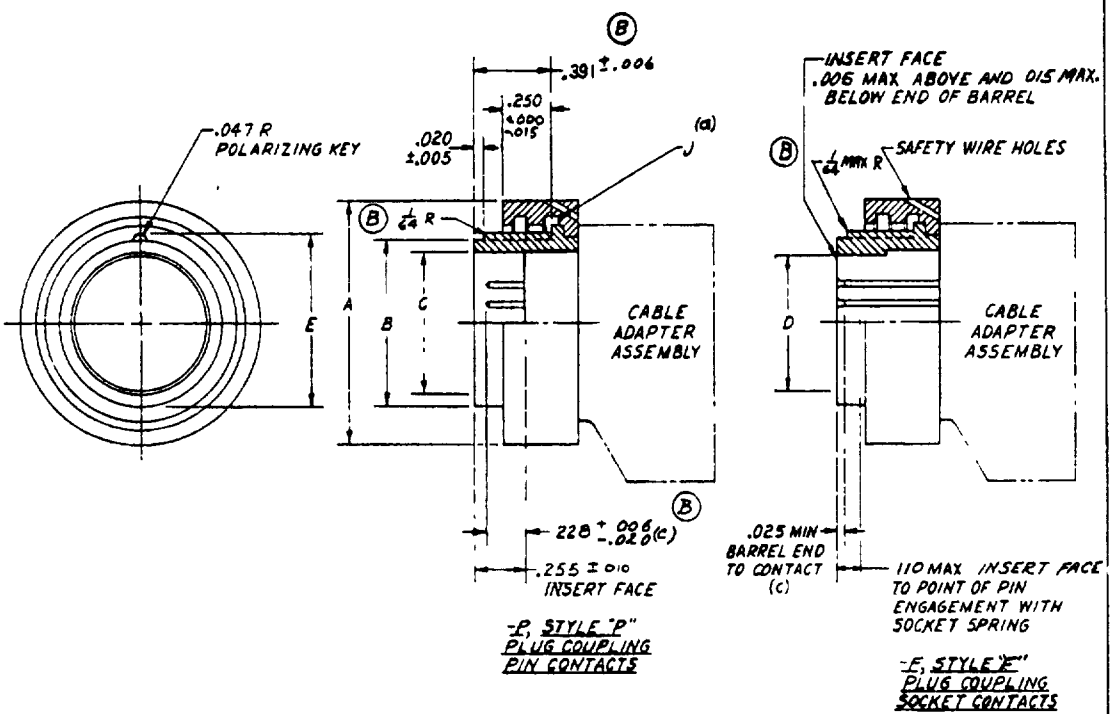

-P, STYLE "P" PLUG COUPLING PIN CONTACTS

-E, STYLE "E" PLUG COUPLING SOCKET CONTACTS

SIZE	A MAX O.D	B BARREL O.D +.000 -.015	C +.010 -.000 DIA.	D MAX INSERT O.D	E BARREL O.D PLUS KEY +.002 -.010	(a) J COUPLING THREAD FEMALE
16	1 13/64	.807	.656	.642 .640	.839	1-6
19	1 11/32	.948	.812	.798 .796	.982	1 3/16-6
21	1 1/2	1.135	1.000	.986 .984	1.171	1 5/16-6

(a) DIMENSION "J" REFERS TO A MODIFIED ACME THREAD DETAILS ARE SPECIFIED IN MIL-C-25955.

(c) DIMENSIONS ON PIN AND SOCKET LOCATIONS APPLY WHEN CONTACTS ARE PLACED IN INSERTS FOR INSPECTION OR APPLICATION.

THE DIMENSIONS COVERED BY THIS DESIGN STANDARD APPLY TO CONNECTORS IN ACCORDANCE WITH MIL-C-25955 AND WHEN SPECIFIED AS A PART OF APPLICABLE MS STANDARDS COVERING INDIVIDUAL CONNECTORS

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES. DECIMALS ±.002 FRACTIONS ±1/64.

CONTACTS SUPPLIED WITH BUT NOT INSTALLED IN CONNECTORS.

THIS IS A DESIGN STANDARD - NOT USED AS A PART NUMBER

CUSTODIANS	OTHER INT	MILITARY STANDARD	MS24243 (USAF)
Air Force	A - N - AF -	COUPLING DIMENSIONS - RECEPTACLE ELECTRICAL CONNECTOR	
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 2	

APPROVED 9 JAN 58 REVISED (A) 27 MAY 58 (B) 28 OCT 60

NOTICE When Government drawings specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated furnished or in any way supplied the said drawings specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto


DD FORM 672-1 1 OCT 52

M W M CORP DAYTON, OHIO 11/60 3x00

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.

NOTICE When Government drawings specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated furnished or in any way supplied the said drawings specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto

FED SUP CLASS

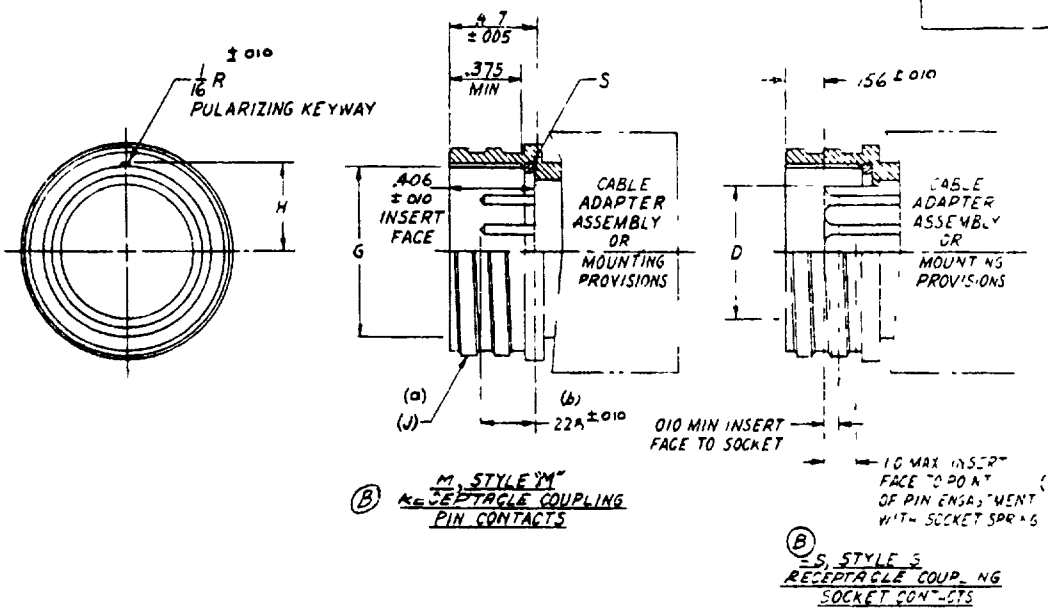

(B) M, STYLE "M" RECEPTACLE COUPLING PIN CONTACTS

(B) S, STYLE S RECEPTACLE COUPLING SOCKET CONTACTS

SIZE	(B) D MAX INSERT O.D	J COUPLING THREAD	G SLEEVE I.D +.010 -.000 MALE (a)	(B) H SLEEVE RAD PLUS KEYWAY	S O RING (c)
16	.642	1-6	.811	.843	MS29513-19
9	.798	1 3/16 - 6	.952	.984	MS29513-21
21	.986	1 5/16 - 6	1.139	1171	MS29513 24

(a) DIMENSION J REFERS TO A MODIFIED ACME THREAD DETAILS ARE SPECIFIED IN MIL-C-25955.

(b) DIMENSIONS ON PIN AND SOCKET LOCATIONS APPLY WHEN CONTACTS ARE PLACED IN INSERTS FOR INSPECTION OR APPLICATION.

THE DIMENSIONS COVERED BY THIS DESIGN STANDARD APPLY TO CONNECTORS IN ACCORDANCE WITH MIL-C-25955 AND WHEN SPECIFIED AS A PART OF APPLICABLE MS STANDARDS COVERING INDIVIDUAL CONNECTORS

(B) DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES. DECIMALS ± 002, FRACTIONS ± 1/64

(c) APPLICABLE FOR DIMS ONLY

CONTACTS SUPPLIED WITH BUT NOT INSTALLED IN CONNECTORS.

APPROVED 5 MAY 56 (1) REVISED 1) 18 OCT 60

THIS IS A DESIGN STANDARD - NOT USED AS A PART NUMBER

CUSTODIANS	OTHER INT
Air Force	A - N - AF -

MILITARY STANDARD

COUPLING DIMENSIONS – RECEPTACLE ELECTRICAL CONNECTOR

MS24243 (USAF)

PROCUREMENT SPECIFICATION NONE

SUPERSEDES:

SHEET 2 OF 2

DD FORM 672-1
1 OCT 52

MWM CORP DAYTON, OHIO
11/60 3500

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.