

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


FED. SUP CLASS. 5355

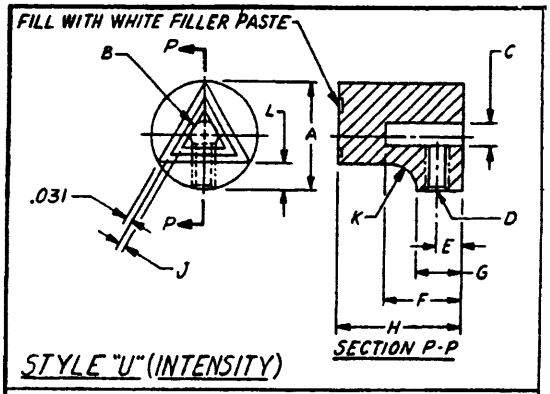

STYLE "U" (INTENSITY)

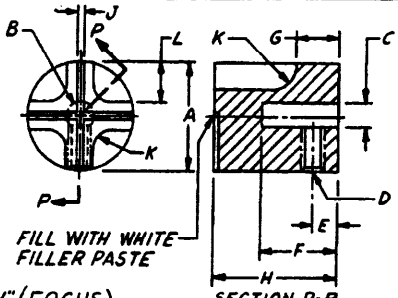

STYLE "V" (FOCUS)

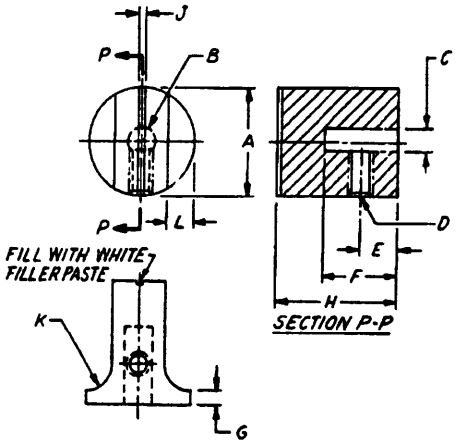

STYLE "W" (DIMMER)

		DIMENSIONS											
MS PART NO.	FIIN	A SIZE DIA OF BASE	KNOB FORM	B SHAFT HOLE DIA +.002	C ACROSS FLAT +.002	D THREAD SIZE	E	F	G	H	J LINE WIDTH	K RAD	L
MS24244U1		.500	PLAIN SKIRT	.127	.110	4-40 UNC-3B	.125	.375	.219	.594	.031	.047	.125
MS24244V1													.188
MS24244W1							.188		.062				.125

Material: Aluminum alloy, Spec. QQ-A-591, Alloy No. 218

Finish: Material; Anodize per Spec. MIL-A-8625, Type II, dyed a lusterless grey color conforming to color No. 36231 or lusterless black color conforming to color No. 37038 per Fed. Std 595.
The white filler paste shall be a lusterless white color conforming to color No. 37875 per Fed. Std 595.

Round all edges .031 R max. except base edge .015 R max.

Dimensions in inches. Unless otherwise specified, tolerances: decimals ±.016

All threads to be per Spec. MIL-S-7742

Example of part No. MS24244U1G
Knob drawing No. MS24244 Style U Size 1 Color G
Color is designated by "G" for Grey and "B" for Black

The value of contrast between the white line and body color shall be not less than 2.5 as determined in specification MIL-P-7788.

Set Screw: Type III, Style 4, No.4-40 UNC-3A in accordance with Spec. FF-S-103 and locking element with torque requirements per Spec. MIL-F-18240, length to suit.

The knob shall be marked on the bottom surface for identification per MIL-STD-130.

This standard takes precedence over documents referenced herein.

Referenced documents shall be the issue in effect on date of invitations for bid.

This standard has been approved by the department of the Air Force and is mandatory for use by that department. All other military activities are required to employ this standard where suitable.

APPROVED 3 August 1959 REVISED

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS24244 (USAF)
Air Force	A - N - AF -	KNOB-CONTROL, BRAILLE, METAL	
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:		SHEET 1 OF 1

DD FORM 672-1
1 OCT 52

PROPOSED MS24244

Source: https://assist.dla.mil -- Downloaded: 20261O-23T14:50Z
Check the source to verify that this is the current version before use.