This standard has been approved by the Bureau (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DD FORM 1426 672-1 (Revised coordination)

P.A. USAF - ANSC
Other Cust
Navy - Wep

PROCUREMENT SPECIFICATION
MIL-C-25[illegible]


SUPERSEDES: USAF 5589059

TITLE
SLEEVE - TYPE MA-2, FLIGHT PRESSURE REFUELING, RECEPTION COUPLING

MILITARY STANDARD

MS24362(ASG)

SHEET 1 OF 1

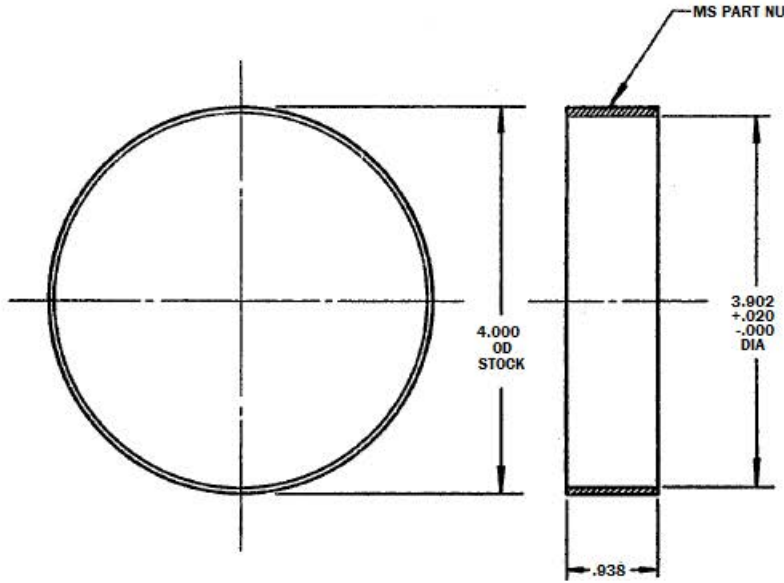

DASH NO.	MAX WT LB Ⓐ
-1	.162

MATERIAL: 304 CORROSION-RESISTANT STEEL TUBING, TYPE I OR II, CONDITION-ANNEALED, SPECIFICATION MIL-T-8506.
REMOVE ALL BURRS AND BREAK SHARP EDGES .010 TO .020.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS +/- .010.

FSC 1660

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 18 May 56 REVISED Ⓐ 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.