
FED. SUP. CLASS
4730

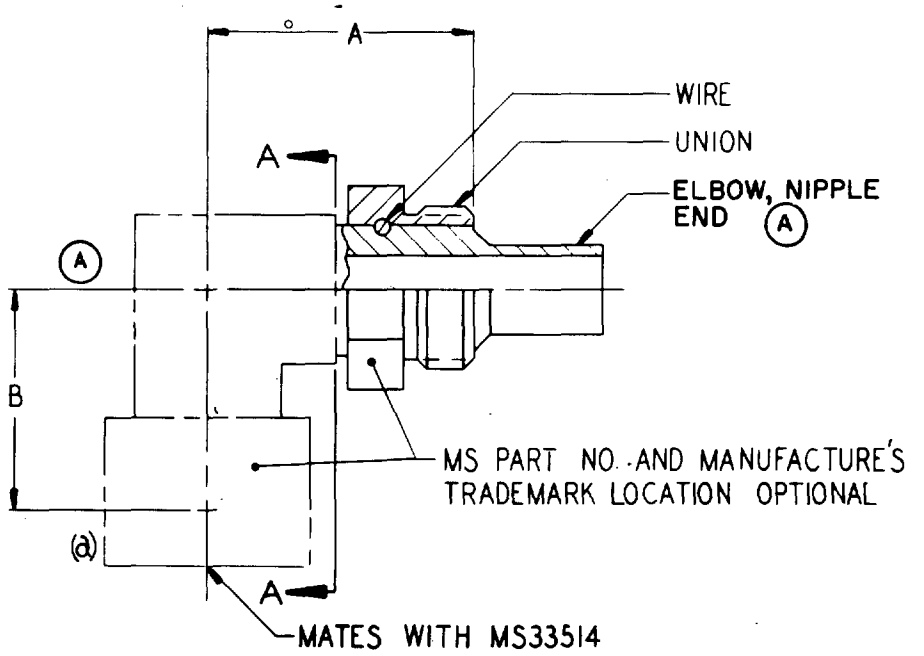

MS PART NO.	WIRE	UNION	(A) ELBOW, NIPPLE END	A ± .020	B ± .020
(b) MS27390-3/-4C (A)	MS27072-4C	MS27071-4C	MS27394-3/-4C	.845	.741
MS27390-4C			MS27394-4C		.725
MS27390-5C	MS27072-5C	MS27071-5C	MS27394-5C	.900	.808
MS27390-6C	MS27072-6C	MS27071-6C	MS27394-6C	.965	.915
MS27390-8C	MS27072-8C	MS27071-8C	MS27394-8C	1.235	1.052
MS27390-8			MS27394-8D		

(A) "A" IS THE DIMENSION BETWEEN THE HOSE END OF THE THREADED SECTION OF THE UNION AND THE CENTERLINE OF THE INSERT.

(A) "B" IS THE DIMENSION BETWEEN THE CENTERLINE OF THE NIPPLE AND THE FREE END OF THE INSERT.

(A) FOR CHANGES SEE SHEET 1.

APPROVED 2 May 66 REVISED (A) 30 Jun 72

User Activities: Army - WC, ME, MI

Review Activities: Army - AV Navy - AS Air Force - 82

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

Air Force - 11 (A)	ELBOW SUB ASSEMBLY, FLARELESS, 90° FORGED, SWIVEL NUT	MILITARY STANDARD
Army - AV Navy - AS		MS27390
Procurement Specification MIL-F-27272	SUPERSEDES	SHEET 1 OF 2

DD FORM 672

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

MATERIAL : SUFFIX "C" : CORROSION RESISTING STEEL. SUFFIX "D" : ALUMINUM ALLOY. NO SUFFIX : COMBINATION OF ALUMINUM ALLOY AND CORROSION RESISTING STEEL. SEE MS STANDARDS LISTED ON SHEET 1 FOR MATERIAL SPECIFICATIONS.
CORROSION RESISTING STEEL DO NOT PASSIVATE. ALUMINUM ALLOY : ANODIZE SPECIFICATION MIL-A-8625, TYPE II, DYE YELLOW.

THESE PARTS FOR USE WITH MIL-H-27267 HOSE.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

ANY FORGED DESIGN OF ADAPTER COMPONENTS TO THE LEFT OF PLANE A-A IS ACCEPTABLE PROVIDED : DIM'S "A" AND "B", THE MATERIALS SPECIFIED, THE FABRICATION NOTES OF THIS STANDARD AND REQUIREMENTS OF THE PROCUREMENT SPECIFICATION ARE MET.

(a) IF REQUIRED, LOCKWIRE HOLES TO BE DRILLED IN ACCORDANCE WITH AS1043 AND SUFFIX "L" ADDED TO PART NUMBER, EXAMPLE : MS27390-8CL.

(b) SWIVEL NUT AND SEALING SURFACE OF ELBOW SHALL MATE WITH MS33514-3 FITTING. THE REMAINING PORTION OF THE ASSEMBLY SHALL MATE WITH MIL-H-27267-4 HOSE.

NEXT ASSEMBLY MS27385.

APPROVED 2 May 66 REVISED (A) FOR CHANGES SEE SHEET 1.

User Activities: Army-WC, ME, MI

Review Activities: Army-AV Navy-AS Air Force-82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Air Force-11 (A) Other Cust Army-AV Navy-AS	TITLE ELBOW SUB ASSEMBLY, FLARELESS, 90° FORGED, SWIVEL NUT	MILITARY STANDARD MS27390
Procurement Specification MIL-F-27272	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.