

FED SUP CLASS
5935

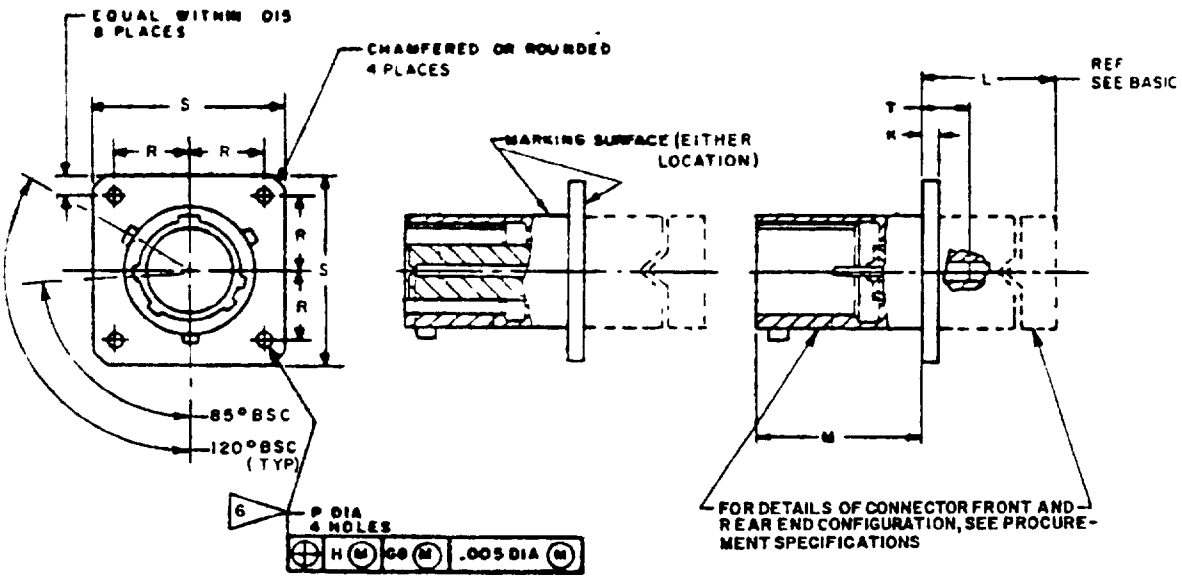

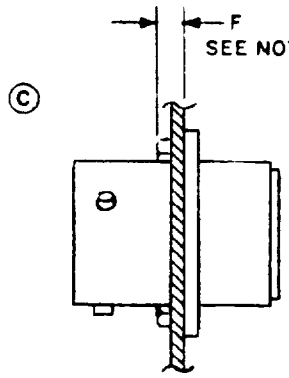

Class E[1/], T and P[2/]
1/ Class E inactive for new design.
2/ Class P inactive for new design for Air Force.

EXAMPLE OF PART NUMBER
MS27656 T 18 F 18 P A

MS NO. CLASS SHELL SIZE FINISH INSERT ARR STYLE (P OR S) POLARIZATION NO LETTER REQUIRED FOR NORMAL

C DENOTES CHANGE

P.A. AF-85 Other Cust ARMY-CR NAVY-AS	International interest	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, BACK PANEL WALL MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES I	MILITARY STANDARD MS 27656
Preparing Activity MIL-C-38999		SUPERSEDES MS0027656 (USAF)	PAGE 1 OF 2

DD FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3234-4

APPROVED 7 JUL 1971
REVISED (A) 13 AUG 74 (B) 2 JAN 76 (C) 15 APR 82

User activities Army - Navy - Air Force -
Army - MI, MU
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA-ES
Review activities
Department and Agencies of the
Military Standard - approved for use by
Department of Defense. Selection for all new engineering and design applications
shall be made from this document when applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

SHELL SIZE	K +.015 -.000	LE MAX	LF MAX	LT MAX	M +.000 -.005	P DIA +.010 -.005	R BSC	S +.020	T MAX	F MAX
		SEE BASIC								
9	↑	↑	↑	↑	↑	↑	.3595	938	↑	
11							.406	1.031		
13							.453	1.125		
15	.085	469	.719	.469	.820	.128	.4845	1.219	.156	.234
17							.531	1.312		
19							.578	1.438		
21	↑	.500	750	.500	↑	↓	.625	1.562	.188	.204
23	.115	.500	.750	.500	.790	.147	.6875	1.688	.188	
25	↓	.500	.750	.500	↓	147	.750	1.812	.188	.193

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	188	4.78	.500	12.70	.820	20.83
007	18	193	4.90	531	13 49	.938	23.83
.010	.25	.204	5.18	.560	14.22	1.031	26.19
015	.38	234	5 94	.578	14.68	1.125	28.58
020	.51	3595	9.13	.625	15.88	1.219	30.96
.085	2.16	406	10.31	.6875	17.46	1.312	33.32
.115	2.92	.453	11.51	.719	18.26	1.438	36.53
129	3.25	469	11.91	750	19.05	1.562	39 67
.156	3.96	4845	12.31	.790	20.07	1.688	42.98
						1.812	46.02

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25 4 mm
3. For main keyway and keyway positions, see MIL-C-38999.
4. For design feature purposes, this standard takes precedence over documents referenced herein.
5. Referenced documents shall be of the issue in effect on date of invitation for bid
6. The gage features for GG shall be .010 (.25 mm) smaller than the MMC size at basic location.
7. Maximum panel thickness including mounting hardware.

(C) (C) (C)

REVISED (C) For changes see pages 1&2

APPROVED 7 JUL 1971

P.A. AF-85	International interest	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, BACK PANEL WALL MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES I	MILITARY STANDARD
Other Cust ARMY-CR NAVY-AS			MS 27656
Preparing Specification MIL-C-38999		SUPERSEDES MS 0027656 (USAF)	PAGE 2 OF 2

DD FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

User activities: Army - Navy - Air Force -
Review activities: Army - MI, MU; Navy - EC, MC, OS; Air Force - 11, 15, 17, 99; DLA - ES

This military standard is approved for use by ... Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:47Z
Check the source to verify that this is the current version before use.