This standard is approved for use by all Departments and Agencies of the Department of Defense [illegible] for all [illegible] engineering and design applications and for repetitive use shall be made from this document

REVIEWER ACTIVITIES ARMY - MI, AT
DLA - IS

USER ACTIVITIES ARMY - AV
NAVY - MC, EC

FED SUP CLASS
5305

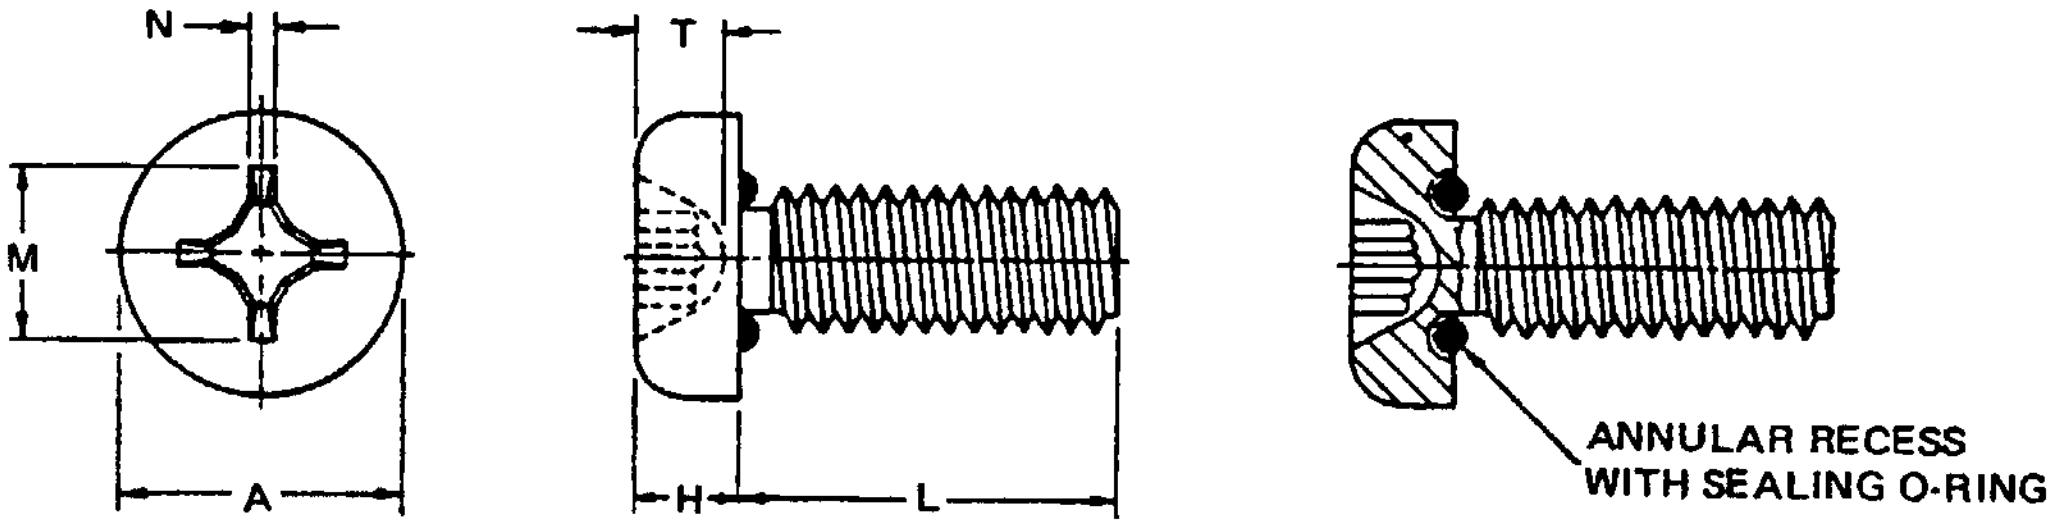

NOMINAL SIZE			#4 112	#6 138	#8 164	#10 190	#10 190	1/4 250
THREADS PER INCH			40UNC-2A	32UNC-2A	32UNC-2A	32UNF-2A	24UNC-2A	20UNC-2A
A HEAD DIAMETER	MAX		.238	.294	347	.403	403	517
	MIN		.205	.256	.306	357	.357	.473
H HEAD HEIGHT	MAX		080	097	.115	.133	.133	.175
	MIN		.070	.087	.105	.122	122	.162
M DIAMETER OF RECESS	MAX		122	166	.182	199	199	.281
	MIN		109	.153	169	186	.186	268
T DEPTH OF RECESS	MAX		078	091	.108	.124	.124	.161
	MIN		.060	066	.082	.100	.100	.135
N WIDTH OF RECESS	MIN		.019	.028	030	.031	.031	.036
DRIVER SIZE			1	2	2	2	2	3
	L LENGTH	TOLERANCE	*DASH NO	*DASH NO	*DASH NO	*DASH NO	*DASH NO	*DASH NO
LENGTH OF THREAD (SEE NOTE 4)	250	+0 00 -0 02	1	11	21	-	-	-
	.312		2	12	22	-	-	-
	375		3	13	23	31	39	47
	438		4	14	24	32	40	48
	.500	+0 00 -0 03	5	15	25	33	41	49
	**562		**6	**16	**26	**34	**42	**50
	625		7	17	27	35	43	51
	750		8	18	28	36	44	52
	875		9	19	29	37	45	53
	1.000		10	20	30	38	46	54
	**1 125	+0 00 -0 06	-	-	-	-	-	**55
	1 250		-	-	-	-	-	56

*(See NOTE 8)
**Inactive for new design after 30 April 1977.
For NOTES See PAGE 2

Ⓐ ENTIRE STANDARD REVISED

APPROVED 27 May 1968 REVISED Ⓐ 30 April 1977

P A OS
Other Cust WC
99

INTERNATIONAL INTEREST

TITLE
SCREWS, MACHINE, PAN HEAD, CROSS RECESSED,
SELF-SEALING, INTEGRAL FLUOROSILICONE
O-RING, PLAIN AND SELF-LOCKING

MILITARY STANDARD
MS3213

PROCUREMENT SPECIFICATION
MIL-S-82496

SUPERSEDES:

SHEET 1 OF 2

5305-1340

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:01Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

USER ACTIVITIES
ARMY - AV
NAVY - MC, EC

REVIEWER ACTIVITIES
ARMY - MI, AT
DLA - IS

NOTES·

1 **MATERIAL·**
- (a) Screw Corrosion-resisting steel (CRES) in accordance with MIL-S-82496
- (b) O-ring Fluorosilicone rubber, Composition B in accordance with MIL-S-82496 (resistant to MIL-H-5606 hydraulic fluid and Type III fuel of TT-S-735)

2 **PROTECTIVE COATING.** Screws shall be passivated in accordance with QQ-P-35.

3 **THREADS·** Threads shall be in accordance with NBS Handbook H28

4 **THREAD LENGTH.** Length of thread shall be in accordance with ANSI B18 6 3-1972

5 **RECESS.** The recess shall be in accordance with the dimensions of Type I cross-recessed pan head machine screws of ANSI B18 6 3-1972

6 **SELF-LOCKING ELEMENT·** When self-locking screws are required, the self-locking element shall be a non-metallic element in accordance with MIL-F-18240 and MS15981

7 **DIMENSIONS:** All dimensions are in inches

8 **PART NUMBER:** The MS part number consists of the MS number, plus the dash number, plus the letter "L" for self-locking screws

Examples MS3213-29 is the part number for a 0 875-inch long .164-32 UNC-2A screw MS3213-29L is the part number for an identical screw with the self-locking feature added

9 **OTHER NOTES**
- (a) For design feature purposes, this standard takes precedence over procurement documents referenced herein.
- (b) Referenced documents shall be of the issue in effect on the date of invitations for bids, or request for proposal, except that industry documents shall be of the date of the issue adopted

APPROVED 27 May 68 REVISED Ⓐ For changes see pages 1 and 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all engineering and design applications and for repetitive use shall be made from this document

P A Other Cust	OS WC 99	INTERNATIONAL INTEREST	TITLE SCREWS, MACHINE, PAN HEAD, CROSS-RECESSED, SELF-SEALING, INTEGRAL FLUOROSILICONE O-RING, PLAIN AND SELF-LOCKING	**MILITARY STANDARD** **MS3213**
PROCUREMENT SPECIFICATION MIL-S 82496	SUPERSEDES:			SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:01Z
Check the source to verify that this is the current version before use.