
FED. SUP CLASS
5305

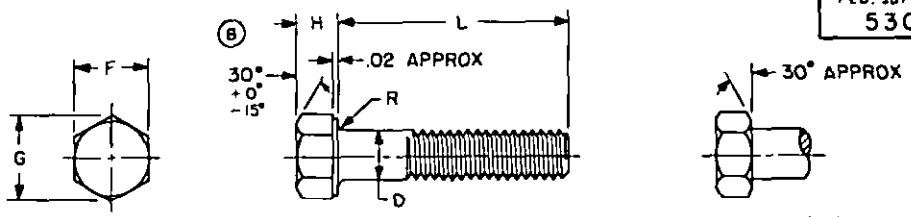

NOMINAL SIZE		.250	.3125	.375	.4375	.500	.5625	.625
THREADS PER INCH (UNF-2A)		28	24	24	20	20	18	18
D BODY DIAMETER	MAX	.250	.3125	.375	.4375	.500	.5625	.625
	MIN	.245	.3065	.369	.4305	.493	.5545	.617
F WIDTH ACROSS FLATS	MAX	.4375	.500	.5625	.625	.750	.8125	.9375
	MIN	.4280	.489	.5510	.612	.736	.7980	.9220
G WIDTH ACROSS CORNERS	MAX	.505	.577	.650	.722	.866	.938	1.083
	MIN	.488	.557	.628	.698	.840	.910	1.051
H HEAD HEIGHT	MAX	.163	.211	.243	.291	.323	.371	.403
	MIN	.150	.195	.226	.272	.302	.348	.378
R RADIUS	MAX	.025	.025	.025	.025	.025	.045	.045
	MIN	.015	.015	.015	.015	.015	.020	.020
TENSILE STRENGTH (LBS-MIN)		2,180	3,480	5,260	7,120	9,590	12,180	15,360

L LENGTH	TOLERANCE: SIZE .375 AND UNDER	TOLERANCE: SIZES .4375 AND .500	TOLERANCE: SIZES .5625 AND .625	DASH NO.	DASH NO. *	DASH NO.	DASH NO. *	DASH NO.	DASH NO. *	DASH NO.
.375	+.000 -.030	+.000 -.030	+.000 -.030	301	327	353				
.438				302*	328	354*	379			
.500				303	329	355	380	404		
.562				304*	330	356*	381	405*	430	
.625				305	331	357	382	406	431	455
.750				306	332	358	383	407	432	456
.875				307	333	359	384	408	433	457
1.000				308	334	360	385	409	434	458
1.125	+.000 -.040	+.000 -.060	+.000 -.080	309*	335	361*	386	410*	435	459*
1.250				310	336	362	387	411	436	460
1.375				311*	337	363*	388	412*	437	461*
1.500				312	338	364	389	413	438	462
1.750				313	339	365	390	414	439	463
2.000				314	340	366	391	415	440	464
2.250				315	341	367	392	416	441	465
2.500				316	342	368	393	417	442	466
2.750	+.000 -.060	+.000 -.080	+.000 -.100	317	343	369*	394	418*	443	467*
3.000				318	344	370	395	419	444	468
3.250				319*	345	371*	396	420*	445	469*
3.500				320	346	372	397	421	446	470
3.750				321*	347	373*	398	422*	447	471*
4.000				322	348	374	399	423	448	472
4.250	+.000 -.100	+.000 -.100	+.000 -.100	323*	349	375*	400	424*	449	473*
4.500				324	350	376	401	425	450	474
4.750				325*	351	377*	402	426*	451	475*
5.000				326	352	378	403	427	452	476
5.500								428	453	477
6.000								429	454	478

* INACTIVE FOR NEW DESIGN - Dash numbers 327 thru 352, 379 thru 403, 430 thru 454 and those with an (*) are inactive for new design.

(B)

(B) For changes see sheets 1 and 2.

REVIEWER: AT, AV, IS, MU, NS
USER: MC, ME, MI, OS, YD

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 4 MAR 1954 REVISED (A) 30 SEP 1966 (B) 15 FEB 1973

P.A. WC
Other Cust SH
82

TITLE
SCREW, CAP, HEXAGON HEAD - NAVAL BRASS, PLAIN FINISH, UNF-2A

MILITARY STANDARD
MS 35310

PROCUREMENT SPECIFICATION
FF-S-85

SUPERSEDES:

SHEET 1 OF 2

DD FORM 672-1 (Coordinated)

PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:20Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

NOMINAL SIZE		.750	.875	1.000	1.125	1.250
THREADS PER INCH (UNF-2A)		16	14	12	12	12
D BODY DIAMETER	MAX	.750	.875	1.000	1.125	1.250
	MIN	.741	.866	.990	1.114	1.239
F WIDTH ACROSS FLATS	MAX	1.125	1.3125	1.500	1.6875	1.875
	MIN	1.100	1.2850	1.469	1.6310	1.812
G WIDTH ACROSS CORNERS	MAX	1.299	1.516	1.732	1.949	2.165
	MIN	1.254	1.465	1.675	1.859	2.066
H HEAD HEIGHT	MAX	.483	.563	.627	.718	.813
	MIN	.455	.531	.591	.658	.749
R RADIUS	MAX	.045	.065	.095	.095	.095
	MIN	.020	.040	.060	.060	.060
(B) TENSILE STRENGTH (LBS-MIN)		22,380	30,540	39,780	49,640	62,200

L LENGTH	TOLERANCE SIZE .750	TOLERANCE SIZES .875 AND 1.000	TOLERANCE SIZES 1.125 AND 1.250	DASH NO.	DASH NO. *	DASH NO.	DASH NO. *	DASH NO.
.750	+.000	+.000	----	479				
.875	-.030	-.040		480	502			
1.000				481	503	524		
1.125				482*	504	525*	545	
1.250				483	505	526	546	565
1.375				484*	506	527*	547	566*
1.500	+.000	+.000	+.000	485	507	528	548	567
1.750	-.080	-.100	-.120	486	508	529	549	568
2.000				487	509	530	550	569
2.250				488*	510	531*	551	570*
2.500				489	511	532	552	571
2.750				490*	512	533*	553	572*
3.000				491	513	534	554	573
3.250	+.000	+.000	+.000	492*	514	535*	555	574*
3.500	-.100	-.140	-.160	493	515	536	556	575
3.750				494*	516	537*	557	576*
4.000				495	517	538	558	577
4.250				496*	518	539*	559	578*
4.500				497	519	540	560	579
4.750	+.000	+.000	+.000	498*	520	541*	561	580*
5.000	-.100	-.160	-.180	499	521	542	562	581
5.500				500	522	543	563	582
6.000				501	523	544	564	583

(B) * INACTIVE FOR NEW DESIGN - Dash numbers 502 thru 523, 545 thru 564 and those with an (*) are inactive for new design.

NOTES:

(B) 1. MATERIAL: Naval Brass in accordance with QQ-B-637, alloy no. 464, half-hard or alloy no. 462, hard having a minimum ultimate tensile strength of 60,000 PSI for sizes thru 1.000, and 58,000 PSI for sizes over 1.000.

2. PROTECTIVE COATING: None.

3. THREADS: The threads shall be in accordance with Screw Thread Standards for Federal Services, Handbook H28.

4. DIMENSIONS: All dimensions are in inches, unless otherwise specified.

5. THREAD LENGTH: Minimum thread length shall be twice the diameter plus 0.250 inch. The tolerance shall be plus 0.188 inch or 2-1/2 threads, whichever is greater. On screws that are too short for minimum thread lengths, the distance from the head bearing surface to the first complete thread shall not exceed the length of 2-1/2 threads for sizes thru 1.000 and 3-1/2 threads for sizes over 1.000.

6. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35310-301

7. Referenced documents shall be of the issue in effect on date of invitations for bid.

8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

INTERCHANGEABILITY

The former dash numbers of MS35310 (1 thru 283) are cancelled and superseded by the present dash numbers of MS35310 (301 thru 583 respectively). Use only the present dash numbers for new design.

REVIEWER: AT, AV, IS, MC, NS
USER: MC, ME, MI, OS, YD

APPROVED 4 MAR 1954 REVISED (A) 30 SEP 1966 (B) FOR CHANGES SEE SHEETS 1 AND 2.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	TITLE	MILITARY STANDARD
Other Cust SH 82	SCREW, CAP, HEXAGON HEAD - NAVAL BRASS, PLAIN FINISH, UNF-2A	MS 35310
PROCUREMENT SPECIFICATION FF-S-85	SUPERSEDES:	SHEET 2 OF 2

DD FORM 672-1 (Commissioned) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1973-714-542/4039

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:20Z
Check the source to verify that this is the current version before use.