
FED. SUP CLASS
2930

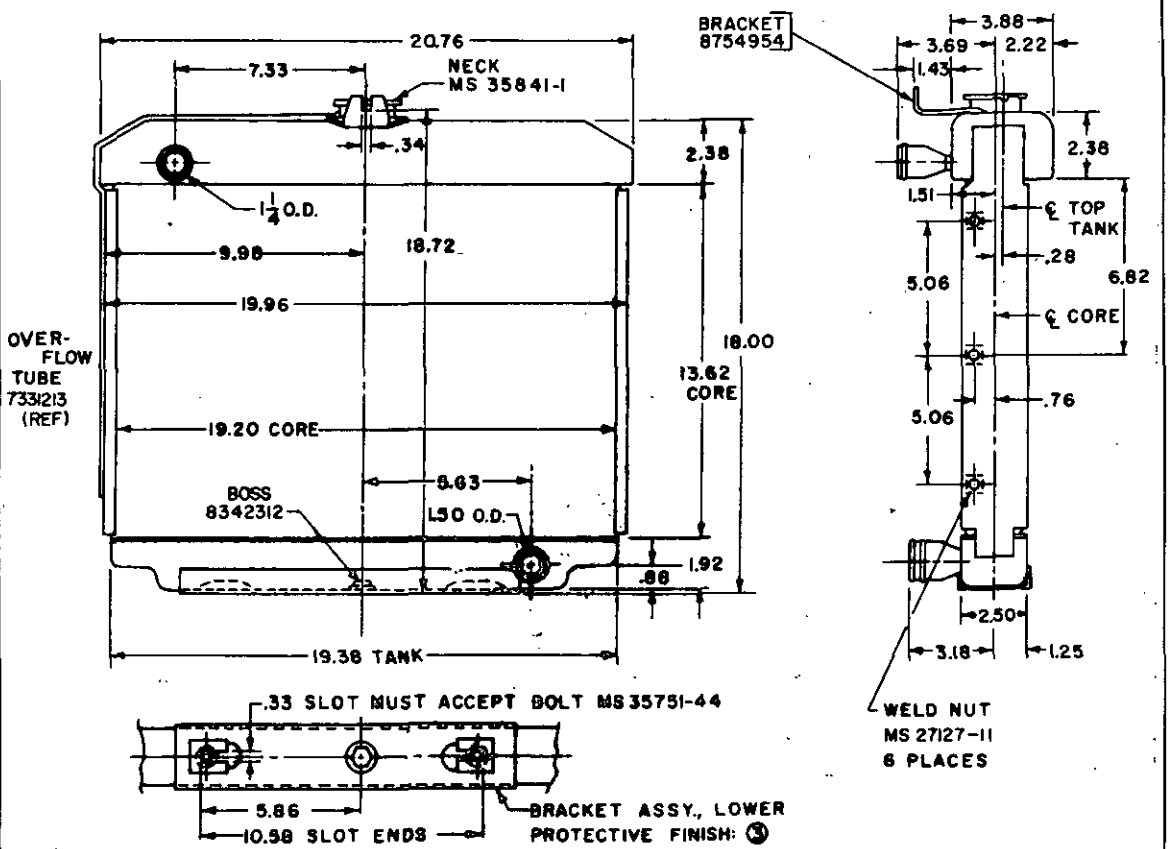

NOTES:

1. MATERIALS: HEADER, TANK, BAFFLE, HEADER REINFORCEMENT, CONNECTIONS: BRASS, COMP. 2, QQ-B-613. SADDLE AND REINFORCEMENT: STEEL, CARBON, 1009 TO 1020, QQ-S-698. SIDE SUPPORTS: TERNE SHEET, TYPE I, GRADE A, QQ-T-191. TUBES: BRASS, 70% CU, 30% ZN, MIL-C-50. FINS: COPPER, QQ-C-576. SOLDER, MIL-S-6872. USE SOLDER SN40 OR SN50, QQ-S-571.
2. PROTECTIVE FINISH: (GENERAL, EXCEPT AS NOTED): CONDITION IN ACCORDANCE WITH MIL-M-10578. PRIME PER TT-P-666. FINAL COATING PER CONTRACT REQUIREMENTS.
3. PROTECTIVE FINISH: (BRACKET ASSEMBLY, LOWER: ONLY) LEAD ALLOY COATING, TYPE III, COMPOSITION 12% TO 16% TIN, MIL-L-13762.
4. ASSEMBLY SHALL WITHSTAND A 10 PSIG INTERNAL PRESSURE.
5. HEAT REJECTION AND CORE RESISTANCE CURVES, SEE SHEET 2.
6. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES HANDBOOK H28.
7. DIMENSIONS ARE IN INCHES AND ARE FOR ENGINEERING REFERENCE ONLY.
8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
10. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
11. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.
12. DETAILS OF THIS ASSEMBLY SHALL BE IN ACCORDANCE WITH REFERENCED DRAWING, WHICH MAY BE OBTAINED FROM U.S. ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICHIGAN 48090.

Ⓑ CANCELLED AFTER 25 APRIL 1973
FOR NEW DESIGN AND PROCUREMENT USE DWG 10921887

MS PART NO.	REF DWG NO.
MS 51383-1	10921887

APPROVED 6 JUNE 1961 REVISED Ⓐ 9 FEBRUARY 1967 Ⓑ 25 APRIL 1973

REVIEW ACTIVITIES: AF—85
USER ACTIVITIES: ARMY—ME, MI; NAVY—MC, YD

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. ARMY—AT Other Cust NAVY—YD AF—82	TITLE RADIATOR, ENGINE COOLANT, AUTOMOTIVE: 1.83 SQUARE FEET FRONTAL CORE AREA	MILITARY STANDARD MS51383
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2930

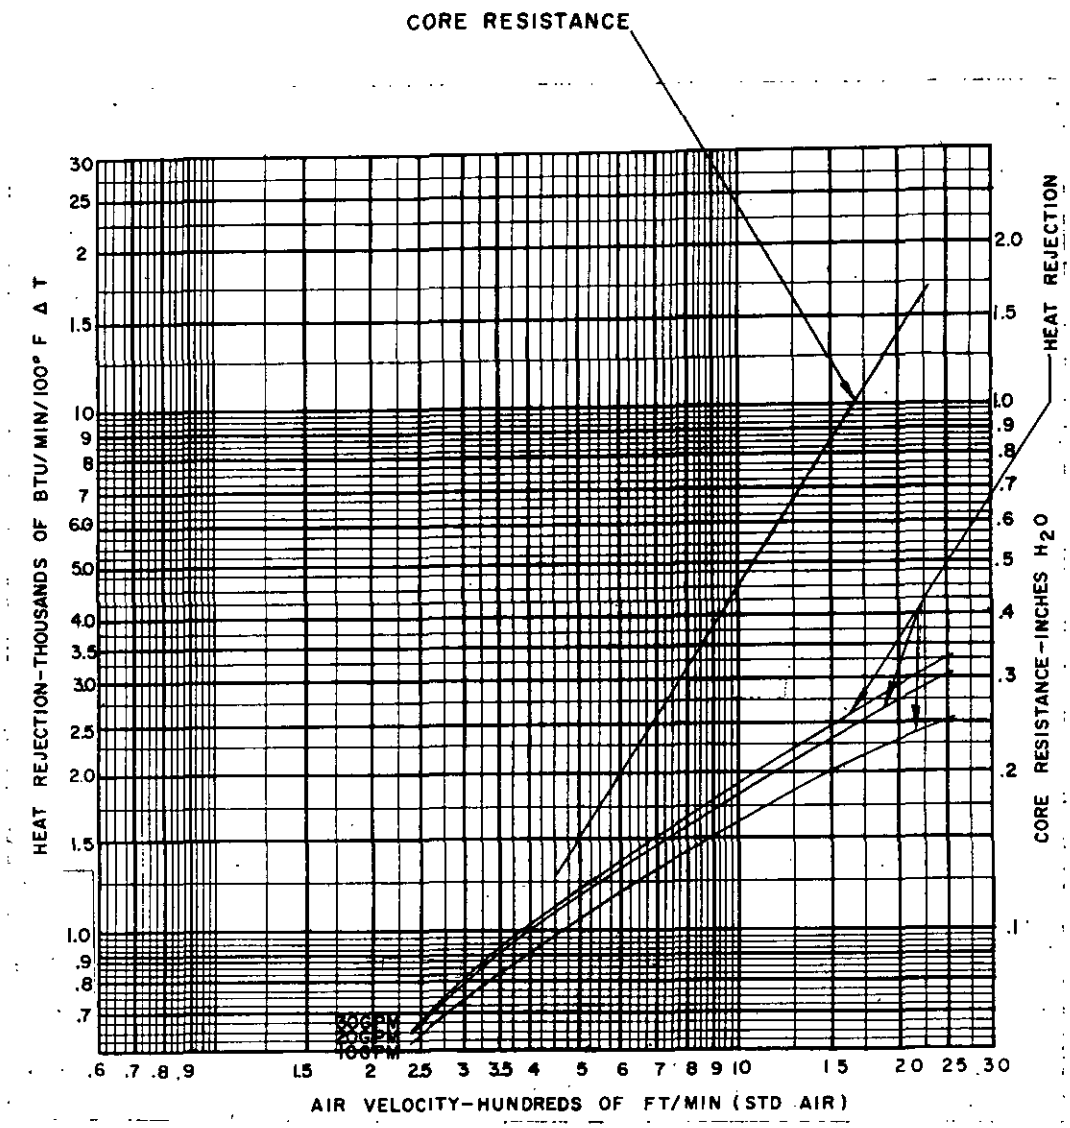

HEAT REJECTION AND CORE RESISTANCE CURVES

APPROVED 6 JUNE 1961 REVISED (B) FOR CHANGES SEE SHEET 1

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY—AT Other Cust NAVY—YD AF—82	TITLE RADIATOR, ENGINE COOLANT, AUTOMOTIVE: 1.83 SQUARE FEET FRONTAL CORE AREA	MILITARY STANDARD MS51383
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.