FED SUP CLASS
5305

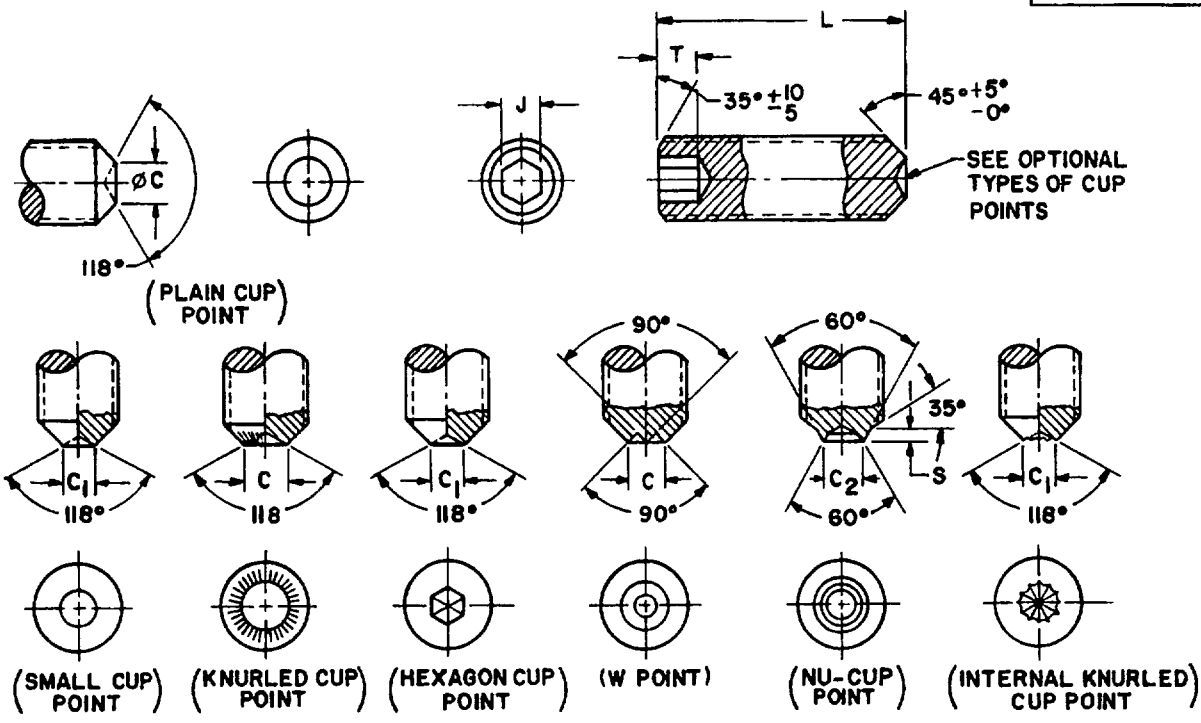


TABLE I DIMENSIONS AND PART NUMBERS

NOMINAL SIZE		.112	.138	.164	.190	.250	.3125	.375	.4375	.625
THREADS PER INCH UNC - 3A		40	32	32	24	20	18	16	14	11
J - SOCKET WIDTH ACROSS FLATS	NOM	.050	.062	.078	.094	.125	.156	.188	.219	.312
Ø C - POINT DIAMETER	MAX	.061	.074	.087	.102	.132	.172	.212	.252	.371
	MIN	.051	.064	.076	.088	.118	.156	.194	.232	.347
Ø C_1 - POINT DIAMETER	MAX	.056	.069	.082	.095	.125	.156	.187	.218	.312
	MIN	.051	.062	.074	.086	.114	.144	.174	.204	.295
Ø C_2 - POINT DIAMETER	MAX	.059	.074	.090	.101	.156	.190	.241	.286	.425
	MIN	.054	.068	.084	.095	.150	.185	.236	281	.420
S - POINT LENGTH	MAX	.013	.017	021	.024	.027	038	.041	.047	.067
	MIN	.008	.012	.016	019	022	033	.036	.042	.062
T - KEY ENGAGEMENT	MIN	070	.080	.090	.100	125	.156	.188	.219	.312
L - LENGTH	TOLERANCE	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO
.125		01								
.188		02		05						
.250				06			14			
.312				07						
.375	±.010				09	11	15	16		
438		03								
.500				08		12		17	19	
.625								18		
.750			04		10	13				20
1.000	±.020									

USER ACTIVITIES
ARMY-ME,MI
NAVY-MC,OS

REVIEWER ACTIVITIES
ARMY-AV,ER,EA
AIRFORCE-82
DLA-IS
NSA-NS

APPROVED 1 AUG 84 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	SH 99		SETSCREW, HEXAGON SOCKET, CUP POINT, ALLOY STEEL, UNC-3A	MS51476
PROCUREMENT SPECIFICATION		SUPERSEDES		PAGE 1 OF 2
FF-S-200				

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1484

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:02Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

REQUIREMENTS

1. MATERIAL. ALLOY STEEL IN ACCORDANCE WITH PROCUREMENT SPECIFICATION
2. HARDNESS. 45-53HRC
3. FINISH. ZINC COATING IN ACCORDANCE WITH ASTM B633-78, $Fe/Zn5$ (5 μm), TYPE II.
4. THREADS. THE THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.
5. PART NUMBER. THE BASIC MS PART NUMBER IS FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE I

   EXAMPLE: MS51476-01 - SETSCREW, HEXAGON SOCKET, CUP POINT, ALLOY STEEL, .112-40UNC-3A, LENGTH .125, ZINC COATED

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. TOLERANCES OF ANGLES IS $\pm$ 5° UNLESS OTHERWISE SPECIFIED.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

USER ACTIVITIES
ARMY-ME, MI
NAVY-MC, OS

REVIEWER ACTIVITIES
ARMY-AVER, EA
AIRFORCE-82
DLA-IS
NSA-NS

APPROVED 1 AUG 84 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

PA / Other Cust		INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
AR / SH	99		SETSCREW, HEXAGON SOCKET, CUP POINT, ALLOY STEEL, UNC-3A	MS51476
PROCUREMENT SPECIFICATION	SUPERSEDES			PAGE 2 OF 2
FF-S-200				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:02Z
Check the source to verify that this is the current version before use.