



FED. SUP CLASS
2320

REVIEW ACTIVITIES: ARMY-EL
USER ACTIVITIES: NAVY-DOCKS

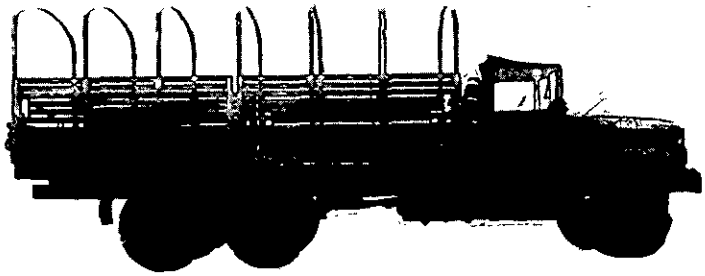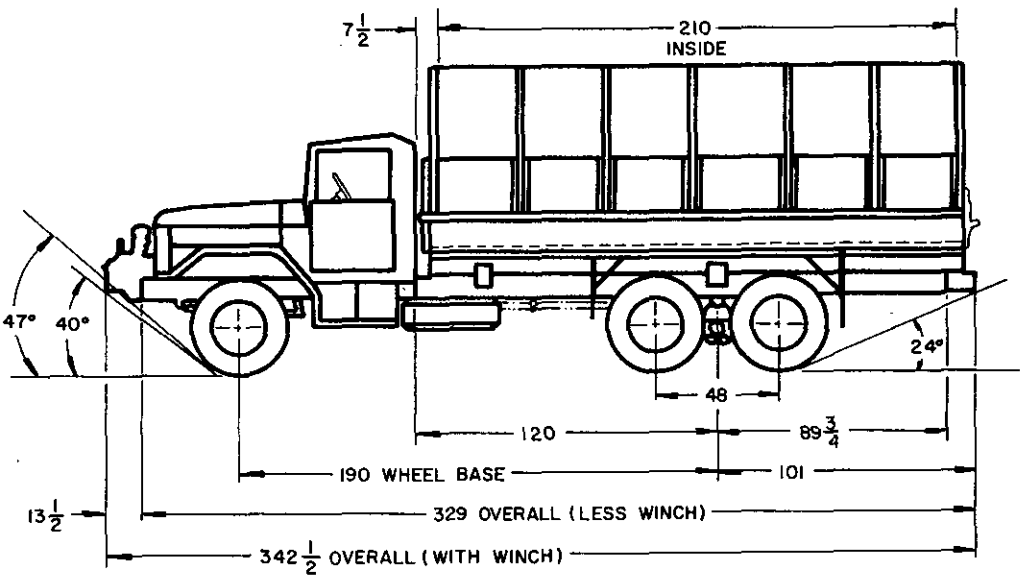

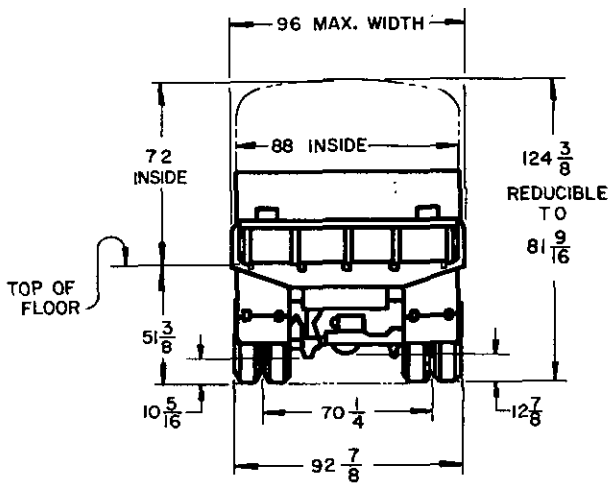


Ⓐ CANCELLED AFTER 25 FEBRUARY 1974
SUPERSEDED BY MS 500080

| MS PART NO. | DRAWING NO. | |
|---|---|---|
| MS 53072-1 | 8750400 | WITH WINCH |
| MS 53072-2 | 8750401 | LESS WINCH |

APPROVED 15 MAY 1964 REVISED Ⓐ 25 FEBRUARY 1974

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| P.A. MO (ATAC) | TITLE | MILITARY STANDARD |
|---|---|---|
| Other Cust<br>NAVY-MC | TRUCK, CARGO, 2-1/2 TON, 6X6<br>190 IN. WHEEL BASE, M36 | MS 53072 |
| PROCUREMENT SPECIFICATION<br>MIL-T-45362 | SUPERSEDES | SHEET 1 OF 2 |

Downloaded from: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS
2320

# VEHICLE CHARACTERISTICS

MODEL M36 CHASSIS M46C
CHASSIS PART NO. 8736158 W/WINCH MS 51393-1
CHASSIS PART NO. 8736149 LESS/W MS 51393-2

CURB WEIGHT: FULLY EQUIPPED LESS PAYLOAD AND PERSONNEL

| | WO/WINCH | W/WINCH |
|---|---|---|
| FRONT AXLE | 5580 | 6085 |
| REAR AXLE (BOGIE) | 7920 | 7830 |
| TOTAL | 13500 | 13915 |

WEIGHT DISTRIBUTION: LOADED WITHOUT CREW

| | CROSS COUNTRY | | HIGHWAY | |
|---|---|---|---|---|
| | WO/W | W/W | WO/W | W/W |
| PAYLOAD | 5000 | 5000 | 10000 | 10000 |
| FRONT AXLE | 5850 | 6355 | 6120 | 6625 |
| INTER AXLE | 6325 | 6280 | 8690 | 8645 |
| REAR AXLE | 6325 | 6280 | 8690 | 8645 |
| TOTAL-LBS. | 18500 | 18915 | 23500 | 23915 |

TOWED LOAD ALLOWANCE
LIMITED CROSS COUNTRY 6000 LBS.
HIGHWAY 10000 LBS.

SHIPPING DIMENSIONS

| | W/O WINCH | W/WINCH |
|---|---|---|
| CU. FT. | 1446 | 1553 |
| SQ. FT. | 220 | 228.5 |

BODY ASSY.
INSTALLATION: CARGO BODY PART NO. 8757819
CARGO BODY PART NO. 8757820
CAB ASSY. PART NO. 8757744

GENERAL
THIS VEHICLE IS USED TO TRANSPORT GENERAL CARGO OR PERSONNEL. THE CAB IS CANVAS COVERED, OPEN TYPE. THE BODY IS 17 1/2 FT. (210 X 88 IN. INSIDE) FLAT BED TYPE; STEEL CONSTRUCTION. SIDES AND TARPAULIN FRAMES ARE REMOVABLE 14 INCH SIDES, WITH RIGHT SIDE HINGED LONGITUDINALLY BELOW FLOOR. 16 INCH TAIL GATE 72 INCH FLOOR TO UNDERSIDE OF BOWS. COMPLETE WITH SIDE RACKS AND TARPS, TROOP SEATS NOT FURNISHED.

BODY CARGO SPACE 630 CU. FT.
BODY INCLUDES SEVEN TOP BOWS WITH TARPAULINS AND END FLAPS. STEP ON TAILGATE FOR EASE OF ENTRANCE. FOUR AMBER REFLECTORS, TWO ON FRONT ONE EACH SIDE FORWARD. FOUR RED REFLECTORS, TWO ON REAR ONE EACH SIDE REARWARD.

ENGINE 6 CYL. 331 CU. IN
COMP RATIO 6.73 TO 1 4 1/8 BORE 4 1/8 STROKE
BRAKE HP MAX. NET 127 @ 3400 RPM W/STD ACCESSORIES

FRONT SUSPENSION
FRONT AXLE INSTALL. PART NO. 8757839
SHOCK ABSORBERS PART NO. 7521734
SPRINGS, FRONT (2) PART NO. 7539007
(2) PART NO. 7368628

REAR SUSPENSION
REAR AXLE ASSY. INSTALL. PART NO. 8757834
SPRINGS, REAR (2) PART NO. 7368511
(2) PART NO. 7521792

WHEELS 7.5 X 20 (10) MS 53044-5

TIRES 900 - 20 (8) PLY (10) MS 35388-16
TREAD DESIGN NDCC TUBE (10) MS 35392-13
NUMBER OF SPARES - ONE

STEERING CAM AND TWIN LEVER PART NO. 8757840

BRAKES SERVICE
FRONT, HUB & DRUM ASSY. LH PART NO. 7529053
HUB & DRUM ASSY. RH PART NO. 7529054
REAR, HUB & DRUM ASSY. LH PART NO. 8757681
HUB & DRUM ASSY. RH PART NO. 8757682
DRUM SIZE - FRONT 15 X 3 REAR 15 X 3
ACTUATION - AIR/HYDRAULIC

BRAKES PARKING
DRUM SIZE - 14 X 3, MOUNTED ON REAR OUTPUT SHAFT OF TRANSFER

ELECTRICAL SYSTEM
WATERPROOF AND RADIO SUPPRESSED
POTENTIAL - 24 VOLTS
BATTERIES - (2) 6 TN 12 VOLT MS 35000-4

STOP LIGHT TAILLIGHT (2) MS 51329-1

STOP LIGHT BLACKOUT (1) MS 51302-1

PERFORMANCE MILES PER GALLON 7 TO 5
CRUISING RANGE, HIGHWAY 300 MILES
MAXIMUM SPEED 58 M.P.H. @ 3400 R.P.M.

WINCH CAPACITY 10000 LBS. MS 51352-1

PINTLE CAPACITY 40000 LBS. MS 51118-1

TIE DOWNS 14 (7) EACH SIDE

FORDING KIT PART NO. 5701839
FORDING DEPTH W/FORDING KIT 72 IN.
FORDING DEPTH WO/FORDING KIT 30 IN.

THIS VEHICLE IS DESIGNED IN TWO (2) MAJOR COMPONENTS, CHASSIS AND BODY. FOR DATA ON CHASSIS, SEE MS 51393, AND DRAWINGS 8736158, 8736149.

THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED DRAWINGS PART NO. 8750400 WITH WINCH PART NO. 8750401 WITHOUT WINCH. COPIES OF WHICH MAY BE OBTAINED FROM ARMY TANK-AUTOMOTIVE CENTER, DETROIT ARSENAL, WARREN, MICHIGAN, ATTN: STANDARDIZATION BRANCH.

REVIEW ACTIVITIES: ARMY - EL
USER ACTIVITIES: NAVY - DOCKS

APPROVED 15 MAY 1964 REVISED (A) FOR CHANGES SEE SHEET 1

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| | | |
|---|---|---|
| P.A. MO(ATAC)<br>Other Cust<br>NAVY-MC | TITLE<br>TRUCK, CARGO, 2-1/2 TON, 6X6<br>190 IN. WHEEL BASE, M36 | MILITARY STANDARD<br>MS 53072 |
| PROCUREMENT SPECIFICATION<br>MIL-T-45362 | SUPERSEDES: | SHEET 2 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21Z
Check the source to verify that this is the current version before use.