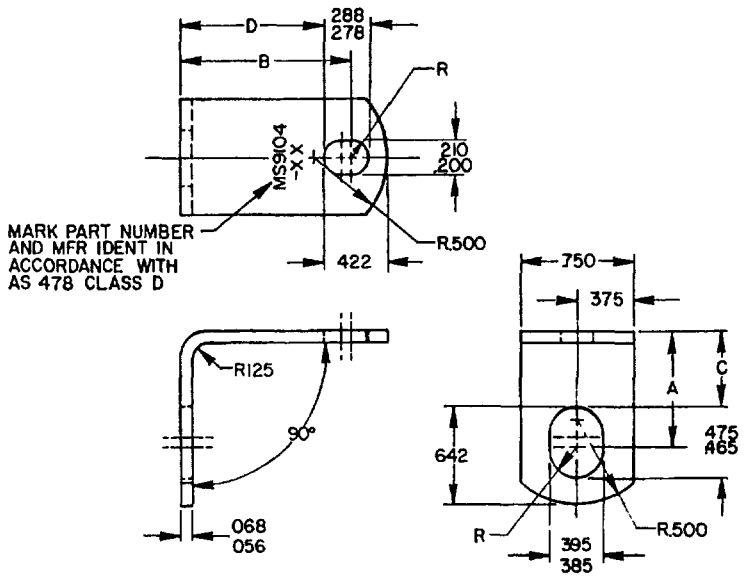



TABLE I. DASH NUMBERS AND DIMENSIONS

| DASH NO | A REF | B REF | C ±.010 | D ± 010 | APPROX WEIGHT LB/100 |
|---|---|---|---|---|---|
| -01 | .625 | 500 | 359 | 328 | 1.546 |
| -02 | .625 | .625 | 359 | 453 | 1.711 |
| -03 | 625 | .750 | .359 | 578 | 1 875 |
| -04 | 625 | 875 | .359 | 703 | 1 912 |
| -05 | 625 | 1.000 | .359 | 828 | 2 175 |
| -06 | 625 | 1 250 | .359 | 1.078 | 2 533 |
| -07 | 625 | 1.500 | .359 | 1 328 | 2 862 |
| -10 | 750 | .500 | .484 | 328 | 1 711 |
| -11 | .750 | .625 | 484 | .453 | 1.875 |
| -12 | .750 | .750 | 484 | 578 | 1 912 |
| -13 | 750 | 875 | .484 | .703 | 2.175 |
| -14 | 750 | 1.000 | 484 | 820 | 2 286 |
| -15 | .750 | 1.250 | 484 | 1 078 | 2 698 |
| -16 | 750 | 1 500 | 484 | 1 328 | 3 027 |
| -20 | .875 | .500 | .609 | 328 | 1 875 |
| -21 | 875 | 625 | 609 | 453 | 1 912 |
| -22 | 875 | .750 | 609 | 578 | 2.175 |
| -23 | 875 | 875 | 609 | 703 | 2.286 |
| -24 | 875 | 1.000 | 609 | .828 | 2 533 |
| -25 | .875 | 1.250 | 609 | 1.078 | 2 862 |
| -26 | 875 | 1 500 | 609 | 1.328 | 3 192 |
| -30 | 1 000 | 500 | 734 | 328 | 1 912 |
| -31 | 1.000 | 625 | 734 | .453 | 2 199 |
| -32 | 1 000 | 750 | 734 | 578 | 2 286 |
| -33 | 1 000 | .875 | .734 | 703 | 2 533 |
| -34 | 1.000 | 1.000 | 734 | 828 | 2 698 |
| -35 | 1 000 | 1 250 | 734 | 1 078 | 3 027 |
| -36 | 1.000 | 1 500 | 734 | 1 328 | 3.356 |

| DASH NO | A REF | B REF | C ±.010 | D ±.010 | APPROX WEIGHT LB/100 |
|---|---|---|---|---|---|
| -40 | 1 250 | 500 | .984 | 328 | 2.286 |
| -41 | 1.250 | .625 | .984 | 453 | 2.533 |
| -42 | 1 250 | 750 | .984 | .578 | 2.698 |
| -43 | 1.250 | 875 | 984 | 703 | 2 862 |
| -44 | 1 250 | 1.000 | 984 | 828 | 3.027 |
| -45 | 1 250 | 1.250 | .984 | 1 078 | 3 356 |
| -46 | 1 250 | 1.500 | 984 | 1.328 | 3.685 |
| -50 | 1 500 | 500 | 1 234 | 328 | 2 698 |
| -51 | 1 500 | 625 | 1.234 | .453 | 2.862 |
| -52 | 1 500 | .750 | 1 234 | .578 | 3.027 |
| -53 | 1.500 | 875 | 1.234 | .703 | 3 192 |
| -54 | 1 500 | 1 000 | 1.234 | .828 | 3.356 |
| -55 | 1.500 | 1.250 | 1.234 | 1.078 | 3.685 |
| -56 | 1 500 | 1.500 | 1 234 | 1 328 | 4.014 |
| -60 | 1 750 | 500 | 1.484 | .328 | 3.027 |
| -61 | 1.750 | 625 | 1.484 | 453 | 3.192 |
| -62 | 1.750 | 750 | 1.484 | .578 | 3 356 |
| -63 | 1 750 | 875 | 1 484 | .703 | 3 420 |
| -64 | 1 750 | 1 000 | 1 484 | .828 | 3 685 |
| -65 | 1.750 | 1.250 | 1 484 | 1 078 | 4.014 |
| -66 | 1 750 | 1 500 | 1 484 | 1 328 | 4.343 |
| -70 | 2 000 | 500 | 1 734 | 328 | 3 356 |
| -71 | 2 000 | 625 | 1 734 | 453 | 3 420 |
| -72 | 2 000 | 750 | 1 734 | 578 | 3 685 |
| -73 | 2 000 | .875 | 1 734 | .703 | 3.819 |
| -74 | 2 000 | 1 000 | 1 734 | 828 | 4.014 |
| -75 | 2.000 | 1.250 | 1 734 | 1.078 | 4 343 |
| -76 | 2.000 | 1.500 | 1.734 | 1 328 | 4 644 |

INACTIVE FOR DESIGN AFTER 22 NOVEMBER 1966. USE MS9595
INTERCHANGEABILITY RELATIONSHIP: MS9104 INDIVIDUAL PART NUMBERS MAY BE REPLACED BY ONE OR MORE PART NUMBERS OF MS9595 SELECTED WITHIN THE SLOTTED HOLE DIMENSIONAL RANGE OF THE SUPERSEDED STANDARD. THE INACTIVATED MS9104 PARTS SHALL NOT BE USED TO REPLACE THE SUPERSEDING MS9595 PARTS.

APPROVED 17 OCT 58 REVISED © 18 JUN 87

© ENTIRE STANDARD REVISED

| PA NAVY-AS | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| Other Cust ARMY-AR AIR FORCE-82 | | BRACKET, ANGLE, 90° .190 x .375 BOLT | MS9104 |
| PROCUREMENT SPECIFICATION NONE | SUPERSEDES | | PAGE 2 OF |

DD 672-1 COORDINATED 5340-1740

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited
This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable
REVIEWER ACTIVITIES DLA-IS
USER ACTIVITIES
AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:10Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

REQUIREMENTS:

1 MATERIAL. CORROSION RESISTANT STEEL IN ACCORDANCE WITH AMS 5510.

2. DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

3 TOLERANCES UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.015, ANGULAR DIMENSIONS ±2°

4 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE. MS9104-02

DASH NUMBER

BASIC MS NUMBER

MS9104-02 INDICATES - BRACKET, 90° ANGLE, LENGTH A, .625; LENGTH B, .625.

NOTES

1. ALL DIMENSIONS ARE IN INCHES

2. DO NOT USE UNASSIGNED DASH NUMBERS.

3 REMOVE BURRS AND BREAK SHARP EDGES

4. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

5. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION, FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

6. AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.

7 THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 17 OCT 58 REVISED © FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES

REVIEWER ACTIVITIES
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

| | | | |
|---|---|---|---|
| PA NAVY-AS<br>Other Cust<br>ARMY-AR<br>AIR FORCE-82 | INTERNATIONAL INTEREST | TITLE<br>BRACKET, ANGLE, 90°<br>.190 x .375 BOLT | MILITARY STANDARD<br>MS9104 |
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES | | PAGE 2 OF 2 |

DD FORM 1 MAY 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1740

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:10Z
Check the source to verify that this is the current version before use.