INCH-POUND

FED-STD-804
April 19, 1991
SUPERSEDING
PPP-P-1135B
September 28, 1984

FEDERAL STANDARD

PACKAGING OF DUCK FABRICS

(COTTON; SYNTHETIC FIBER; COTTON-SYNTHETIC FIBER BLENDS)

AMSC N/A

FSC PACK

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

1. This standard was approved by the Commissioner, Federal Supply Service General Services Administration, for the use of all Federal agencies.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5019 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

PARAGRAPH	CONTENTS	PAGE
1.	SCOPE	1
1.1	Scope	1
2.	REFERENCED DOCUMENTS	1
2.1	Government documents	1
2.2	Other publications	2
3.	DEFINITIONS	3
3.1	Terms	3
4.	GENERAL REQUIREMENTS	3
4.1	General	3
4.1.1	Material	3
4.1.2	Identification	3
4.2	Put-up	4
4.2.1	Level A put-up	4
4.2.2	Commercial put-up	4
4.3	Preservation	4
4.3.1	Level A preservation	4
4.3.1.1	Alternative level A preservation	4
4.3.2	Commercial preservation	5
4.4	Packing	5
4.4.1	Level A packing	5
4.4.1.1	Waterproofed barrier material	5
4.4.1.2	Bias-sewn tubing	6
4.4.1.3	Laminated tubing	6
4.4.2	Level B packing	6
4.4.3	Commercial packing	6
4.5	Marking	7
4.5.1	Unit packed rolls	7
5.	DETAILED REQUIREMENTS	7
5.1	Responsibility for inspection	7
5.1.1	Responsibility for compliance	7
5.1.2	Certificate of compliance	7
5.2	Quality conformance inspection	7
5.2.1	Component and material inspection	8
5.2.1.1	Component and material certification	8
5.2.2	Examination of the end item for put-up, preservation, packing, and marking	9

APPENDIX A

Appendix A	NOTES	11
10.	SCOPE	11
10.1	Scope	11
10.2	Acquisition requirements	11
10.3	Fire retardant materials	11

FIGURES

Figure 1	Piece ticket	12
Figure 2	Processing and wrapping of rolls	13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 Scope. This standard covers the put-up, preservation, packing, and marking of duck fabrics for shipment and storage.

2. REFERENCED DOCUMENTS

2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
V-T-276	-	Thread, Cotton
UU-P-268	-	Paper, Kraft, Wrapping
CCC-C-429	-	Cloth, Osnaburg, Cotton
CCC-C-467	-	Cloth, Burlap, Jute (or Kenaf)
PPP-T-45	-	Tape, Gummed, Paper Reinforced & Plain, For Sealing & Securing
PPP-T-60	-	Tape, Packaging, Waterproof

MILITARY

MIL-B-121	-	Barrier Material, Greaseproofed, Waterproofed, Flexible
MIL-T-40625	-	Tubing, Bias Sewn (Burlap or Osnaburg) Cloth

STANDARDS

FEDERAL

FED-STD-101	-	Test Procedures for Packaging Materials
FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stiches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

FEDERAL REGULATIONS

40CFR 1-427	-	Guidelines for Procurement of Products that Contain Recycled Materials
40CFR 1-250	-	Guidelines for Federal Procurement of Paper and Paper Products Containing Recovered Material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

(Copies of Code of Federal Regulations (CFR) can be obtained from Superintendent of Documents, U.S. Printing Office, Washington, DC 20402.)

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

(Single copies of this standard and other Federal Standards required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington DC, Atlanta, Chicago, Kansas City, Fort Worth, Denver, San Francisco, Los Angeles and Seattle.)

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Copies may be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

AMERICAN IRON AND STEEL INSTITUTE (AISI)

Type number 304 - Stainless and Heat Resistant Steel

Type number 316 - Stainless and Heat Resistant Steel

(Copies of Steel Product Manual may be obtained from the American Iron and Steel Institute, 150 East 42nd St., New York, NY 10017.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

TECHNICAL ASSOCIATION OF THE PULP AND PAPER INDUSTRY (TAPPI)

T404 - Tensile Breaking Strength and Elongation of Paper and Paperboard (Using Pendulum Type Tests)

T410 - Grainnage of Paper and Paper Board (Weight per Unit Area)

(Copies may be obtained from TAPPI, Technology Park/Atlanta, P.O. Box 105113, Atlanta, GA 30348-5113.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. DEFINITIONS

3.1 Terms. The terms used in this standard are commonly understood by the technical community to which they apply, and are not used here in such a way as to introduce new or limited meanings.

4. GENERAL REQUIREMENTS

4.1 General.

4.1.1 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this standard and 40CFR 1-247 and 250. When specified in the contract or purchase order, and material specifications offer options for fire retardant materials, the fire retardant class, type, grade or variety shall be used (see 10.3).

4.1.2 Indentification. Each roll shall have a piece ticket (identification tag) attached to the selvage with not finer than 5-ply cotton string doubled to not less than 8 inches long or a plastic tag hanger 5-inch minimum length. The piece ticket shall be made of not less than 15 point paper stock and the finished surface shall not be calendered or pigmented to the degree which would cause the obliteration of printed, stamped, or typed markings. The piece ticket shall have a reinforced eyelet for attaching the tying cord or hanger, and shall be legibly printed with water insoluble ink with the markings shown on figure 1. Entries on piece tickets (tags) shall be printed, stamped, or typed (see 10.2). The entries shall be complete and responsive with respect to the information required by the piece ticket legend (see figure 1). Hand lettered entries are permitted, but hand written entries are not permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

4.2 Put-up. Put-up shall be level A, or Commercial as specified (see 10.2).

4.2.1 Level A put-up. Fabrics shall be put-up in roll form only. Unless otherwise specified the weight of each roll shall not be less than 150 pounds nor more than 330 pounds (see 10.2). Unless otherwise specified in the material specification, more than one piece may be put-up on a roll. A piece shall be considered as a continuous length, free of splices. Fabrics shall be rolled open-width on a convolute or spiral-wound chipboard tube. The tube shall have an outer cover of kraft paper glued to the surface or an equivalent smooth finish surface that will prevent the fibers of the chipboard from transferring to the fabric. The tube shall have a minimum wall thickness of 0.1875 inch with a minimum inside diameter of 1.5 inches. The ends of the tube shall be flush with or extend not more than 1 inch beyond each side of the maximum width of the rolled fabric (see figure 2). Rolls of fabric shall be restrained from un-winding by securing the fabric with cloth tape, cotton tape, stainless steel (AISI type number 304 or number 316, see 2.2) pins, or tin or nickel plated brass pins, aluminum clips, or plastic fasteners. Rolls 36 inches or less in width shall be secured approximately 1/6 the distance from each end. Rolls exceeding 36 inches shall have an additional fastening at the center of the roll.

4.2.2 Commercial put-up. Fabrics shall be put-up on rolls in accordance with the industry's standard practice.

4.3 Preservation. Preservation shall be level A, or Commercial as specified (see 10.2).

4.3.1 Level A preservation. Each roll or fabric shall be wrapped with 60 pound minimum basis weight style 1 or 2 kraft paper conforming to grade B of A-A-203. The roll shall be wrapped so that the paper shall completely encircle the roll at least once with a minimum overlap of 3 inches, and the width of the paper shall be sufficient to fold over and protect the ends of the roll. Gummed paper tape, 2-1/2 inches minimum width conforming to type III, grade C of PPP-T-45, shall be applied on the overlap seam the full length of the roll, across each end, and extend along the side opposite the overlap seam 2-1/2 inches. Strips of tape shall be applied crosswise over the ends and shall extend a minimum of 2-1/2 inches along the length of the roll (see figure 2).

4.3.1.1 Alternative level A preservation.

a. Each roll of fabric shall be enclosed within a double-wall (2-ply) paper tube or bag fabricated of 50 pounds minimum basis weight kraft paper conforming to grade B of UU-P-268. The tube shall be of sufficient size to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

effect top and bottom closures specified herein. Bottom closure of the bag or tube shall be effected by folding 1-1/2 inches (single turnover) on one end and sewing approximately 3/4 inch from the bottom of the fold. The bag or tube bottom closure shall also be made by evenly folding a strip of paper tape over the open end and sewing through all walls of paper a minimum of 3/8 inch to a maximum of 3/4 inch from the bag end. The tape shall be a minimum of 2-1/8 inches wide made from creped or uncreped kraft paper having a minimum basis weight of 70 pounds and shall extend across the bag face to protrude not less than 1/2 inch beyond both edges of the bag. Sewing thread shall be ticket no. 12, 4-ply, type IA1 conforming to V-T-276. Stitching shall be spaced not less than 3 nor more than 6 stitches to the inch using a lock or chain stitch. Top closure shall be effected by folding over and securely sealing by the application of gummed paper tape 2-1/2 inches minimum width conforming to type III, grade C of PPP-T-45, 2-inch tape conforming to PPP-T-60, any type or class, or by sewing as specified for bottom closure (see figure 2),

or

b. Each roll of fabric shall be enclosed in a close-fitting polyethylene film tube with a minimum thickness of 0.004 inches. The tube shall be secured by heat-sealing, or by means of a mechanical tie (paper or plastic covered soft steel wire or aluminum band), or by plastic ties with a lock end.

4.3.2 Commercial preservation. Fabrics shall be preserved in accordance with ASTM D 3951.

4.4 Packing. Packing shall be level A, B, or Commercial as specified (see 10.2).

4.4.1 Level A packing. Rolls of fabric, preserved as specified, shall be overwrapped with waterproof barrier material as specified in 4.4.1.1 and packed in bias sewn tubing as specified in 4.4.1.2; or shall only be packed in laminated tubing as specified in 4.4.1.3.

4.4.1.1 Waterproof barrier material. The rolls of fabric shall be over-wrapped with one of the following waterproofed barrier materials:

(a) Type I, grade A, class 1, of MIL-B-121.

(b) Barrier material with outside portion of the liner made from kraft paper, having a basis weight of not less than 60 pounds per ream (24 by 36-500) creped in one direction, with not less than 7 percent minimum stretch. The inside portion of the kraft paper shall be coated with

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

polyethylene not less than 1-1/2 mils (22-1/2 pounds per ream) in thickness. The coating shall be uniformly applied to the kraft paper and shall be free from defects that may impair the function of the barrier material. All seams and joints of the overwrap shall be sealed with a minimum 2-inch wide tape, conforming to type IV, class 1 of PPP-T-60.

4.4.1.2 Bias-sewn tubing. Bias-sewn tubing shall be made from cotton osnaburg cloth conforming to class 2 of CCC-C-429, jute (or kenaf) burlap cloth conforming to class 3 of CCC-C-467, or woven polypropylene fabric. Cotton osnaburg or burlap tubing shall conform to MIL-T-40625. Woven polypropylene tubing shall be made from minimum 2.1 ounces per square yard material and shall conform to the following requirements. Tensile breaking strength of the fabric shall be 90 pounds minimum in the warp direction and 70 pounds minimum in the filling direction. The fabric shall retain 70 percent of the original minimum tensile breaking strength in each direction after 150 hours exposure to ultraviolet light. The tubing shall have a continuous sewn side seam. Fabric edges not incorporated into a seam shall be finished by a selvage, a heat seal, or a heat cut to prevent unravelling. Stitching shall be straight and continuous. Ends of stitches shall be effectively secured. Seams formed at fabric edges which are not selvaged shall be compound seams conforming to type EFb-1, SSn-1, or SSae-2 of FED-STD-751. Alternatively, the cotton burlap, or polypropylene fabric tubing may be in bag form with one end presewn. Each open end of the tubing or bag shall be closed with two wire ties. At leat 5 inches of surplus wrapping, measured from the center of the roll base, shall be gathered together with the first wire tie applied as close to the base of the roll as possible. The second wire tie shall be applied approximately 1 inch from the first wire tie with the twisted ends positioned opposite the ends of the first wire tie. Wire ties shall be not less than 6 inches long, 0.072-inch thick galvanized soft iron or steel wire with a 1/2-inch diameter formed eye at each end.

4.4.1.3 Laminated tubing (laminated tubing fabricated from 10 ounce burlap laminated to kraft paper coated with polyethylene). The burlap shall be continuously and uniformly laminated to the kraft paper with an average of not less than 60 pounds of asphaltum per ream (24 by 36-500). The kraft paper shall have a minimum basis weight of 40 pounds per ream (24 by 36-500), and the polyethylene coating shall have a minimum basis weight of 20 pounds per ream (24 by 36-500). The tubing shall be formed from one piece of material folded, and the superimposed edges stitch-seamed with a single row of stitches. Prior to stitch seaming, the superimposed edges shall be folded back over the body or the material approximately 3/4 inch. The sewing line shall be indented approxi-mately 3/8 inch from the edge of the tubing. The thread for seaming the tubing shall be type IA1 conforming to V-T-276.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

Needle thread shall be ticket no. 12, 4-ply, and looper thread shall be ticket no. 16, 4-ply. Stitching shall be spaced not less than 3 nor more than 6 stitches to the inch. Tubing shall be closed as specified in 4.4.1.2.

4.4.2 Level B packing. Rolls of fabric, preserved as specified, shall be packed only in bias sewn tubing or bag form wrapping with wire-tie closure, as specified in 4.4.1.2.

4.4.3 Commercial packing. Fabrics, preserved as specified, shall be packed in accordance with ASTM D 3951.

4.5 Marking. In addition to any special marking required by the contract or purchase order, shipping containers shall be marked in accordance with MIL-STD-129, FED-STD-123, or ASTM D 3951, as applicable.

4.5.1 Unit packed rolls. Each wrapped or overwrapped roll shall be clearly marked on the wrapping at the end where the identification tag is attached, as follows:

"TAG HERE"

Each roll shall be marked "DO NOT STAND ON END" in minimum 1-inch letters. Each roll shall be marked "USE NO HOOKS" in minimum 1-1/2 inch letters and with the corresponding symbol as cited in MIL-STD-129.

5. DETAILED REQUIREMENTS

5.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government.

The Government reserves the right to perform any of the inspections set forth in this standard where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

5.1.1 Responsibility for compliance. All items shall meet all requirements of section 4. The inspection set forth in this standard shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the standard shall not relieve the contractor of the responsibility of ensuring that all

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

5.1.2 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

5.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

5.2.1 Component and material inspection. In accordance with 5.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this standard or applicable purchase document.

5.2.1.1 Component and material certification. Components and materials listed below shall be accepted on the basis of a contractor's certification of compliance with the indicated requirements:

Characteristic	Requirement paragraph	Test method
Kraft paper:		
Basis weight of kraft paper	4.3.1	TAPPI T 410
Barrier material:		
Basis weight of kraft paper	4.4.1.1	TAPPI T 410
Stretch of creped kraft paper	4.4.1.1	TAPPI T 404
Basis weight of polyethylene	4.4.1.1	Method 1003 1/
Polypropylene tubing (when used):		
Material identification	4.4.1.2	Laboratory analysis
Weight	4.4.1.2	Method 5041 2/
Breaking strength	4.4.1.2	Method 5100 2/
Ultraviolet light resistance	4.4.1.2	Method 5804 2/
Edge finish	4.4.1.2	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

Characteristic	Requirement paragraph	Test method
Laminated tubing:		
Asphaltum weight per ream	4.4.1.3	
Basis weight of kraft paper	4.4.1.3	TAPPI T 410
Polyethylene coating basis weight	4.4.1.3	
Burlap weight	4.4.1.3	Method 5040 2/

1/ FED-STD-101.

2/ FED-STD-191.

5.2.2 Examination of the end item for put-up, preservation, packing, and marking. The preserved, packed and marked products shall be inspected for conformance in accordance with the material specification or contract. When the material specification does not contain inspection provisions for the packaging, the following shall apply: An examination shall be made to determine compliance with the put-up, preservation, packing, and marking requirements of this standard. Defects shall be scored in accordance with the list below. The sample unit shall be one roll fully packaged. The lot size shall be the number of rolls in the inspection lot. The inspection level shall be S-2 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defects
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application Roll wrap marking area not prepared as specified Bar code marking not machine readable
Materials	Any component missing, damaged, or not as specified Fire retardant materials, when specified, not used
Piece ticket (identification tag)	Missing

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

Workmanship	Inadequate application of components, such as paper, barrier material, cloth or polypropylene fabric and laminated tubing, incomplete closure or roll, inadequate securing or sealing of wrapping materials, insecure sewing, or loose wire ties
Weight	Weight not as specified (see 4.2.1)
Seams of bias-sewn tubing wrapping	Not type specified Stitching not as specified
Put-up	Weight of roll less than 150 pounds or more than 330 pounds

MILITARY INTERESTS:

Custodians

Army - GL
Navy - SA
Air Force - 99

Review activities

Army - MD, SM
Navy - AS, NU
Air Force - 82, 84
DLA - GS, CT

User activities

Navy - CG, MC

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS

VA - OSS

PREPARING ACTIVITY:

Army - GL

(Project PACK 0941)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

APPENDIX A

NOTES

10.1 Scope. This appendix is intended only for information and is not a mandatory part of this standard.

10.2 Acquisition requirements. Purchasers should select the preferred options permitted in section 4 and include the following information:

a. Levels of put-up, preservation, and packing (see 4.2, 4.3, and 4.4).
b. Information required on the piece ticket (identification tag, see 4.1.2).
c. When weights exceeding 330 pounds per roll are permitted (see 4.2.1).

10.3 Fire retardant materials. Fire retardant packaging materials are intended to reduce the risks and hazards of fire aboard ships and improve fleet readiness by reducing loses due to fire destruction in compliance with the Navy Passive Fire Protection Program (see 4.1.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

(FRONT SIDE)

PROCUREMENT AGENCY	
NATIONAL STOCK NUMBER	
ITEM	WIDTH
CONTRACTOR	
FINISHING MILL *	
FIBER CONTENT	
CONTRACT/ORDER NUMBER AND DATE	
SPECIFICATION NUMBER	ROLL NUMBER
REGULAR ☐ SHORT ☐ LENGTH PIECES	LOT NO.
TOTAL YARDAGE TURN TO REVERSE SIDE	

* GREIGE MILL WHEN PURCHASE IS FOR GREIGE CLOTH

(REVERSE SIDE)

PIECE NO. ** YARDS

1 _____ _____

2 _____ _____

3 _____ _____

(LIST PIECE NUMBERS IN ORDER ROLLED, FROM THE TUBE OUT)

	YARDS REMOVED	NEW TOTAL LENGTH
Place Bar Code in this Space		

** PRINTING OPTIONAL FOR SINGLE - PIECE ROLLS.

FIG 1 PIECE TICKET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

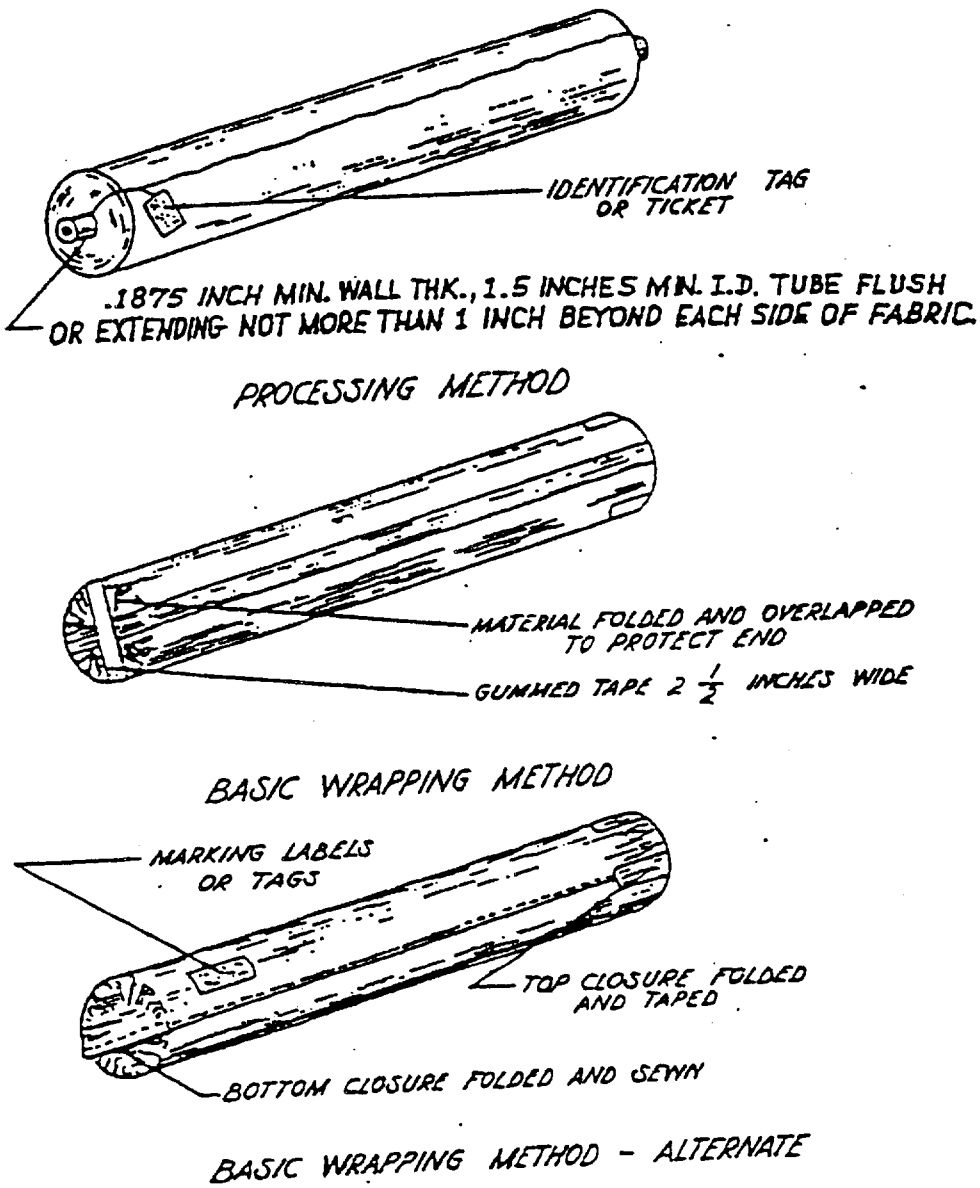


Figure 2. Processing and wrapping of rolls.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	FED-STD-804	1991 April 19

3. DOCUMENT TITLE
PACKAGING OF DUCK FABRICS (COTTON; SYNTHETIC FIBER; COTTON-SYNTHETIC FIBER BLENDS)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)
	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)
U.S. Army Natick RD&E Center	(1) Commercial: 508-651-4532 (2) AUTOVON/DSN: 256-4532
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: STRNC-IRT Natick, MA 01760-5019	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:02Z
Check the source to verify that this is the current version before use.