INCH POUND


FF-B-187/1
10 SEPTEMBER 1993

FEDERAL SPECIFICATION SHEET

BEARING, ROLLER, TAPERED, SINGLE ROW, NORMAL ANGLE (TYPE TS)

This specification is approved by the Administrator, Federal Supply Service, General Services Administration. for the use of all Federal Agencies.

The complete requirements for procuring the bearings described herein. shall consist of this document and the latest issue of FF-B-187/GEN.

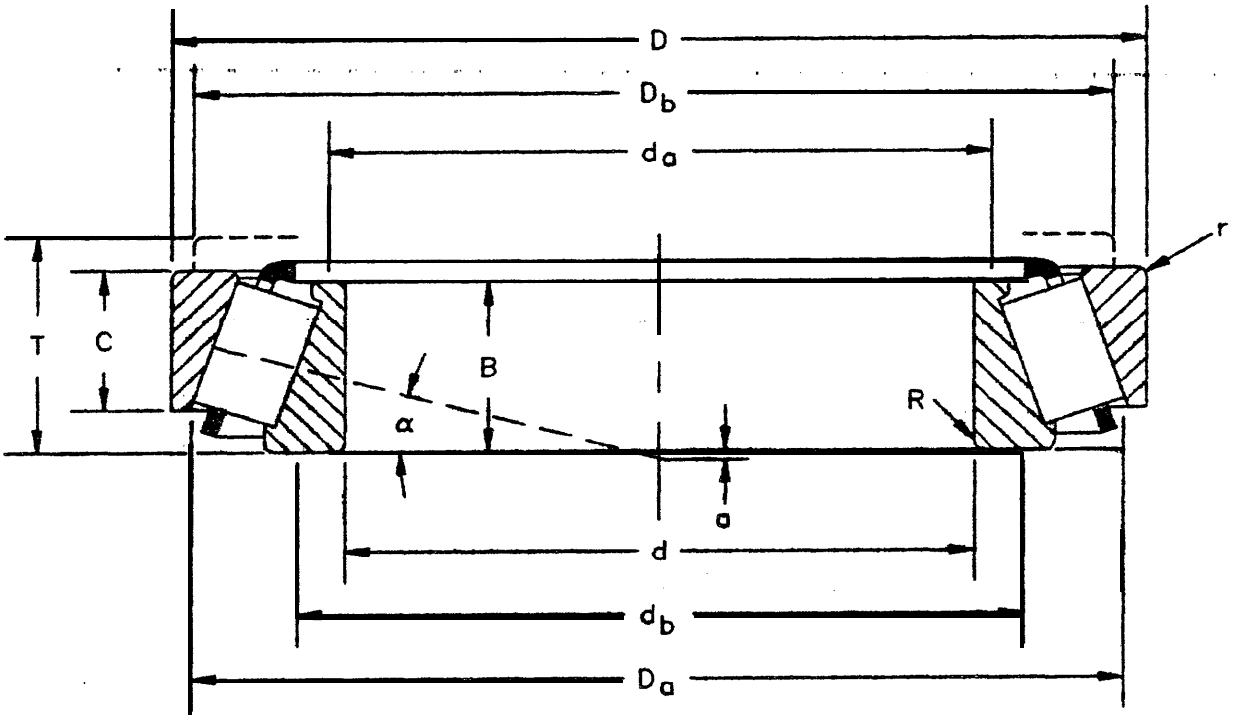

BEARING CONFIGURATION

AMSC N/A

FSC 3110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									db SHAFT	da SHAFT	Db HOUSING	Da HOUSING			
001	A2037-A2126	0.3750	1.2595	0.3940	0.4246	0.3125	0.05	0.05	0.59	0.53	1.02	1.14	1.44	1900	-0.12
002	A4050-A4138	0.5000	1.3775	0.4330	0.4326	0.3437	0.05	0.05	0.73	0.67	1.14	1.26	1.29	2100	-0.10
003	00050-00150	0.5000	1.5000	0.5313	0.5540	0.4375	0.06	0.06	0.75	0.65	1.30	1.34	2.12	3400	-0.20
004	L21549-L21511	0.6250	1.3775	0.4330	0.4330	0.3430	0.05	0.05	0.85	0.77	1.14	1.28	1.83	2500	-0.13
005	A6062-A6157	0.6250	1.5745	0.4730	0.4391	0.3750	0.05	0.05	0.87	0.81	1.34	1.46	1.11	2200	-0.06
006	A6062-A6162	0.6250	1.6250	0.4687	0.4391	0.3437	0.05	0.05	0.87	0.81	1.36	1.46	1.11	2200	-0.06
007	03062-03162	0.6250	1.6250	0.5625	0.5780	0.4375	0.05	0.08	0.85	0.79	1.34	1.48	1.88	3900	-0.20
008	17580-17520	0.6250	1.6875	0.6563	0.6563	0.5313	0.06	0.06	0.91	0.83	1.44	1.54	1.76	5100	-0.23
009	05062-05185	0.6250	1.8504	0.5662	0.5662	0.4375	0.06	0.05	0.93	0.83	1.59	1.67	1.64	4400	-0.16
010 *	09062-09195	0.6250	1.9380	0.7813	0.8480	0.5625	0.03	0.05	0.87	0.85	1.65	1.75	2.20	6900	-0.36
011	LM11749-LM11710	0.6875	1.5700	0.5450	0.5750	0.4200	0.05	0.05	0.91	0.85	1.34	1.46	2.04	4000	-0.20
012	A6075-A6157	0.7500	1.5745	0.4730	0.4391	0.3750	0.04	0.05	0.94	0.91	1.34	1.46	1.11	2200	-0.06
013	A6075-A6162	0.7500	1.6250	0.4687	0.4391	0.3437	0.04	0.05	0.94	0.91	1.36	1.46	1.11	2200	-0.06
014 *	4A-6	0.7500	1.7500	0.5000	0.4688	0.3750	0.06	0.06	1.00	0.93	1.50	1.16	1.22	3500	-0.07
015	LM11949-LM11910	0.7500	1.7810	0.6100	0.6550	0.4750	0.05	0.05	0.98	0.93	1.56	1.63	1.94	5400	-0.22
016	05075-05185	0.7500	1.8504	0.5662	0.5662	0.4375	0.05	0.05	0.98	0.93	1.59	1.67	1.64	4400	-0.16
017	09067-09195	0.7500	1.9380	0.7100	0.7500	0.5625	0.05	0.05	1.00	0.94	1.65	1.75	2.20	6900	-0.29
018	09074-09195	0.7500	1.9380	0.7813	0.8480	0.5625	0.06	0.05	1.02	0.94	1.65	1.75	2.20	6900	-0.36
019	09074-09194	0.7500	1.9380	0.9063	0.8480	0.6875	0.06	0.14	1.02	0.94	1.54	1.75	2.20	6900	-0.36
020	09078-09195	0.7500	1.9380	0.7813	0.8480	0.5625	0.05	0.05	1.00	0.94	1.65	1.75	2.20	6900	-0.36
021	09067-09194	0.7500	1.9380	0.8350	0.7500	0.6875	0.05	0.14	1.00	0.94	1.54	1.75	2.20	6900	-0.29

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE--CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	db	da	Db	Da	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									RECOMMENDED SHOULDER DIAMETER						
									SHAFT		HOUSING				
022	09067-09196	0.7500	1.9380	0.8350	0.7500	0.6875	0.05	0.06	1.00	0.94	1.63	1.75	2.20	6900	-0.29
023 *	1775-1729	0.7500	2.2400	0.7625	0.7810	0.6250	0.08	0.05	1.06	0.98	1.93	2.01	1.90	7300	-0.27
024	12580-12520	0.8125	1.9380	0.7813	0.7813	0.6250	0.06	0.06	1.12	1.02	1.67	1.79	1.81	7000	-0.28
025	M12649-M12610	0.8437	1.9687	0.6900	0.7200	0.5500	0.05	0.05	1.14	1.00	1.73	1.81	2.10	7200	-0.25
026	LL52549-LL52510	0.8750	1.6563	0.4400	0.4400	0.3400	0.05	0.05	1.08	1.02	1.44	1.56	1.47	2700	-0.07
027	07807-07196	0.8750	1.9687	0.5313	0.5614	0.3750	0.05	0.04	1.12	1.06	1.75	1.85	1.45	4800	-0.11
028	M12648-M12610	0.8750	1.9687	0.6900	0.7200	0.5500	0.05	0.05	1.12	1.04	1.73	1.81	2.10	7200	-0.25
029	1380-1328	0.8750	2.0625	0.7625	0.7940	0.5625	0.06	0.06	1.16	1.06	1.77	1.91	2.00	7800	-0.30
030	1380-1329	0.8750	2.1250	0.7625	0.7940	0.5625	0.06	0.06	1.16	1.06	1.81	1.93	2.00	7800	-0.30
031	1755-1729	0.8750	2.2400	0.7625	0.7810	0.6250	0.05	0.05	1.14	1.08	1.93	2.01	1.90	7300	-0.27
032	1280-1220	0.8750	2.2500	0.0750	0.8750	0.6875	0.03	0.06	1.16	1.14	1.93	2.05	1.69	8900	-0.27
033	1975-1932	0.8750	2.3125	0.7500	0.7820	0.5937	0.03	0.05	1.14	1.10	2.05	2.13	1.77	7800	-0.23
034	2684-2631	0.8750	2.6150	0.9375	1.0013	0.7500	0.08	0.05	1.24	1.14	2.28	2.36	2.30	12400	-0.37
035	07093-07196	0.9375	1.9687	0.5313	0.5614	0.3750	0.06	0.04	1.20	1.12	1.75	1.85	1.45	4800	-0.11
036	L44640-L44610	0.9375	1.9800	0.5600	0.5800	0.4200	0.06	0.05	1.20	1.12	1.75	1.85	1.56	4900	-0.13
037	1779-1729	0.9375	2.2400	0.7625	0.7810	0.6250	0.03	0.05	1.16	1.12	1.93	2.01	1.90	7300	-0.27
038	3659-3620	0.9375	2.4375	1.1250	1.1975	0.9375	0.09	0.13	1.40	1.24	2.05	2.27	2.07	14200	-0.47
039	07100-07196	1.0000	1.9687	0.5313	0.5614	0.3750	0.04	0.04	1.20	1.16	1.75	1.85	1.45	4800	-0.11

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									db SHAFT	da SHAFT	Db HOUSING	Da HOUSING			
040	07100-S-07196	1.0000	1.9687	0.5313	0.5614	0.3750	0.06	0.04	1.24	1.16	1.75	1.85	1.45	4800	-0.11
041	L44642-L44610	1.0000	1.9800	0.5600	0.5800	0.4200	0.14	0.05	1.42	1.16	1.75	1.85	1.56	4900	-0.13
042	L44643-L44610	1.0000	1.9800	0.5600	0.5800	0.4200	0.05	0.05	1.24	1.16	1.75	1.85	1.56	4900	-0.13
043	07100-07204	1.0000	2.0470	0.5910	0.5614	0.5000	0.04	0.05	1.20	1.16	1.77	1.89	1.45	4800	-0.11
044	1780-1729	1.0000	2.2490	0.7625	0.7810	0.6250	0.03	0.05	1.20	1.18	1.93	2.01	1.90	7300	-0.27
045	M84548-M84510	1.0000	2.6500	0.7650	0.7650	0.5800	0.06	0.06	1.42	1.30	1.91	2.13	1.07	7900	-0.12
046	1986-1932	1.0000	2.3125	0.7500	0.7820	0.5937	0.05	0.05	1.28	1.20	2.05	2.13	1.77	7800	-0.23
047	M84249-M84210	1.0000	2.3437	0.9200	0.9100	0.7200	0.03	0.06	1.42	1.27	1.95	2.20	1.07	9300	-0.20
048	15578-15523	1.0000	2.3750	0.7812	0.6875	0.6250	0.05	0.06	1.28	1.20	2.01	2.13	1.69	7500	-0.20
049	15101-15243	1.0000	2.4375	0.7500	0.8125	0.5625	0.03	0.06	1.28	1.24	2.13	2.28	1.67	8200	-0.23
050	15100-15245	1.0000	2.4409	0.7500	0.8125	0.5625	0.14	0.05	1.50	1.24	2.17	2.28	1.67	8200	-0.23
051	15101-15245	1.0000	2.4409	0.7500	0.8125	0.5625	0.03	0.05	1.28	1.24	2.17	2.28	1.67	8200	-0.23
052	15102-15245	1.0000	2.4409	0.7500	0.8125	0.5625	0.06	0.05	1.34	1.24	2.17	2.28	1.67	8200	-0.23
053	15101-15244	1.0000	2.4409	0.8125	0.8125	0.6250	0.03	0.05	1.28	1.24	2.17	2.28	1.67	8200	-0.23
054	15101-15250	1.0000	2.5000	0.8125	0.8125	0.6250	0.03	0.05	1.28	1.24	2.20	2.32	1.67	8200	-0.23
055	15101-15250X	1.0000	2.5000	0.8125	0.8125	0.6250	0.03	0.06	1.28	1.24	2.17	2.32	1.67	8200	-0.23
056	M86643-M86610	1.0000	2.5312	0.8438	0.8438	0.6563	0.06	0.06	1.50	1.44	2.13	2.40	1.07	9700	-0.13
057	2687-2631	1.0000	2.6150	0.9375	1.0013	0.7500	0.05	0.05	1.32	1.24	2.28	2.36	2.30	12400	-0.37
058	02473-02420	1.0000	2.6875	0.8750	0.8750	0.6875	0.03	0.06	1.36	1.32	2.32	2.48	1.40	10400	-0.20

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER db SHAFT	RECOMMENDED SHOULDER DIAMETER da SHAFT	RECOMMENDED SHOULDER DIAMETER Db HOUSING	RECOMMENDED SHOULDER DIAMETER Da HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
059	HM88630-HM88610	1.0000	2.8438	1.0000	1.0000	0.7812	0.03	0.09	1.56	1.56	2.36	2.72	1.07	12300	-0.18
060 *	3189-3120	1.0000	2.8593	1.1875	1.1810	0.9375	0.03	0.13	1.40	1.38	2.40	2.64	1.76	15200	-0.40
061	L44649-L44610	1.0625	1.9800	0.5600	0.5600	0.4200	0.14	0.05	1.48	1.22	1.75	1.85	1.56	4900	-0.13
062	15580-15523	1.0625	2.3750	0.7812	0.6875	0.6250	0.14	0.06	1.52	1.26	2.01	2.13	1.69	7500	-0.20
063	15106-15245	1.0625	2.4409	0.7500	0.8125	0.5625	0.03	0.05	1.32	1.30	2.17	2.28	1.67	8200	-0.23
064	2688-2631	1.0625	2.6150	0.9375	1.0013	0.7500	0.06	0.05	1.38	1.30	2.28	2.36	2.30	12400	-0.37
065	1985-1930	1.1250	2.2400	0.7813	0.7620	0.6250	0.03	0.03	1.34	1.32	2.01	2.11	1.77	7800	-0.23
066	15590-15520	1.1250	2.2500	0.6875	0.6875	0.5313	0.14	0.06	1.56	1.32	2.01	2.09	1.69	7500	-0.20
067	1985-1932	1.1250	2.3125	0.7500	0.7620	0.5937	0.03	0.05	1.34	1.32	2.05	2.13	1.77	7800	-0.23
068	1988-1932	1.1250	2.3125	0.7500	0.7620	0.5937	0.14	0.05	1.56	1.32	2.05	2.13	1.77	7800	-0.23
069	15590-15523	1.1250	2.3750	0.7812	0.6875	0.6250	0.14	0.06	1.56	1.32	2.01	2.13	1.69	7500	-0.20
070	1985-1931	1.1250	2.3750	0.7813	0.7620	0.6250	0.03	0.05	1.34	1.32	2.05	2.17	1.77	7800	-0.23
071 *	15113-15243	1.1250	2.4375	0.7500	0.8125	0.5625	0.03	0.08	1.36	1.34	2.13	2.28	1.67	8200	-0.23
072	15113-15245	1.1250	2.4409	0.7500	0.8125	0.5625	0.03	0.05	1.36	1.34	2.11	2.28	1.67	8200	-0.23
073	15112-15245	1.1250	2.4409	0.7500	0.8125	0.5625	0.14	0.05	1.57	1.34	2.17	2.28	1.67	8200	-0.23
074	M86647-M86610	1.1250	2.5312	0.8438	0.8438	0.6563	0.06	0.06	1.57	1.50	2.13	2.40	1.07	9700	-0.13
075	2689-2631	1.1250	2.6150	0.9375	1.0013	0.7500	0.05	0.05	1.42	1.34	2.28	2.36	2.30	12400	-0.37
076	2474-2420	1.1250	2.6875	0.8750	0.9375	0.6875	0.03	0.06	1.42	1.38	2.36	2.48	1.72	10900	-0.26
077	02474-02420	1.1250	2.6875	0.8750	0.8750	0.6875	0.03	0.06	1.44	1.42	2.32	2.48	1.40	10400	-0.20
078	2578-2523	1.1250	2.7500	0.9375	0.9963	0.7500	0.09	0.05	1.54	1.38	2.40	2.52	2.14	13500	-0.34
079	26112-26283	1.1250	2.8346	0.7480	0.7450	0.6250	0.06	0.06	1.46	1.38	2.44	2.56	1.62	9500	-0.16
080	26112-26283-S	1.1250	2.8346	0.7480	0.7450	0.6250	0.06	0.08	1.46	1.38	2.44	2.56	1.62	9500	-0.16
081	3192-3120	1.1250	2.8593	1.1875	1.1810	0.9375	0.14	0.13	1.71	1.46	2.40	2.64	1.76	15200	-0.40

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 20260-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE–CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									SHAFT		HOUSING				
									db	da	Db	Da			
082	3198–3120	1.1250	2.8593	1.1875	1.1810	0.9375	0.05	0.13	1.54	1.46	2.40	2.64	1.76	15200	–0.40
083	3198–3130	1.1250	2.8593	1.1875	1.1810	0.9375	0.05	0.03	1.54	1.46	2.48	2.64	1.76	15200	–0.40
084	02872–02820	1.1250	2.8750	0.8750	0.8750	0.6875	0.03	0.13	1.48	1.46	2.44	2.68	1.29	10600	–0.15
085 *	17119–17244	1.1875	2.4409	0.6300	0.6522	0.5625	0.06	0.06	1.46	1.36	2.13	2.24	1.53	7000	–0.14
086	M86649–M86610	1.1875	2.5312	0.8438	0.8438	0.6563	0.06	0.06	1.61	1.50	2.13	2.40	1.07	9700	–0.13
087	2558–2523	1.1875	2.7500	0.9375	0.9983	0.7500	0.09	0.05	1.57	1.44	2.40	2.52	2.14	13500	–0.34
088	3187–3120	1.1875	2.8593	1.1875	1.1810	0.9375	0.03	0.13	1.54	1.52	2.40	2.64	1.76	15200	–0.40
089	08125–08231	1.2500	2.3125	0.5781	0.5937	0.4219	0.04	0.04	1.48	1.42	2.05	2.17	1.23	5200	–0.05
090	LM67048–LM67010	1.2500	2.3280	0.6250	0.6600	0.4650	SPCL	0.05	1.67	1.42	2.05	2.20	1.42	6400	–0.12
091	15123–15245	1.2500	2.4409	0.7150	0.7500	0.5625	SPCL	0.05	1.67	1.44	2.17	2.28	1.67	8200	–0.19
092	15125–15245	1.2500	2.4409	0.7500	0.8125	0.5625	0.14	0.05	1.67	1.44	2.17	2.28	1.67	8200	–0.23
093	15126–15245	1.2500	2.4409	0.7500	0.8125	0.5625	0.03	0.05	1.46	1.44	2.17	2.28	1.67	8200	–0.23
094	2580–2520	1.2500	2.6150	1.0000	0.9983	0.8125	0.03	0.13	1.52	1.48	2.24	2.46	2.14	13500	–0.34
095	02475–02420	1.2500	2.6875	0.8750	0.8750	0.6875	0.14	0.06	1.75	1.52	2.32	2.48	1.40	10400	–0.20
096 *	02476–02421	1.2500	2.6875	0.8750	0.8750	0.6875	0.03	0.03	1.54	1.52	2.32	2.48	1.40	10400	–0.02
097	02476–02420	1.2500	2.6875	0.8750	0.8750	0.6875	0.03	0.06	1.54	1.52	2.32	2.48	1.40	10400	–0.20
098	23491–23420	1.2500	2.6875	1.0625	1.0625	0.8750	0.06	0.06	1.61	1.54	2.32	2.52	1.66	12900	–0.34
099	14124–14276	1.2500	2.7170	0.7813	0.7710	0.6250	0.03	0.05	1.52	1.48	2.36	2.48	1.53	8800	–0.17
100 *	14125A–14276	1.2500	2.7170	0.7813	0.7710	0.6250	0.14	0.05	1.73	1.48	2.36	2.48	1.53	8800	–0.17
101	2580–2523	1.2500	2.7500	0.9375	0.9983	0.7500	0.03	0.05	1.52	1.48	2.40	2.52	2.14	13500	–0.34
102 *	3188–3130	1.2500	2.8593	1.1875	1.1810	0.9375	0.03	0.03	1.57	1.56	2.48	2.64	1.76	15200	–0.40
103 *	HM88542–HM88510	1.2500	2.8750	1.1563	1.0938	0.9063	0.05	0.13	1.79	1.68	2.32	2.76	1.07	14000	–0.22

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									SHAFT		HOUSING				
									db	da	Db	Da			
104	2580-2523-S	1.2500	2.7500	0.9375	0.9983	0.7500	0.03	0.06	1.52	1.48	2.40	2.48	2.14	13500	-0.34
105	2582-2523	1.2500	2.7500	0.9375	0.9983	0.7500	0.14	0.05	1.73	1.48	2.40	2.52	2.14	13500	-0.34
106 *	3188-3120	1.2500	2.8593	1.1875	1.1810	0.9375	0.03	0.13	1.57	1.56	2.40	2.64	1.76	15200	-0.40
107	3193-3120	1.2500	2.8593	1.1875	1.1810	0.9375	0.14	0.13	1.79	1.56	2.40	2.64	1.76	15200	-0.40
108	2879-2820	1.2500	2.8750	0.8750	0.9375	0.6875	0.03	0.13	1.56	1.52	2.48	2.68	1.59	11900	-0.22
109	02875-02820	1.2500	2.8750	0.8750	0.8750	0.6875	0.14	0.13	1.79	1.56	2.44	2.68	1.29	10600	-0.15
110	02876-02820	1.2500	2.8750	0.8750	0.8750	0.6875	0.03	0.13	1.57	1.56	2.44	2.68	1.29	10600	-0.15
111 *	HM88542-HM88510	1.2500	2.8750	1.1563	1.0938	0.9063	0.05	0.13	1.79	1.68	2.32	2.76	1.07	14000	-0.22
112	HM88542-HM88511	1.2500	2.8750	1.1563	1.0938	0.9063	0.05	0.03	1.79	1.68	2.44	2.76	1.07	14000	-0.22
113	HM88542-HM88512	1.2500	2.9060	1.1563	1.0938	0.9063	0.05	0.13	1.79	1.68	2.36	2.76	1.07	14000	-0.22
114	HM89440-HM89410	1.2500	3.000	1.1563	1.1250	0.9063	0.03	0.13	1.79	1.75	2.44	2.87	1.07	14900	-0.22
115	3476-3420	1.2500	3.1250	1.1563	1.1721	0.9375	0.05	0.13	1.69	1.61	2.64	2.91	1.60	16800	-0.34
116	M8804X-M88010	1.3125	2.6875	0.8750	0.8750	0.6875	0.03	0.06	1.67	1.62	2.28	2.56	1.07	10400	-0.11
117	14130-14276	1.3125	2.7170	0.7813	0.7710	0.6250	0.14	0.05	1.77	1.52	2.36	2.48	1.53	8800	-0.17
118	14131-14276	1.3125	2.7170	0.7813	0.7710	0.6250	0.03	0.05	1.56	1.52	2.36	2.48	1.53	8800	-0.17
119	2581-2523	1.3125	2.7500	0.9375	0.9983	0.7500	0.03	0.05	1.56	1.54	2.40	2.52	2.14	13500	-0.34
120	2585-2523	1.3125	2.7500	0.9375	0.9983	0.7500	0.14	0.05	1.77	1.54	2.40	2.52	2.14	13500	-0.34
121	26131-26283	1.3125	2.8346	0.7480	0.7450	0.6250	0.14	0.06	1.75	1.52	2.44	2.56	1.62	9500	-0.16
122	3196-3120	1.3125	2.8593	1.1875	1.1810	0.9375	0.14	0.13	1.85	1.59	2.40	2.64	1.76	15200	-0.40

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	db	da	Db	Da	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									RECOMMENDED SHOULDER DIAMETER						
									SHAFT		HOUSING				
123 *	HM88547-HM88510	1.3125	2.8750	1.1563	1.0938	0.9063	0.03	0.13	1.79	1.68	2.32	2.76	1.07	14000	-0.22
124	2785-2720	1.3125	3.0000	0.9375	1.0100	0.7500	0.14	0.13	1.81	1.57	2.60	2.76	1.93	14000	-0.32
125	2790-2720	1.3125	3.0000	0.9375	1.0100	0.7500	0.06	0.13	1.65	1.57	2.60	2.76	1.93	14000	-0.32
126	31590-31520	1.3125	3.0000	1.1563	1.1250	0.9375	0.03	0.13	1.69	1.67	2.52	2.83	1.45	15200	-0.30
127	HM89443-HM89410	1.3125	3.0000	1.1563	1.1250	0.9063	0.03	0.13	1.83	1.75	2.44	2.87	1.07	14900	-0.22
128	HM89444-HM89410	1.3125	3.0000	1.1563	1.1250	0.9063	0.15	0.13	2.09	1.75	2.44	2.87	1.07	14900	-0.22
129	LM48548-LM48510	1.3750	2.5625	0.7100	0.7200	0.5500	SPCL	0.05	1.81	1.57	2.28	2.40	1.55	8900	-0.15
130	LM48548A-LM48510	1.3750	2.5625	0.7100	0.7200	0.5500	0.03	0.05	1.59	1.66	2.28	2.40	1.55	8900	-0.14
131 *	M38549-M38510	1.3750	2.6250	0.8125	0.8125	0.6563	0.14	0.09	1.83	1.57	2.28	2.44	1.66	10100	-0.22
132	14585-14525	1.3750	2.6875	0.8125	0.8125	0.6250	0.14	0.09	1.81	1.57	2.32	2.48	1.66	9600	-0.23
133	14137A-14276	1.3750	2.7170	0.7813	0.7710	0.6250	0.06	0.05	1.65	1.57	2.36	2.48	1.53	8800	-0.17
134	14138A-14276	1.3750	2.7170	0.7813	0.7710	0.6250	0.14	0.05	1.81	1.57	2.36	2.48	1.53	8800	-0.17
135	HM88649-HM88610	1.3750	2.8438	1.0000	1.0000	0.7812	0.09	0.09	1.91	1.68	2.36	2.72	1.07	12300	-0.18
136	16137-16284	1.3750	2.8440	0.8125	0.8125	0.6250	0.14	0.05	1.85	1.59	2.48	2.64	1.45	9200	-0.16
137 *	2878-2820	1.3750	2.8750	0.8750	0.9375	0.6875	0.03	0.13	1.65	1.61	2.48	2.68	1.59	11900	-0.22
138	02877-02820	1.3750	2.8750	0.8750	0.8750	0.6875	0.14	0.13	1.91	1.65	2.44	2.68	1.29	10600	-0.15
139	02878-02820	1.3750	2.8750	0.8750	0.8750	0.6875	0.03	0.13	1.67	1.65	2.44	2.68	1.29	10600	-0.15

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									SHAFT		HOUSING				
									db	da	Db	Da			
140	2793-2735X	1.3750	2.8750	0.9375	1.0100	0.7500	0.03	0.03	1.65	1.61	2.60	2.72	1.93	14000	-0.32
141	25877-25820	1.3750	2.8750	0.9375	0.9688	0.7500	0.06	0.09	1.69	1.59	2.52	2.68	2.01	13700	-0.32
142	25877-25821	1.3750	2.8750	0.9375	0.9688	0.7500	0.06	0.03	1.69	1.59	2.56	2.68	2.01	13700	-0.32
143	25878-25821	1.3750	2.8750	0.9375	0.9688	0.7500	0.14	0.03	1.85	1.59	2.48	2.68	2.01	13700	-0.32
144 *	23690-23620	1.3750	2.8750	1.0625	1.0620	0.8750	0.14	0.06	1.93	1.66	2.48	2.68	1.58	14400	-0.32
145	2786-2720	1.3750	3.0000	0.9375	1.0100	0.7500	0.20	0.13	2.01	1.61	2.60	2.76	1.93	14000	-0.32
146	2793-2720	1.3750	3.0000	0.9375	1.0100	0.7500	0.03	0.13	1.65	1.61	2.60	2.76	1.93	14000	-0.32
147	2793-2729	1.3750	3.0000	0.9375	1.0100	0.7500	0.03	0.03	1.65	1.61	2.68	2.76	1.93	14000	-0.32
148	2796-2720	1.3750	3.0000	0.9375	1.0100	0.7500	0.14	0.13	1.87	1.61	2.60	2.76	1.93	14000	-0.32
149	31593-31520	1.3750	3.0000	1.1563	1.1250	0.9375	0.14	0.13	1.97	1.71	2.52	2.83	1.45	16000	-0.30
150	31594-31520	1.3750	3.0000	1.1563	1.1250	0.9375	0.06	0.13	1.81	1.71	2.52	2.83	1.45	16000	-0.30
151	31594-31521	1.3750	3.0000	1.1563	1.1250	0.9375	0.06	0.05	1.81	1.71	2.60	2.83	1.45	16000	-0.30
152	36137-36300	1.3750	3.0000	1.1563	1.1750	0.9375	0.06	0.13	1.77	1.67	2.60	2.80	1.67	16100	-0.36
153	HM89446-HM89410	1.3750	3.0000	1.1563	1.1250	0.9063	0.14	0.13	2.09	1.75	2.44	2.87	1.07	14900	-0.22
154	3482-3420	1.3750	3.1250	1.1563	1.1721	0.9375	0.03	0.13	1.73	1.71	2.64	2.91	1.60	17700	-0.34
155	3478-3420	1.3750	3.1250	1.1563	1.1721	0.9375	0.14	0.13	1.97	1.71	2.64	2.91	1.60	16800	-0.34
156	3379-3320	1.3750	3.1562	1.1563	1.1965	0.9375	0.14	0.13	1.89	1.63	2.76	2.95	2.14	18500	-0.43
157	2872-3820	1.3750	3.3750	1.1875	1.1875	0.9375	0.14	0.13	2.09	1.81	2.87	3.19	1.45	20000	-0.32
158 *	3581-3526	1.3750	3.4375	1.1875	1.2160	0.9375	0.14	0.03	1.95	1.69	2.98	3.15	1.91	19100	-0.40
159	449-432	1.3750	3.7500	1.0938	1.1772	0.8750	0.03	0.09	1.73	1.71	3.27	3.43	2.05	20500	-0.36
160	31597-31520	1.4375	3.0000	1.1563	1.1250	0.9375	0.14	0.13	2.01	1.75	2.52	2.83	1.45	16000	-0.30
161	HM89448-HM89410	1.4375	3.0000	1.1563	1.1250	0.9063	0.03	0.13	1.91	1.75	2.44	2.87	1.07	14900	-0.22
162	HM89449-HM89410	1.4375	3.0000	1.1563	1.1250	0.9063	0.14	0.13	2.13	1.75	2.44	2.87	1.07	14900	-0.22

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	db RECOMMENDED SHOULDER DIAMETER SHAFT	da SHAFT	Db HOUSING	Da HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
163	HM89449-HM89411	1.4375	3.0000	1.1563	1.1250	0.9063	0.14	0.03	2.13	1.75	2.56	2.87	1.07	14900	-0.22
164	26877-26822	1.4375	3.1250	0.9375	1.0000	0.7500	0.03	0.03	1.73	1.69	2.80	2.91	1.83	14700	-0.29
165	3479-3420	1.4375	3.1250	1.1563	1.1721	0.9375	0.03	0.13	1.79	1.75	2.64	2.91	1.60	16800	-0.34
166	HM89249-HM89210	1.4375	3.1250	1.1563	1.1350	0.8923	0.14	0.13	2.17	1.73	2.60	2.95	1.07	17000	-0.23
167	25570-25520	1.4375	3.2650	0.9375	1.0000	0.7500	0.14	0.03	2.01	1.77	2.91	3.03	1.74	14500	-0.25
168	3878-3820	1.4375	3.3570	1.1875	1.1875	0.9375	0.03	0.13	1.89	1.85	2.87	3.19	1.45	20000	-0.32
169	13889-13830	1.5000	2.5000	0.5000	0.4688	0.3750	0.06	0.03	1.77	1.67	2.32	2.36	1.69	4500	-0.03
170	13889-13836	1.5000	2.5625	0.5000	0.4688	0.3750	0.06	0.03	1.77	1.67	2.32	2.40	1.69	4500	-0.03
171	LM29748-LM29710	1.5000	2.5625	0.7100	0.7200	0.5500	SPCL	0.05	1.93	1.67	2.32	2.44	1.76	7900	-0.16
172	LM29749-LM29710	1.5000	2.5625	0.7100	0.7200	0.5500	0.04	0.05	1.81	1.67	2.32	2.44	1.76	7900	-0.16
173	LM29749-LM29711	1.5000	2.5625	0.7800	0.7200	0.6200	0.09	0.05	1.81	1.67	2.28	2.44	1.76	7900	-0.16
174	19150-19268	1.5000	2.6875	0.6250	0.6504	0.4688	0.06	0.06	1.77	1.69	2.40	2.56	1.31	8300	-0.06
175	13685-13621	1.5000	2.7170	0.7500	0.7500	0.5938	0.14	0.09	1.95	1.69	2.40	2.56	1.45	9420	-0.12
176	13687-13620	1.5000	2.7170	0.7500	0.7500	0.5938	0.08	0.03	1.83	1.69	2.44	2.56	1.45	9420	-0.12
177	13687-13621	1.5000	2.7170	0.7500	0.7500	0.5938	0.08	0.09	1.83	1.69	2.40	2.56	1.45	9420	-0.12
178	19150-19281	1.5000	2.8125	0.6250	0.6504	0.4688	0.06	0.04	1.77	1.69	2.48	2.60	1.31	8300	-0.06
179	19150-19283	1.5000	2.8346	0.6700	0.6504	0.5625	0.06	0.06	1.77	1.69	2.48	2.60	1.31	8300	-0.06
180	16150-16282	1.5000	2.8436	0.7480	0.8125	0.5605	0.14	0.06	1.95	1.69	2.48	2.64	1.45	9200	-0.16
181	16150-16284	1.5000	2.8440	0.8125	0.8125	0.6250	0.14	0.05	1.95	1.69	2.48	2.64	1.45	9200	-0.16
182 *	2788A-2735X	1.5000	2.8750	0.9375	1.0100	0.7500	0.06	0.03	1.81	1.71	2.60	2.72	1.93	14700	-0.31
183	28150-28300	1.5000	3.0000	0.8125	0.8244	0.6105	0.06	0.05	1.79	1.71	2.68	2.80	1.45	10200	-0.19

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER db SHAFT	RECOMMENDED SHOULDER DIAMETER da SHAFT	RECOMMENDED SHOULDER DIAMETER Db HOUSING	RECOMMENDED SHOULDER DIAMETER Da HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
184	2788-2729	1.5000	3.0000	0.9375	1.0100	0.7500	0.14	0.03	1.97	1.71	2.68	2.76	1.93	14000	-0.31
185	2776-2720	1.5000	3.0000	0.9375	1.0100	0.7500	0.17	0.13	2.05	1.71	2.60	2.76	1.93	14000	-0.32
186	2777-2720	1.5000	3.0000	0.9375	1.0100	0.7500	0.22	0.13	2.13	1.71	2.60	2.76	1.93	14000	-0.32
187	2788-2720	1.5000	3.0000	0.9375	1.0100	0.7500	0.14	0.13	1.97	1.71	2.60	2.76	1.93	14000	-0.32
188	2788A-2720	1.5000	3.0000	0.9375	1.0100	0.7500	0.06	0.13	1.81	1.71	2.60	2.76	1.93	14000	-0.32
189	26878-26822	1.5000	3.1250	0.9375	1.0000	0.7500	0.03	0.03	1.77	1.75	2.80	2.91	1.83	14700	-0.29
190	3490-3420	1.5000	3.1250	1.1563	1.1721	0.9375	0.14	0.13	2.05	1.80	2.64	2.91	1.60	16800	-0.34
191 •	347-332	1.5000	3.1496	0.8268	0.8820	0.7018	0.14	0.05	1.97	1.73	2.87	2.95	2.14	12900	-0.25
192	28150-28315	1.5000	3.1496	0.8270	0.8244	0.6250	0.06	0.06	1.79	1.71	2.72	2.87	1.45	10400	-0.19
193	2788-0-27820	1.5000	3.1510	0.9688	0.9330	0.7288	0.03	0.06	1.89	1.85	2.68	2.95	1.04	12600	-0.10
194 •	27881-27820	1.5000	3.1510	0.9688	0.9330	0.7288	0.14	0.06	2.09	1.85	2.68	2.95	1.04	12600	-0.10
195 •	26878-26820	1.5000	3.1562	1.0000	1.0000	0.8125	0.03	0.13	1.77	1.75	2.72	2.91	1.83	14700	-0.29
196	3490-3422	1.5000	3.1562	1.1563	1.1721	0.9375	0.14	0.13	2.05	1.81	2.68	2.91	1.60	16800	-0.34
197	3381-3320	1.5000	3.1562	1.1563	1.1965	0.9375	0.14	0.13	2.01	1.75	2.76	2.95	2.14	18500	-0.43
198 •	HM801346-HM801310	1.5000	3.2500	1.1563	1.1250	0.9063	0.03	0.13	2.01	1.93	2.68	3.07	1.07	16400	-0.19
199	25572-25520	1.5000	3.2650	0.9375	1.0000	0.7500	0.03	0.03	1.81	1.81	2.91	3.03	1.74	14500	-0.25
200	3875-3820	1.5000	3.3750	1.1875	1.1875	0.9375	0.03	0.13	1.95	1.91	2.87	3.19	1.45	20000	-0.32
201	3876-3820	1.5000	3.3750	1.1875	1.1875	0.9375	0.14	0.13	2.17	1.91	2.87	3.19	1.45	20000	-0.32
202 •	3583-3525	1.5000	3.4375	1.1875	1.2160	0.9375	0.14	0.13	2.05	1.79	2.95	3.19	1.91	18100	-0.40
203	3580-3525	1.5000	3.4375	1.1875	1.2160	0.9375	0.06	0.13	1.89	1.79	2.95	3.19	1.91	18100	-0.40
204	418-414	1.5000	3.4843	1.0625	1.1450	0.8750	0.14	0.06	2.01	1.75	3.03	3.15	2.22	18600	-0.38
205	4375-4335	1.5000	3.5625	1.5625	1.5900	1.3125	0.06	0.13	2.01	1.91	3.03	3.35	2.05	28700	-0.59
206 •	49150-49368	1.5000	3.6875	1.2500	1.2500	1.0000	0.14	0.13	2.13	1.89	3.23	3.43	1.62	21800	-0.36
207	440-432	1.5000	3.7500	1.0938	1.1772	0.8750	0.03	0.09	1.83	1.79	3.27	3.43	2.05	20500	-0.36

• INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER db SHAFT	RECOMMENDED SHOULDER DIAMETER da SHAFT	RECOMMENDED SHOULDER DIAMETER Db HOUSING	RECOMMENDED SHOULDER DIAMETER Da HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
208	33880-33821	1.5000	3.7500	1.0938	1.1250	0.8750	0.14	0.09	2.13	1.89	3.35	3.54	1.77	20900	-0.30
209	525-522	1.5000	4.000	1.3750	1.4200	1.0625	0.14	0.13	2.13	1.89	3.50	3.74	2.05	26400	-0.50
210 *	542-532A	1.5000	4.3750	1.5000	1.4550	1.1875	0.14	0.13	2.17	1.93	3.74	3.94	1.97	27600	-0.48
211	18587-18520	1.5625	2.8750	0.6562	0.6875	0.5000	0.03	0.06	1.79	1.77	2.60	2.72	1.67	8300	-0.11
212	2789-2735X	1.5625	2.8750	0.9375	1.0100	0.7500	0.14	0.03	2.05	1.77	2.60	2.72	1.93	14000	-0.31
213 *	2789-2720	1.5625	3.0000	0.9375	1.0100	0.7500	0.14	0.13	2.05	1.77	2.60	2.76	1.93	14000	-0.32
214	3382-3321	1.5625	3.0525	1.1563	1.1965	0.9375	0.14	0.13	2.05	1.79	2.68	2.94	2.14	18500	-0.43
215	26880-26822	1.5625	3.1250	0.9375	1.0000	0.7500	0.06	0.03	1.89	1.79	2.80	2.91	1.83	14700	-0.29
216	26881-26822	1.5625	3.1250	0.9375	1.0000	0.7500	0.14	0.03	2.05	1.79	2.80	2.91	1.83	14700	-0.29
217	3382-3339	1.5625	3.1510	1.1563	1.1965	0.9375	0.14	0.06	2.05	1.79	2.80	2.94	2.14	18500	-0.43
218	3382-3320	1.5625	3.1562	1.1563	1.1965	0.9375	0.14	0.13	2.05	1.79	2.76	2.95	2.14	18500	-0.43
219	3382-3331	1.5625	3.1562	1.1563	1.1965	0.9375	0.14	0.03	2.05	1.79	2.83	2.94	2.14	18500	-0.43
220	3386-3320	1.5625	3.1562	1.1563	1.1965	0.9375	0.03	0.13	1.83	1.79	2.76	2.95	2.14	18500	-0.43
221	3382-3328	1.5625	3.3125	1.1563	1.1965	0.9375	0.14	0.13	2.05	1.79	2.83	2.99	2.14	18500	-0.43
222	18590-18520	1.6250	2.8750	0.6562	0.6875	0.5000	0.14	0.06	2.09	1.81	2.60	2.72	1.67	8300	-0.11
223	LM501349-LM501310	1.6250	2.8910	0.7700	0.7800	0.5800	0.14	0.03	2.09	1.83	2.64	2.76	1.46	10100	-0.13
224	LM501349-LM501314	1.6250	2.8910	0.8437	0.7800	0.6537	0.14	0.03	2.09	1.83	2.60	2.76	1.46	10100	-0.13
225	11162-11300	1.6250	3.0000	0.7090	0.6844	0.5625	0.06	0.06	1.93	1.83	2.64	2.80	1.20	7800	-0.03
226	24780-24720	1.6250	3.0000	0.8750	0.9063	0.6875	0.14	0.03	2.13	1.85	2.68	2.83	1.49	12300	-0.19
227	26882-26823	1.6250	3.0000	1.0000	1.0000	0.8125	0.14	0.06	2.13	1.85	2.72	2.87	1.83	14700	-0.29

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB)	a 3/ EFFECTIVE LOAD CENTER
									SHAFT		HOUSING			RADIAL	
									db	da	Db	Da			
228	26882-26822	1.6250	3.1250	0.9375	1.0000	0.7500	0.14	0.03	2.13	1.85	2.80	2.91	1.83	14700	-0.29
229	26882-26822A	1.6250	3.1250	0.9375	1.0000	0.7500	0.14	0.09	2.13	1.85	2.72	2.91	1.83	14700	-0.29
230	26885-26822	1.6250	3.1250	0.9375	1.0000	0.7500	0.03	0.03	1.89	1.85	2.80	2.91	1.83	14700	-0.29
231	11162-11315	1.6250	3.1496	0.7090	0.6844	0.5625	0.06	0.06	1.93	1.83	2.72	2.87	1.20	7800	-0.03
232	336-332	1.6250	3.1496	0.8268	0.8020	0.7018	0.03	0.05	1.85	1.81	2.87	2.95	2.14	12900	-0.25
233	342-332	1.6250	3.1496	0.8268	0.8020	0.7018	0.14	0.05	2.09	1.81	2.87	2.95	2.14	12900	-0.25
234	26882-26824	1.6250	3.1496	0.9375	1.0000	0.7500	0.14	0.05	2.13	1.85	2.76	2.91	1.83	14700	-0.29
235	26882-26820	1.6250	3.1562	1.0000	1.0000	0.8125	0.14	0.13	2.13	1.85	2.72	2.91	1.83	14700	-0.29
236	M802048-M802011	1.6250	3.2500	1.0450	1.0100	0.7950	0.14	0.13	2.24	1.99	2.76	3.11	1.07	14700	-0.12
237	3877-3820	1.6250	3.3750	1.1875	1.1875	0.9375	0.14	0.13	2.24	1.98	2.87	3.19	1.45	20000	-0.32
238	3877-3821	1.6250	3.3750	1.1875	1.1875	0.9375	0.14	0.05	2.24	1.98	2.95	3.19	1.45	20000	-0.32
239	3880-3820	1.6250	3.3750	1.1875	1.1875	0.9375	0.03	0.13	2.05	1.98	2.87	3.19	1.45	20000	-0.32
240	3576-3525	1.6250	3.4375	1.1875	1.2160	0.9375	0.03	0.13	1.93	1.89	2.95	3.19	1.91	18100	-0.40
241	3577-3525	1.6250	3.4375	1.1875	1.2160	0.9375	0.14	0.13	2.13	1.89	2.95	3.19	1.91	18100	-0.40
242	3585-3525	1.6250	3.4375	1.1875	1.2160	0.9375	0.06	0.13	1.97	1.89	2.95	3.19	1.91	18100	-0.40
243	44162-44348	1.6250	3.4843	1.0000	0.9330	0.6875	0.09	0.06	2.24	2.00	2.95	3.31	0.75	13600	-0.09
244	419-414	1.6250	3.4843	1.0625	1.1450	0.8750	0.14	0.06	2.13	1.85	3.03	3.15	2.22	18600	-0.38
245	365A-362A	1.6250	3.5000	0.8125	0.8750	0.6501	0.14	0.05	2.17	1.91	3.19	3.31	1.83	14000	-0.17
246	HM803145-HM803110	1.6250	3.5000	1.1875	1.1563	0.9063	0.03	0.13	2.13	2.09	2.91	3.35	1.07	18200	-0.17
247	HM803146-HM803110	1.6250	3.5000	1.1875	1.1563	0.9063	0.14	0.13	2.36	2.09	2.91	3.35	1.07	18200	-0.17

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER db SHAFT	RECOMMENDED SHOULDER DIAMETER da SHAFT	RECOMMENDED SHOULDER DIAMETER Db HOUSING	RECOMMENDED SHOULDER DIAMETER Da HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
248	HM803146-HM803111	1.6250	3.5000	1.1875	1.1563	0.9063	0.14	0.03	2.36	2.09	2.99	3.35	1.07	18200	-0.17
249	4388-4335	1.6250	3.5625	1.5625	1.5900	1.3125	0.14	0.13	2.24	2.01	3.03	3.35	2.05	26700	-0.59
250 *	49162-49368	1.6250	3.6875	1.2500	1.2500	1.0000	0.14	0.13	2.24	1.97	3.23	3.43	1.62	21800	-0.36
251	46162-46368	1.6250	3.6875	1.2500	1.2500	1.0313	0.03	0.13	2.05	2.01	3.11	3.43	1.45	20800	-0.31
252	HM804840-HM804810	1.6250	3.7500	1.1875	1.1563	0.9063	0.14	0.13	2.40	2.13	3.19	3.58	1.07	20000	-0.15
253	526-522	1.6250	4.0000	1.3750	1.4200	1.0625	0.14	0.13	2.24	1.97	3.50	3.74	2.05	26400	-0.50
254	HM807035-HM807010	1.6250	4.1250	1.4375	1.4375	1.1250	0.06	0.13	2.36	2.24	3.50	3.94	1.20	27500	-0.29
255	HM807035-HM807011	1.6250	4.1250	1.4375	1.4375	1.1250	0.06	0.03	2.36	2.24	3.58	3.94	1.20	27500	-0.29
256	12168-12303	1.6875	3.0312	0.6875	0.6750	0.4688	0.06	0.06	2.01	1.91	2.68	2.87	1.15	8100	0.00
257	22168-22325	1.6875	3.2500	0.7812	0.7810	0.5937	0.09	0.06	2.05	1.91	2.87	2.99	1.36	10600	-0.10
258	22780-22720	1.6875	3.2500	1.0313	1.0625	0.8125	0.14	0.13	2.20	1.97	2.80	3.03	1.45	14900	-0.25
259	25578-25520	1.6875	3.2650	0.9375	1.0000	0.7500	0.09	0.03	2.09	1.95	2.91	3.03	1.74	14500	-0.25
260	3679-3525	1.6875	3.4375	1.1875	1.2160	0.9375	0.14	0.13	2.20	1.95	2.95	3.19	1.91	18100	-0.40
261	LL103049-LL103010	1.7500	2.8125	0.5000	0.5000	0.3750	0.06	0.06	2.01	1.91	2.56	2.68	1.91	5900	-0.05
262	L102849-L102810	1.7500	2.8750	0.7188	0.7188	0.5938	0.06	0.06	2.01	1.93	2.60	2.72	1.83	9300	-0.15
263	12175-12303	1.7500	3.0312	0.6875	0.6750	0.4688	0.06	0.06	2.05	1.95	2.68	2.87	1.15	8100	0.00
264	18685-18620	1.7500	3.1250	0.6875	0.6875	0.5313	0.11	0.06	2.13	1.95	2.80	2.91	1.56	8500	-0.08
265	13175-13318	1.7500	3.1875	0.7500	0.6875	0.5625	SPCL	0.06	1.97	1.97	2.83	2.99	1.11	8300	0.03

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER db SHAFT	RECOMMENDED SHOULDER DIAMETER da SHAFT	RECOMMENDED SHOULDER DIAMETER Db HOUSING	RECOMMENDED SHOULDER DIAMETER Da HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	e 3/ EFFECTIVE LOAD CENTER
266 •	35176-35326	1.7500	3.2650	0.8750	0.9060	0.6875	0.03	0.03	1.97	1.95	2.99	3.07	1.96	13400	-0.24
267	25580-25520	1.7500	3.2650	0.9375	1.0000	0.7500	0.14	0.03	2.24	1.97	2.91	3.03	1.74	14500	-0.25
268	25581-25520	1.7500	3.2650	0.9375	1.0000	0.7500	0.02	0.03	2.01	1.97	2.91	3.03	1.74	14500	-0.25
269	25582-25520	1.7500	3.2650	0.9375	1.0000	0.7500	0.20	0.03	2.36	1.97	2.91	3.03	1.74	14500	-0.25
270	25580-25521	1.7500	3.2700	0.9375	1.0000	0.7500	0.14	0.13	2.24	1.97	2.83	3.03	1.74	14500	-0.25
271	3578-3520	1.7500	3.3125	1.1875	1.2160	0.9375	0.14	0.13	2.24	2.01	2.91	3.13	1.91	18100	-0.40
272	355-354A	1.7500	3.3465	0.8125	0.8540	0.6875	0.09	0.05	2.13	1.97	3.03	3.15	1.91	13300	-0.19
273	335A-354A	1.7500	3.3465	0.8125	0.8540	0.6875	0.03	0.05	2.01	1.97	3.03	3.15	1.91	13300	-0.19
274	3578-3525	1.7500	3.4375	1.1875	1.2160	0.9375	0.14	0.13	2.24	2.01	2.95	3.19	1.91	18100	-0.40
275	3578-3526	1.7500	3.4375	1.1875	1.2160	0.9375	0.14	0.03	2.24	2.01	3.03	3.19	1.91	18100	-0.40
276	HM803149-HM803110	1.7500	3.5000	1.1875	1.1563	0.9063	0.14	0.13	2.44	2.10	2.91	3.35	1.07	18200	-0.17
277	3782-3720	1.7500	3.6718	1.1875	1.1930	0.9375	0.14	0.13	2.28	2.05	3.23	3.46	1.73	19700	-0.32
278	46175-46368	1.7500	3.6875	1.2500	1.2500	1.0313	0.03	0.13	2.17	2.13	3.11	3.43	1.45	20800	-0.31
279	46176-46368	1.7500	3.6875	1.2500	1.2500	1.0313	0.14	0.13	2.36	2.13	3.11	3.43	1.45	20800	-0.31
280 •	49175-49368	1.7500	3.6875	1.2500	1.2500	1.0000	0.14	0.13	2.32	2.09	3.23	3.43	1.62	21800	-0.36
281	438-432	1.7500	3.7500	1.0938	1.1772	0.8750	0.14	0.09	2.34	2.01	3.27	3.43	2.05	20500	-0.36
282	438-432A	1.7500	3.7500	1.0938	1.1772	0.8750	0.14	0.03	2.24	2.01	3.31	3.43	2.05	20500	-0.36
283	33885-33821	1.7500	3.7500	1.0938	1.1250	0.8750	0.03	0.09	2.09	2.09	3.35	3.54	1.77	20900	-0.30
284	HM804842-HM804810	1.7500	3.7500	1.1875	1.1563	0.9063	0.03	0.13	2.24	2.24	3.19	3.58	1.07	20000	-0.15
285 •	HM804843-HM804810	1.7500	3.7500	1.1875	1.1563	0.9063	0.14	0.13	2.48	2.24	3.19	3.58	1.07	20000	-0.15

• INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE–CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									SHAFT		HOUSING				
									db	da	Db	Da			
286 *	3783–3732	1.7500	3.8750	1.1875	1.1930	0.9375	0.25	0.13	2.52	2.05	3.31	3.54	1.73	19700	–0.32
287	49576–49520	1.7500	4.0000	1.2500	1.2500	1.0000	0.03	0.13	2.17	2.13	3.46	3.78	1.46	21300	–0.28
288	527–522	1.7500	4.0900	1.3750	1.4200	1.0625	0.14	0.13	2.32	2.09	3.50	3.74	2.05	26400	–0.50
289	5356–5335	1.7500	4.0625	1.7188	1.7510	1.4375	0.05	0.13	2.28	2.20	3.50	3.82	1.97	33800	–0.63
290	460–453X	1.7500	4.1250	1.1875	1.1542	0.9687	0.14	0.13	2.36	2.13	3.62	3.86	1.74	21600	–0.28
291	55200–45220	1.7500	4.1250	1.1875	1.2188	0.9375	0.03	0.13	2.17	2.13	3.66	3.90	1.76	22600	–0.32
292	59175–59412	1.7500	4.1250	1.4375	1.4375	1.1250	0.14	0.13	2.48	2.20	3.62	3.90	1.45	27400	–0.38
293	HM807040–HM807010	1.7500	4.1250	1.4375	1.4375	1.1250	0.14	0.13	2.60	2.32	3.50	3.94	1.20	27500	–0.29
294 *	535–532X	1.7500	4.2500	1.4375	1.4550	1.1250	0.14	0.13	2.36	2.13	3.70	3.94	1.97	27600	–0.48
295 *	615–612A	1.7500	4.7260	1.6250	1.6250	1.2500	0.14	0.13	2.44	2.20	4.06	4.33	1.86	33200	–0.55
296	6277–6220	1.7500	5.0000	2.0000	2.0625	1.6250	0.14	0.13	2.64	2.36	4.25	4.61	1.98	48500	–0.77
297	LM603049–LM603011	1.7812	3.0625	0.7812	0.7812	0.5937	0.14	0.03	2.24	1.97	2.80	2.91	1.37	10400	–0.09
298	25590–25523	1.7960	3.2650	1.0625	1.0000	0.8750	0.14	0.09	2.28	2.01	2.83	3.03	1.74	14500	–0.25
299 *	18690–18620	1.8125	3.1250	0.6875	0.6875	0.5313	0.11	0.06	2.20	2.01	2.80	2.91	1.56	8500	–0.08
300	13181–13318	1.8125	3.1875	0.7500	0.6875	0.5625	0.03	0.06	2.95	2.05	2.83	2.99	1.11	8300	–0.03
301	25592–25520	1.8125	3.2650	0.9375	1.0000	0.7500	0.14	0.03	2.28	2.05	2.91	3.03	1.74	14500	–0.25

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER da SHAFT	RECOMMENDED SHOULDER DIAMETER Da SHAFT	RECOMMENDED SHOULDER DIAMETER Db HOUSING	RECOMMENDED SHOULDER DIAMETER Da HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
302	359A-354A	1.8125	3.3465	0.8125	0.8540	0.6875	0.14	0.05	2.24	2.01	3.03	3.15	1.91	13300	-0.19
303	359-S-354A	1.8125	3.3465	0.8125	0.8540	0.6875	0.09	0.05	2.17	2.01	3.03	3.15	1.91	13300	-0.19
304	2984-2924	1.8125	3.3465	1.0000	1.0062	0.8125	0.14	0.05	2.28	2.05	2.99	3.15	1.69	15100	-0.25
305	359-S-352	1.8125	3.5480	0.9055	0.8540	0.8586	0.09	0.09	2.17	2.01	3.07	3.23	1.91	13300	-0.19
306	3777-3720	1.8125	3.6718	1.1875	1.1930	0.9375	0.14	0.13	2.36	2.09	3.23	3.46	1.73	19700	-0.32
307	436-432	1.8125	3.7500	1.0938	1.1772	0.8750	0.14	0.09	2.32	2.05	3.27	3.43	2.05	20500	-0.36
308	369A-362A	1.8750	3.5000	0.8125	0.8750	0.6501	0.14	0.05	2.36	2.09	3.19	3.31	1.83	14000	-0.17
309	369-S-362A	1.8750	3.5000	0.8125	0.8750	0.6501	0.09	0.05	2.24	2.09	3.19	3.31	1.83	14000	-0.17
310	M804048-M804010	1.8750	3.5000	1.0000	1.0000	0.7500	0.03	0.13	2.24	2.19	3.03	3.35	1.07	15900	-0.07
311	M804049 M804010	1.8750	3.5000	1.0000	1.0000	0.7500	0.14	0.13	2.48	2.19	3.03	3.35	1.07	15900	-0.07
312	3778-3720	1.8750	3.6718	1.1875	1.1930	0.9375	0.25	0.13	2.64	2.17	3.23	3.46	1.73	19700	-0.32
313	3779-3720	1.8750	3.6718	1.1875	1.1930	0.9375	0.14	0.13	2.40	2.17	3.23	3.46	1.73	19700	-0.32
314	HM804846-HM804810	1.8750	3.7500	1.1875	1.1563	0.9063	0.14	0.13	2.60	2.26	3.19	3.58	1.07	20000	-0.15
315	386A-382A	1.8750	3.8125	0.8268	0.8640	0.6250	0.03	0.03	2.20	2.17	3.50	3.62	1.65	14800	-0.12
316	528-522	1.8750	4.0000	1.3750	1.4200	1.0625	0.14	0.13	2.44	2.17	3.50	3.74	2.05	26400	-0.50
317	463-453X	1.8750	4.1250	1.1875	1.1542	0.9687	0.19	0.13	2.56	2.20	3.62	3.86	1.74	21800	-0.28
318	467-453X	1.8750	4.1250	1.1875	1.1542	0.9687	0.03	0.13	2.24	2.20	3.62	3.86	1.74	21800	-0.28
319	45282-45220	1.8750	4.1250	1.1875	1.2188	0.9375	0.14	0.13	2.48	2.24	3.66	3.90	1.76	22600	-0.32
320 *	617-612A	1.8750	4.7280	1.6250	1.6250	1.2500	0.14	0.13	2.56	2.28	4.06	4.33	1.86	33200	-0.55
321	HM804849-HM804810	1.9060	3.7500	1.1875	1.1563	0.9063	0.14	0.13	2.60	2.27	3.19	3.58	1.07	20000	-0.15

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	db	da	Db	Da	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									RECOMMENDED SHOULDER DIAMETER						
									SHAFT		HOUSING				
322	365-S-362A	1.9375	3.5000	0.8125	0.8750	0.6501	0.03	0.05	2.17	2.13	3.19	3.31	1.83	14000	-0.17
323	3781-3720	1.9375	3.6718	1.1875	1.1930	0.9375	0.14	0.03	2.44	2.20	3.31	3.46	1.73	19700	-0.32
324	5395-5335	1.9375	4.0625	1.7188	1.7510	1.4375	0.14	0.13	2.60	2.36	3.50	3.82	1.97	33800	-0.63
325	HM807044-HM807010	1.9375	4.1250	1.4375	1.4375	1.1250	0.14	0.13	2.72	2.48	3.50	3.94	1.20	27500	-0.29
326 *	65390-65320	1.9375	4.5000	1.7500	1.7500	1.3750	0.14	0.13	2.76	2.36	3.82	4.21	1.36	35700	-0.49
327	HH506348-HH506310	1.9375	4.5000	1.7500	1.7500	1.4200	0.14	0.13	2.80	2.40	3.82	4.21	1.45	39100	-0.53
328	LL205449-LL205410	2.0000	3.0625	0.5000	0.5000	0.3750	0.06	0.06	2.24	2.17	2.80	2.91	1.74	6200	0.00
329	L305649-L305610	2.0000	3.1875	0.7188	0.7188	0.5625	0.06	0.06	2.28	2.20	2.87	3.03	1.64	9900	-0.10
330	LM104949-LM104911	2.0000	3.2500	0.8500	0.8750	0.6500	0.14	0.05	2.44	2.17	2.95	3.07	1.91	13200	-0.23
331	LM104949-LM104912	2.0000	3.2650	0.8500	0.8750	0.6500	0.14	0.05	2.44	2.17	2.95	3.06	1.91	13200	-0.23
332	18790-18720	2.0000	3.3465	0.6875	0.6875	0.5313	0.14	0.06	2.44	2.20	3.03	3.15	1.44	8900	-0.03
333	18200-18337	2.0000	3.3750	0.7500	0.7190	0.5000	0.06	0.06	2.32	2.20	2.99	3.19	1.03	8400	0.08
334	18790-18724	2.0000	3.5000	0.6875	0.6875	0.5313	0.14	0.05	2.44	2.20	3.07	3.23	1.44	8900	-0.03
335	368-362A	2.0000	3.5000	0.8125	0.8750	0.6501	0.06	0.05	2.28	2.20	3.19	3.31	1.83	14000	-0.17
336	368A-362A	2.0000	3.5000	0.8125	0.8750	0.6501	0.14	0.05	2.44	2.20	3.19	3.31	1.83	14000	-0.17
337	370A-362A	2.0000	3.5000	0.8125	0.8750	0.6501	0.20	0.05	2.56	2.20	3.19	3.31	1.83	14000	-0.17
338	368-362	2.0000	3.5433	0.7874	0.8750	0.6250	0.06	0.08	2.28	2.20	3.19	3.31	1.83	14000	-0.17
339	368A-362	2.0000	3.5433	0.7874	0.8750	0.6250	0.14	0.08	2.44	2.20	3.19	3.31	1.83	14000	-0.17
340	368A-363	2.0000	3.5433	0.7874	0.8750	0.7874	0.14	0.03	2.44	2.20	3.23	3.34	1.83	14000	-0.17
341	28580-28521	2.0000	3.6250	0.9688	1.0000	0.7813	0.14	0.03	2.48	2.24	3.27	3.43	1.55	16000	-0.19
342	28580A-28521	2.0000	3.6250	0.9688	1.0000	0.7813	0.03	0.03	2.28	2.24	3.27	3.43	1.55	16000	-0.19

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE–CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									SHAFT		HOUSING				
									db	da	Db	Da			
343	375–374	2.0000	3.6718	0.8125	0.8750	0.5938	0.09	0.05	2.36	2.24	3.35	3.46	1.73	14200	–0.15
344	3775–3720	2.0000	3.6718	1.1875	1.1930	0.9375	0.03	0.13	2.28	2.28	3.23	3.46	1.73	19700	–0.32
345	3780–3720	2.0000	3.6718	1.1875	1.1930	0.9375	0.14	0.13	2.52	2.28	3.23	3.46	1.73	19700	–0.32
346	3780–3730	2.0000	3.6718	1.1875	1.1930	0.9375	0.14	0.03	2.52	2.28	3.31	3.46	1.73	19700	–0.32
347	3784–3720	2.0000	3.6718	1.1875	1.1930	0.9375	0.25	0.13	2.76	2.28	3.23	3.46	1.73	19700	–0.32
348	33889–33821	2.0000	3.7500	1.0938	1.1250	0.8750	0.14	0.09	2.52	2.28	3.35	3.54	1.77	20900	–0.30
349	3780–3726	2.0000	3.7500	1.1875	1.1930	0.9375	0.14	0.13	2.52	2.28	3.27	3.50	1.73	19700	–0.32
350	385A–382A	2.0000	3.8125	0.8268	0.8640	0.6250	0.09	0.03	2.40	2.36	3.50	3.62	1.65	14800	–0.12
351	385AX–382A	2.0000	3.8125	0.8268	0.8640	0.6250	0.03	0.03	2.28	2.28	3.50	3.62	1.65	14800	–0.12
352	28678–28622	2.0000	3.8437	0.9688	0.9688	0.7656	0.14	0.03	2.56	2.28	3.46	3.62	1.45	16800	–0.13
353	3780–3732	2.0000	3.8750	1.1875	1.1930	0.9375	0.14	0.13	2.52	2.28	3.31	3.54	1.73	19700	–0.32
354	49585–49522	2.0000	4.0000	1.2500	1.2500	1.0000	0.14	0.03	2.60	2.32	3.54	3.78	1.46	21300	–0.28
355	49585–49520	2.0000	4.0000	1.2500	1.2500	1.0000	0.14	0.13	2.60	2.32	3.46	3.78	1.46	21300	–0.28
356	529–522	2.0000	4.0000	1.3750	1.4200	1.0625	0.03	0.13	2.32	2.28	3.50	3.74	2.05	26400	–0.50
357	529X–522	2.0000	4.0000	1.3750	1.4200	1.0625	0.14	0.13	2.56	2.28	3.50	3.74	2.05	26400	–0.50
358	455–453X	2.0000	4.1250	1.1875	1.1542	1.9687	0.03	0.13	2.36	2.32	3.62	3.86	1.74	21800	–0.28
359	455–S–453X	2.0000	4.1250	1.1875	1.1542	0.9687	0.14	0.13	2.56	2.32	3.62	3.86	1.74	21800	–0.28
360	45284–45220	2.0000	4.1250	1.1875	1.2188	0.9375	0.25	0.13	2.80	2.32	3.66	3.90	1.76	22600	–0.32
361	45285–45220	2.0000	4.1250	1.1875	1.2188	0.9375	0.09	0.13	2.48	2.32	3.66	3.90	1.76	22600	–0.32
362	45285A–45220	2.0000	4.1250	1.1875	1.2188	0.9375	0.03	0.13	2.36	2.32	3.66	3.90	1.76	22600	–0.32
363	59200–59412	2.0000	4.1250	1.4375	1.4375	1.1250	0.14	0.13	2.68	2.40	3.62	3.90	1.45	27400	–0.38

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	db	da	Db	Da	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									RECOMMENDED SHOULDER DIAMETER						
									SHAFT		HOUSING				
364	59201-59412	2.0000	4.1250	1.4375	1.4375	1.1250	0.03	0.13	2.44	2.40	3.62	3.90	1.45	27400	-0.38
365	HM807046-HM807010	2.0000	4.1250	1.4375	1.4375	1.1250	0.14	0.13	2.76	2.48	3.50	3.94	1.20	27500	-0.29
366	537-532X	2.0000	4.2500	1.4375	1.4550	1.1250	0.14	0.13	2.56	2.32	3.70	3.94	1.97	27600	-0.48
367	398-394A	2.0000	4.3307	0.8661	0.8660	0.7411	0.03	0.05	2.44	2.40	3.98	4.11	1.45	16200	-0.03
368	3975-3920	2.0000	4.4375	1.1875	1.1830	0.9375	0.14	0.13	2.68	2.40	3.90	4.17	1.45	22400	-0.18
369	39573-39520	2.0000	4.4375	1.1875	1.1830	0.9375	0.03	0.13	2.44	2.40	3.98	4.21	1.72	27000	-0.26
370	39575-39520	2.0000	4.4375	1.1875	1.1830	0.9375	0.14	0.13	2.68	2.40	3.98	4.21	1.72	27000	-0.26
371	65395-65320	2.0000	4.5000	1.7500	1.7500	1.3750	0.14	0.13	2.83	2.36	3.82	4.21	1.36	35700	-0.49
372 *	619-612A	2.0000	4.7260	1.6250	1.6250	1.2500	0.14	0.13	2.64	2.40	4.06	4.33	1.86	33200	-0.55
373	619-612	2.0000	4.7500	1.6250	1.6250	1.2500	0.14	0.13	2.64	2.40	4.13	4.33	1.86	33200	-0.55
374	555-553X	2.0000	4.8125	1.5000	1.4440	1.1875	0.09	0.13	2.60	2.44	4.25	4.53	1.69	30700	-0.37
375	555-552A	2.0000	4.8750	1.5000	1.4440	1.1875	0.09	0.13	2.60	2.44	4.29	4.57	1.69	30700	-0.37
376	65200-65500	2.0000	5.0000	1.7500	1.7500	1.3750	0.14	0.13	2.95	2.72	4.21	4.69	1.20	33300	-0.37
377	28584-28512	2.0625	3.6250	0.9688	1.0000	0.7813	0.14	0.03	2.56	2.28	3.27	3.43	1.55	16000	-0.19
378	3767-3720	2.0625	3.6718	1.1875	1.1930	0.9375	0.09	0.13	2.48	2.32	3.23	3.46	1.73	19700	-0.32
379	33890-33821	2.0625	3.7500	1.0938	1.1250	0.8750	0.06	0.09	2.40	2.32	3.35	3.54	1.77	20900	-0.30
380	33891-33821	2.0625	3.7500	1.0938	1.1250	0.8750	0.14	0.09	2.60	2.32	3.35	3.54	1.77	20900	-0.30
381	466-453X	2.0625	4.1250	1.1875	1.1542	0.9687	0.06	0.13	2.44	2.36	3.62	3.86	1.74	21800	-0.28
382	LM806649-LM806610	2.1250	3.5000	0.7500	0.7500	0.5312	0.09	0.06	2.48	2.36	3.15	3.35	1.07	10600	0.09
383	33895-33821	2.1250	3.7500	1.0938	1.1250	0.8750	0.06	0.09	2.48	2.36	3.35	3.54	1.77	20900	-0.30
384	33895-33822	2.1250	3.7500	1.0938	1.1250	0.8750	0.06	0.03	2.48	2.36	3.39	3.54	1.77	20900	-0.30

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 20260-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE 1. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									db SHAFT	da SHAFT	Db HOUSING	Da HOUSING			
385	389A-382A	2.1250	3.8125	0.8268	0.8640	0.6250	0.03	0.03	2.40	2.36	3.50	3.62	1.65	14800	-0.12
386	456-453X	2.1250	4.1250	1.1875	1.1542	0.9687	0.14	0.13	2.68	2.40	3.62	3.86	1.74	21800	-0.28
387	45287-45220	2.1250	4.1250	1.1875	1.2188	0.9375	0.03	0.13	2.44	2.44	3.66	3.90	1.76	22600	-0.32
388	HM807049-HM807010	2.1250	4.1250	1.4375	1.4375	1.1250	0.14	0.13	2.87	2.48	3.50	3.94	1.20	27500	-0.29
389	HM807049A-HM807010	2.1250	4.1250	1.4375	1.4375	1.1250	0.06	0.13	2.72	2.48	3.50	3.94	1.20	27500	-0.29
390	4595-4535	2.1250	4.1250	1.5625	1.5810	1.3125	0.14	0.13	2.76	2.48	3.54	3.90	1.74	28700	-0.49
391	539-532X	2.1250	4.2500	1.4375	1.4550	1.1250	0.14	0.13	2.68	2.40	3.70	3.94	1.97	27600	-0.48
392	539A-532X	2.1250	4.2500	1.4375	1.4550	1.1250	0.22	0.13	2.83	2.40	3.70	3.94	1.97	27600	-0.48
393	539-532A	2.1250	4.3750	1.5000	1.4550	1.1875	0.14	0.13	2.68	2.40	3.74	3.94	1.97	27600	-0.48
394	39578-39520	2.1250	4.4375	1.1875	1.1875	0.9375	0.14	0.13	2.76	2.52	3.98	4.21	1.72	27000	-0.26
395	621-612	2.1250	4.7500	1.6250	1.6250	1.2500	0.14	0.13	2.76	2.48	4.13	4.33	1.86	33200	-0.55
396	5578-5535	2.1250	4.8125	1.7188	1.7230	1.4375	0.14	0.13	2.87	2.64	4.17	4.57	1.63	37700	-0.48
397	557-S-552A	2.1250	4.8750	1.5000	1.4440	1.1875	0.14	0.13	2.80	2.56	4.29	4.57	1.69	30700	-0.37
398	65212-65500	2.1250	5.0000	1.7500	1.7500	1.3750	0.14	0.13	3.03	2.80	4.21	4.69	1.20	33300	-0.37
399	6280-6220	2.1250	5.0000	2.0000	1.0625	1.6250	0.14	0.13	2.91	2.64	4.25	4.61	1.96	48500	-0.77
400	636-632	2.1250	5.3750	1.6250	1.6250	1.2500	0.14	0.13	2.87	2.64	4.65	4.92	1.61	37400	-0.44

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER db SHAFT	RECOMMENDED SHOULDER DIAMETER da SHAFT	RECOMMENDED SHOULDER DIAMETER Db HOUSING	RECOMMENDED SHOULDER DIAMETER Da HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
401	28680-28622	2.1875	3.8437	0.9688	0.9688	0.7656	0.14	0.03	2.68	2.44	3.46	3.62	1.45	16800	-0.13
402	5566-5535	2.1875	4.8125	1.7188	1.7230	1.4375	0.05	0.13	2.76	2.68	4.17	4.57	1.63	37700	-0.48
403 *	HM813840-HM813810	2.1875	5.0000	1.4375	1.4375	1.0625	0.14	0.13	2.99	2.76	4.37	4.76	1.16	31200	-0.15
404	L507949-L507910	2.2500	3.4375	0.7188	0.7188	0.5625	0.06	0.06	2.56	2.44	3.11	3.27	1.50	9400	-0.03
405	387-382A	2.2500	3.8125	0.8269	0.8640	0.6250	0.09	0.03	2.60	2.44	3.50	3.62	1.65	14800	-0.12
406	387A-382A	2.2500	3.8125	0.8268	0.8640	0.6250	0.14	0.03	2.72	2.44	3.50	3.62	1.65	14800	-0.12
407	387AS-382A	2.2500	3.8125	0.8268	0.8640	0.6250	0.20	0.03	2.83	2.44	3.50	3.62	1.65	14800	-0.12
408	387-S-382A	2.2500	3.8125	0.8268	0.8640	0.6250	0.03	0.03	2.48	2.44	3.50	3.62	1.65	14800	-0.12
409	387A-382-S	2.2500	3.8125	1.0000	0.8640	0.7982	0.14	0.09	2.72	2.44	3.50	3.58	1.65	14800	-0.12
410	28682-28622	2.2500	3.8437	0.9688	0.9688	0.7656	0.14	0.03	2.76	2.44	3.46	3.62	1.45	16800	-0.13
411	387A-382	2.2500	0.8750	0.8268	0.8640	0.7018	0.14	0.03	2.72	2.44	3.54	3.62	1.65	14800	-0.12
412	387-382	2.2500	3.8750	0.8258	0.8640	0.7018	0.09	0.03	2.60	2.44	3.54	3.62	1.65	14800	-0.12
413	387-383A	2.2500	3.9370	0.8268	0.8640	0.7018	0.14	0.08	2.72	2.44	3.50	3.66	1.65	14800	-0.12
414	462-453X	2.2500	4.1250	1.1875	1.1542	0.9687	0.09	0.13	2.64	2.48	3.62	3.86	1.74	21800	-0.28
415	469-453X	2.2500	4.1250	1.1875	1.1542	0.9687	0.14	0.13	2.76	2.48	3.62	3.86	1.74	21800	-0.28
416	45289-45220	2.2500	4.1250	1.1875	1.2188	0.9375	0.03	0.13	2.56	2.56	3.66	3.90	1.76	22600	-0.32
417	45290-45220	2.2500	4.1250	1.1875	1.2188	0.9375	0.09	0.13	2.68	2.56	3.66	3.90	1.76	22600	-0.32
418	45291-45220	2.2500	4.1250	1.1875	1.2188	0.9375	0.25	0.13	2.99	2.56	3.66	3.90	1.76	22600	-0.32
419	45291-45221	2.2500	4.1250	1.1875	1.2188	0.9375	0.25	0.03	2.99	2.56	3.74	3.90	1.76	22600	-0.32
420	469-453A	2.2500	4.2500	1.0938	1.1542	0.8750	0.14	0.03	2.76	2.48	3.82	3.94	1.74	21800	-0.28
421 *	462-454	2.2500	4.3307	1.0943	1.1542	1.0630	0.09	0.08	2.64	2.48	3.78	3.94	1.74	21800	-0.28

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	db RECOMMENDED SHOULDER DIAMETER SHAFT	da SHAFT	Db HOUSING	Da HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
422	390-394A	2.2500	4.3307	0.8661	0.8660	0.7411	0.09	0.05	2.76	2.60	3.98	4.11	1.45	16200	-0.03
423	469-454	2.2500	4.3307	1.0943	1.1542	1.0630	0.14	0.08	2.76	2.48	3.78	3.98	1.74	21800	-0.28
424	3979-3920	2.7500	4.4375	1.1875	1.1830	0.9375	0.14	0.13	2.83	2.60	3.90	4.17	1.45	22400	-0.18
425	39580-39520	2.2500	4.4375	1.1875	1.1875	0.9375	0.14	0.13	2.83	2.60	3.98	4.21	1.72	27000	-0.26
426	39581-39520	2.2500	4.4375	1.1875	1.1875	0.9375	0.31	0.13	3.19	2.60	3.98	4.21	1.72	27000	-0.26
427	33225-33462	2.2500	4.6250	1.1875	1.1875	0.9375	0.14	0.13	2.91	2.68	4.09	4.41	1.34	22300	-0.11
428	623-612	2.2500	4.7500	1.6250	1.6250	1.2500	0.14	0.13	2.83	2.60	4.13	4.33	1.86	33200	-0.55
429	555-S-552A	2.2500	4.8750	1.5000	1.4440	1.1875	0.14	0.13	2.87	2.64	4.29	4.57	1.69	30700	-0.37
430	65225-65500	2.2500	5.0000	1.7500	1.7500	1.3750	0.14	0.13	3.15	2.80	4.21	4.69	1.20	33300	-0.37
431 *	6375-6320	2.2500	5.5447	2.1250	2.2050	1.7500	0.17	0.13	3.15	2.95	5.08	5.51	1.80	51000	-0.76
432	6455-6420	2.2500	5.8750	2.1250	2.1350	1.7500	0.14	0.13	3.19	2.95	5.08	5.51	1.61	55100	-0.59
433	3981-3920	2.3125	4.4375	1.1875	1.1830	0.9375	0.14	0.13	2.87	2.64	3.90	4.17	1.45	22400	-0.18
434	28985-28919	2.3750	3.9362	0.9687	1.0000	0.7500	0.14	0.06	2.87	2.64	3.54	3.78	1.37	17200	-0.10
435	28985-28921	2.3750	3.9370	1.0000	1.0000	0.7813	0.14	0.13	2.87	2.64	3.50	3.78	1.37	17200	-0.10
436	28985-28920	2.3750	4.0000	1.0000	1.0000	0.7813	0.14	0.13	2.87	2.64	3.54	3.82	1.37	17200	-0.10
437	3980-3920	2.3750	4.4375	1.1875	1.1830	0.9375	0.14	0.13	2.95	2.68	3.90	4.17	1.45	22400	-0.18
438	HM212044-HM212010	2.3750	4.8125	1.5000	1.5100	1.1700	0.31	0.06	3.35	2.76	4.33	4.57	1.73	36100	-0.43
439	HM212044-HM212011	2.3750	4.8125	1.5000	1.5100	1.1700	0.31	0.13	3.35	2.76	4.25	4.57	1.73	36100	-0.43
440	5583-5535	2.3750	4.8125	1.7188	1.7230	1.4375	0.14	0.13	3.07	2.83	4.17	4.57	1.63	37700	-0.48
441	558-552A	2.3750	4.8750	1.5000	1.4440	1.1875	0.09	0.13	2.87	2.72	4.29	4.57	1.69	30700	-0.37

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE 1. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	db	da	Db	Da	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									RECOMMENDED SHOULDER DIAMETER						
									SHAFT		HOUSING				
442	HM813841-HM813810	2.3750	5.0000	1.4375	1.4375	1.0625	0.14	0.06	3.15	2.87	4.45	4.76	1.16	31200	-0.15
443	HM813841A-HM813810	2.3750	5.0000	1.4375	1.4375	1.0625	0.06	0.13	2.99	2.87	4.37	4.76	1.16	31200	-0.15
444	65237-65500	2.3750	5.0000	1.7500	1.7500	1.3750	0.14	0.13	3.23	2.79	4.21	4.69	1.20	33300	-0.37
445	65237A-65500	2.3750	5.0000	1.7500	1.7500	1.3750	0.06	0.13	3.07	2.79	4.21	4.69	1.20	33300	-0.37
446	637-633	2.3750	5.1250	1.6250	1.6250	1.2500	0.14	0.13	3.07	2.83	4.57	4.88	1.61	37400	-0.44
447	H715332-H715311	2.3750	5.3750	1.8125	1.8125	1.4375	0.14	0.13	3.31	3.07	4.65	5.20	1.24	43000	-0.33
448	HH814542-HH814510	2.3750	6.0000	2.0750	2.0750	1.6250	0.14	0.13	3.50	3.27	5.12	5.63	1.20	51000	-0.43
449	392-394A	2.4375	4.3307	0.8661	0.8660	0.7411	0.03	0.05	2.76	2.72	3.98	4.11	1.45	16200	-0.03
450	H715334-H715311	2.4375	5.3750	1.8125	1.8125	1.4375	0.14	0.13	3.39	3.11	4.65	5.20	1.24	43000	-0.34
451	L610549-L610510	2.5000	3.1788	0.7500	0.7500	0.5398	0.06	0.06	2.80	2.72	3.78	4.06	1.38	10900	0.02
452	LL510749-LL510710	2.5000	3.6250	0.5313	0.5000	0.3750	0.06	0.06	2.76	2.68	3.39	3.46	1.44	6400	0.12
453	L610549-L610510	2.5000	3.7188	0.7500	0.7500	0.5938	0.06	0.06	2.80	2.72	3.39	3.58	1.38	10900	0.02

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	db	da	Db	Da	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									RECOMMENDED SHOULDER DIAMETER						
									SHAFT		HOUSING				
454	39250-39412	2.5000	4.1250	0.8438	0.8661	0.6250	0.08	0.08	2.87	2.72	3.78	3.94	1.51	15800	-0.06
455	29585-29520	2.5000	4.2500	1.0000	1.0000	0.7500	0.14	0.13	3.03	2.80	3.78	4.06	1.27	14200	-0.03
456	29585-29522	2.5000	4.2500	1.0000	1.0000	0.7500	0.14	0.03	3.03	2.80	3.86	4.06	1.27	14200	-0.03
457	29586-29520	2.5000	4.2500	1.0000	1.0000	0.7500	0.06	0.13	2.87	2.80	3.75	4.06	1.27	14200	-0.03
458	390A-394A	2.5000	4.3307	0.8661	0.8661	0.7411	0.06	0.05	2.87	2.76	3.98	4.11	1.45	16200	-0.03
459	390A-394AS	2.5000	4.3307	0.8661	0.8660	0.7411	0.06	0.13	2.87	2.76	3.90	4.11	1.45	16200	-0.03
460	395-394A	2.5000	4.3307	0.8661	0.8660	0.7411	0.14	0.05	3.03	2.76	3.98	4.11	1.45	16200	-0.03
461 *	29586-29521	2.5000	4.3307	1.0000	1.0000	0.7500	0.06	0.05	2.87	2.80	3.90	4.09	1.27	14200	-0.03
462	29585-29521	2.5000	4.3307	1.0000	1.0000	0.7500	0.14	0.05	3.03	2.80	3.90	4.09	1.27	14200	-0.03
463	3982-3920	2.5000	4.4375	1.1875	1.1830	0.9375	0.14	0.13	3.03	2.80	3.90	4.17	1.45	22400	-0.18
464	39585-39520	2.5000	4.4375	1.1875	1.1875	0.9375	0.14	0.13	3.03	2.80	3.98	4.21	1.72	27000	-0.26
465	39585A-39520	2.5000	4.4375	1.1875	1.1875	0.9375	0.03	0.13	2.83	2.80	3.98	4.21	1.72	27000	-0.26
466	477-472	2.5000	4.7244	1.1730	1.1420	0.9542	0.03	0.08	2.87	2.83	4.21	4.49	1.52	23100	-0.16
467	483-472	2.5000	4.7244	1.1730	1.1420	0.9542	0.14	0.08	3.07	2.83	4.21	4.49	1.52	23100	-0.16
468	HM212046-HM212011	2.5000	4.8125	1.5000	1.5100	1.1700	0.14	0.13	3.15	2.87	4.25	4.57	1.73	36100	-0.43
469	HM212047-HM212011	2.5000	4.8125	1.5000	1.5100	1.1700	0.28	0.13	3.43	2.87	4.25	4.57	1.73	36100	-0.43
470	5584-5535	2.5000	4.8125	1.7188	1.1730	1.4375	0.14	0.13	3.19	2.95	4.17	4.57	1.63	37700	-0.48
471	559-552A	2.5000	4.8750	1.5000	1.4440	1.1875	0.14	0.13	3.07	2.83	4.29	4.57	1.69	30700	-0.37
472	565-563	2.5000	5.0000	1.4375	1.4240	1.1250	0.14	0.13	3.15	2.87	4.41	4.72	1.61	29200	-0.32
473	HM813842-HM813811	2.5000	5.0000	1.4375	1.4375	1.0625	0.14	0.06	3.23	2.99	4.45	4.76	1.16	31200	-0.15

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB)	a 3/ EFFECTIVE LOAD CENTER
									db SHAFT	da SHAFT	Db HOUSING	Da HOUSING		RADIAL	
474	HM813842-HM813810	2.5000	5.0000	1.4375	1.4375	1.0625	0.14	0.13	3.23	2.99	4.37	4.76	1.16	31200	-0.15
475	HM813842A-HM813810	2.5000	5.0000	1.4375	1.4375	1.0625	0.03	0.13	3.03	2.99	4.37	4.76	1.16	31200	-0.15
476 *	639-633	2.5000	5.1250	1.6250	1.6250	1.2500	0.14	0.13	3.19	2.91	4.57	4.88	1.61	37400	-0.44
477	6382-6320	2.5000	5.3447	2.1250	2.2050	1.7500	0.17	0.13	3.31	3.03	4.61	4.96	1.80	51000	-0.76
478	639-632	2.5000	5.3750	1.6250	1.6250	1.2500	0.14	0.13	3.19	2.91	4.65	4.92	1.61	37400	-0.44
479	H414235-H414210	2.5000	5.3750	1.6250	1.6250	1.2500	0.14	0.13	3.23	3.07	4.76	5.06	1.62	41800	-0.43
480	H715336-H715311	2.5000	5.3750	1.8125	1.8125	1.4375	0.14	0.13	3.43	3.15	4.65	5.20	1.24	43000	-0.33
481 *	6475-6420	2.5000	5.8750	2.1250	2.1350	1.7500	0.14	0.13	3.39	3.15	5.08	5.51	1.61	55100	-0.59
482	569-563	2.5578	5.0000	1.4375	1.4240	1.1250	0.14	0.13	3.19	2.91	4.41	4.72	1.61	29200	-0.32
483	6379-6320	2.5625	5.3447	2.1250	2.2050	1.7500	0.14	0.13	3.31	3.04	4.61	4.96	1.80	51000	-0.76

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE–CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB)	a 3/ EFFECTIVE LOAD CENTER
									SHAFT		HOUSING			RADIAL	
									db	da	Db	Da			
484	H715340–H715311	2.5625	5.3750	1.8125	1.8125	1.4375	0.14	0.13	3.46	3.23	4.65	5.20	1.24	43000	–0.33
485	L812148–L812111	2.6250	4.0635	0.6930	0.6930	0.4720	0.06	0.03	2.91	2.83	3.78	3.90	1.20	11500	–0.14
486	29590–29520	2.6250	4.2500	1.0000	1.0000	0.7500	0.14	0.13	3.15	2.87	3.78	4.06	1.27	14200	–0.03
487	3984–3921XA	2.6250	4.3301	1.1713	1.1830	0.9375	0.14	0.02	3.15	2.91	3.94	4.12	1.45	22400	–0.18
488	395A–394A	2.6250	4.3307	0.8661	0.8660	0.7411	0.03	0.05	2.87	2.87	3.98	4.11	1.45	16200	–0.03
489	395–S–394A	2.6250	4.3307	0.8661	0.8660	0.7411	0.14	0.05	3.11	2.87	3.98	4.11	1.45	16200	–0.03
490	3984–3920	2.6250	4.4375	1.1875	0.1830	0.9375	0.14	0.13	3.15	2.91	3.90	4.17	1.45	22400	–0.18
491	3984–3925	2.6250	4.4375	1.1875	0.1830	0.9375	0.14	0.03	3.15	2.91	3.98	4.17	1.45	22400	–0.18
492 *	3994–3920	2.6250	4.4375	1.1875	0.1830	0.9375	0.22	0.13	3.31	2.91	3.90	4.17	1.45	22400	–0.18
493	39590–39520	2.6250	4.4375	1.1875	1.1875	0.9375	0.14	0.13	3.15	2.91	3.98	4.21	1.72	27000	–0.26
494	39590–39521	2.6250	4.4375	1.1875	1.1875	0.9375	0.14	0.03	3.15	2.91	4.06	4.21	1.72	27000	–0.26
495	39591–39520	2.6250	4.4375	1.1875	1.1875	0.9375	0.22	0.13	3.31	2.91	3.98	4.21	1.72	27000	–0.26
496	3984–3926	2.6250	4.4375	1.3125	1.1830	1.0625	0.14	0.13	3.15	2.91	3.86	4.17	1.45	22400	–0.18
497	33262–33462	2.6250	4.6250	1.1875	1.1875	0.9375	0.14	0.13	3.19	2.95	4.09	4.41	1.34	22300	–0.11
498	560–553X	2.6250	4.8125	1.5000	1.4440	1.1875	0.14	0.13	3.19	2.95	4.25	4.53	1.69	30700	–0.37
499	HM212049–HM212010	2.6250	4.8125	1.5000	1.5100	1.1700	0.14	0.06	3.23	2.97	4.33	4.57	1.73	36100	–0.43
500	HM212049–HM212011	2.6250	4.8125	1.5000	1.5100	1.1700	0.14	0.13	3.23	2.97	4.25	4.57	1.73	36100	–0.43

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	r 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									SHAFT		HOUSING				
									db	da	Db	Da			
501	HM212049X-HM212011	2.6250	4.8125	1.5000	1.5100	1.1700	0.28	0.13	3.50	2.97	4.25	4.57	1.73	36100	-0.43
502	560-552A	2.6250	4.8750	1.5000	1.4440	1.1875	0.14	0.13	3.19	2.85	4.29	4.57	1.69	30700	-0.37
503	HM813844-HM813810	2.6250	5.0000	1.4375	1.4375	1.0625	0.14	0.13	3.35	3.07	4.37	4.76	1.16	31200	-0.15
504	HM813844-HM813811	2.6250	5.0000	1.4375	1.4375	1.0625	0.14	0.06	3.35	3.07	4.45	4.76	1.16	31200	-0.15
505	641-633	2.6250	5.1250	1.6250	1.6250	1.2500	0.14	0.13	3.27	3.03	4.57	4.88	1.61	37400	-0.44
506	6386-6320	2.6250	5.3447	2.1250	2.2050	1.7500	0.17	0.13	3.43	3.04	4.61	4.96	1.80	51000	-0.76
507	6389-6320	2.6250	5.3447	2.1250	2.2050	1.7500	0.25	0.13	3.58	3.04	4.61	4.96	1.80	51000	-0.76
508	641-632	2.6250	5.3750	1.6250	1.6250	1.2500	0.14	0.13	3.27	3.03	4.65	4.92	1.61	37400	-0.44
509	H414242-H414210	2.6250	5.3750	1.6250	1.6250	1.2500	0.14	0.13	3.35	3.19	4.76	5.08	1.62	41800	-0.43
510	H715341-H715311	2.6250	5.3750	1.8125	1.8125	1.4375	0.14	0.13	3.50	3.27	4.65	5.20	1.24	43000	-0.34
511	399A-394A	2.6875	4.3307	0.8661	0.8660	0.7411	0.09	0.05	3.07	2.91	3.98	4.11	1.45	16200	-0.03
512	399AS-394A	2.6875	4.3307	0.8661	0.8660	0.7411	0.20	0.05	3.27	2.91	3.98	4.11	1.45	16200	-0.03
513	33269-33462	2.6875	4.6250	1.1875	1.1875	0.9375	0.14	0.13	3.23	2.99	4.09	4.41	1.34	22300	-0.11
514	480-472	2.6875	4.7244	1.1730	1.1420	0.9542	0.14	0.08	3.23	2.95	4.21	4.49	1.52	23100	-0.16
515	480-472A	2.6875	4.7244	1.1418	1.1420	0.9230	0.14	0.13	3.23	2.95	4.17	4.49	1.52	23100	-0.16
516	560-S-552A	2.6875	4.8750	1.5000	1.4440	1.1875	0.14	0.13	3.27	2.99	4.29	4.57	1.69	30700	-0.37
517	560-S-553X	2.6875	4.8125	1.5000	1.4440	1.1875	0.14	0.13	3.27	2.99	4.25	4.53	1.69	30700	-0.37
518	570-563	2.6875	5.0000	1.4375	1.4240	1.1250	0.14	0.13	3.27	3.03	4.41	4.72	1.69	30700	-0.32
519	H414245-H414210	2.6875	5.3750	1.6250	1.6250	1.2500	0.14	0.13	3.39	3.23	4.76	5.08	1.62	41800	-0.43
520	H715343-H715311	2.6875	5.3750	1.8126	1.8125	1.4375	0.14	0.13	3.54	3.31	4.65	5.20	1.24	43000	-0.34
521	H715343-H715310	2.6875	5.5000	1.8125	1.8125	1.4375	0.14	0.13	3.54	3.31	4.72	5.24	1.24	43000	-0.33
522	LL713149-LL713110	2.7500	3.9062	0.8693	0.6299	0.6118	0.06	0.06	3.03	2.95	3.68	3.74	1.26	8000	0.18
523	L713049-L713010	2.7500	4.0000	0.7500	0.7500	0.5038	0.06	0.06	3.07	2.95	3.68	2.86	1.27	10900	0.10

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB)	a 3/ EFFECTIVE LOAD CENTER
									db	da	Db	Da		RADIAL	
									SHAFT		HOUSING				
524	LM613449-LM613410	2.7500	4.4375	0.8750	0.8660	0.6250	0.06	0.03	3.07	2.99	4.09	4.21	1.40	16400	0.00
525	29675-29620	2.7500	4.4375	1.0000	1.0000	0.7500	0.06	0.13	3.15	3.03	3.98	4.29	1.20	18000	0.04
526	33275-33462	2.7500	4.6250	1.1875	0.1875	0.9375	0.14	0.13	3.31	3.03	4.09	4.41	1.34	22300	-0.11
527	482-472A	2.7500	4.7244	1.1418	1.1420	0.9230	0.14	0.13	3.27	3.03	4.17	4.49	1.52	23100	-0.16
528	482-472	2.7500	4.7244	1.1730	1.1420	0.9542	0.14	0.06	3.27	3.03	4.21	4.49	1.52	23100	-0.16
529	47487-47420	2.7500	4.7244	1.2813	1.2813	1.0313	0.14	0.13	3.31	3.07	4.21	4.49	1.62	28800	-0.25
530	47487-47420A	2.7500	4.7244	1.2813	1.2813	1.0313	0.14	0.02	3.31	3.07	4.29	4.49	1.62	28800	-0.25
531	29675-29630	2.7500	4.7500	1.0000	1.0000	0.7500	0.06	0.13	3.15	3.03	4.09	4.45	1.20	18000	0.04
532	566-563	2.7500	5.0000	1.4375	1.4240	1.1250	0.14	0.13	3.35	3.07	4.41	4.72	1.69	30700	-0.32
533	HM813846-HM813811	2.7500	5.0000	1.4375	1.4375	1.0625	0.14	0.06	3.46	3.19	4.45	4.76	1.16	31200	-0.15
534	643-633	2.7500	5.1250	1.6250	1.6250	1.2500	0.14	0.13	3.39	3.15	4.57	4.88	1.61	37400	-0.44
535	643-632	2.7500	5.3750	1.6250	1.6250	1.2500	0.14	0.13	3.39	3.15	4.65	4.92	1.61	37400	-0.44
536	655-653	2.7500	5.7500	1.6250	1.6250	1.2500	0.14	0.13	3.46	3.23	5.16	5.47	1.43	39600	-0.31
537 *	6454-6420	2.7500	5.8750	2.1250	2.1350	1.7500	0.20	0.13	3.70	3.35	5.08	5.51	1.61	55100	-0.59
538	745A-742	2.7500	5.9090	1.7500	1.8375	1.4375	0.14	0.13	3.46	3.23	5.28	5.59	1.80	50800	-0.47
539	835-832	2.7500	6.6260	2.1250	2.2190	1.6250	0.14	0.13	3.58	3.31	5.87	6.10	1.95	65100	-0.73
540	34274-3478	2.7540	4.7812	0.9688	0.9060	0.6875	0.08	0.08	3.19	3.07	4.33	4.57	1.30	16600	0.06

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									SHAFT		HOUSING				
									db	da	Db	Da			
541	33281-33462	2.8125	4.6250	1.1875	1.1875	0.9375	0.14	0.13	3.35	3.11	4.09	4.41	1.34	22300	-0.11
542	47490-47420	2.8125	4.7244	1.2813	1.2813	1.0313	0.14	0.13	3.39	3.11	4.21	4.49	1.62	28800	-0.25
543	567A-563	2.8125	5.0000	1.4375	1.4240	1.1250	0.14	0.13	3.39	3.15	4.41	4.72	1.69	30700	-0.32
544	HM813849-HM813810	2.8125	5.0000	1.4375	1.4375	1.0625	0.14	0.13	3.50	3.22	4.37	4.76	1.16	31200	-0.15
545	495-S-493	2.8125	5.3750	1.1875	1.1720	0.8750	0.14	0.13	3.46	3.23	4.80	5.12	1.31	25000	-0.03
546	644-632	2.8125	5.3750	1.6250	1.6250	1.2500	0.14	0.13	3.43	3.19	4.65	4.92	1.61	37400	-0.44
547	H414249-H414210	2.8125	5.3750	1.6250	1.6250	1.2500	0.14	0.13	3.50	3.28	4.76	5.08	1.62	41800	-0.43
548	H715345-H715311	2.8125	5.3750	1.8125	1.8125	1.4375	0.14	0.13	3.66	3.43	4.65	5.20	1.24	43000	-0.34
549 *	H715345-H715310	2.8125	5.5000	1.8125	1.8125	1.4375	0.14	0.13	3.66	3.43	4.72	5.24	1.24	43000	-0.33
550	29685-29620	2.8750	4.4375	1.0000	1.0000	0.7500	0.14	0.13	3.39	3.15	3.98	4.29	1.20	18000	0.04
551	33287-33462	2.8750	4.6250	1.1875	1.1875	0.9375	0.14	0.13	3.43	3.15	4.09	4.49	1.34	22300	-0.11
552	33287-33472	2.8750	4.7244	1.1730	1.1875	0.9230	0.14	0.03	3.43	3.15	4.21	4.45	1.34	22300	-0.11
553	27680-27620	2.8750	4.9375	1.0000	1.0000	0.7813	0.14	0.06	3.46	3.23	4.53	4.72	1.40	19000	0.02
554	567-563	2.8750	5.0000	1.4375	1.4240	1.1250	0.14	0.13	3.46	3.19	5.50	4.72	1.69	30700	-0.32
555	576-572	2.8750	5.5115	1.4375	1.4212	1.1250	0.14	0.13	3.54	3.27	4.92	5.24	1.45	29800	-0.21
556	657-653	2.8750	5.7500	1.6250	1.6250	1.2500	0.14	0.13	3.58	3.35	5.16	5.47	1.43	39600	-0.31
557	6460-6420	2.8750	5.8750	2.1250	2.1350	1.7500	0.14	0.13	3.66	3.43	5.08	5.51	1.61	55100	-0.59
558	744-742	2.8750	5.9090	1.7500	1.8375	1.4375	0.14	0.13	3.58	3.35	5.28	5.59	1.80	50800	-0.47
559	762-752	2.8750	6.3750	1.8750	1.9000	1.5000	0.14	0.13	3.62	3.82	5.67	5.91	1.71	52300	-0.47
560	577-572	2.9375	5.5115	1.4375	1.4212	1.1250	0.14	1.50	3.58	3.35	4.92	5.24	1.45	29800	-0.21

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB)	a 3/ EFFECTIVE LOAD CENTER
									db	da	Db	Da		RADIAL	
									SHAFT		HOUSING				
561	LL714649-LL714610	3.0000	4.1563	0.5313	0.5313	0.3750	0.06	0.06	3.27	3.19	3.90	4.02	1.24	6800	0.26
562	L814749-L814710	3.0000	4.3125	0.7500	0.7500	0.5938	0.06	0.06	3.31	3.23	3.94	4.13	1.16	11300	0.20
563	34300-34478	3.0000	4.7812	0.9688	0.9060	0.6875	0.08	0.08	3.39	3.27	4.33	4.57	1.30	16600	0.06
564	34301-34478	3.0000	4.7812	0.9688	0.9060	0.6875	0.14	0.08	3.50	3.27	4.33	4.57	1.30	16600	0.06
565	27684-27620	3.0000	4.9375	1.0000	1.0000	0.7813	0.14	0.06	3.58	3.31	4.53	4.72	1.40	19000	0.02
566	42687-42620	3.0000	5.0000	1.1875	1.2205	0.8750	0.14	0.13	3.54	3.31	4.49	4.76	1.39	26100	-0.11
567	42688-42620	3.0000	5.0000	1.1875	1.2205	0.8750	0.25	0.13	3.78	3.31	4.49	4.76	1.39	26100	-0.11
568	47678-47620	3.0000	5.2500	1.3125	1.3125	1.0313	0.25	0.13	3.82	3.35	4.69	5.04	1.44	29100	-0.17
569	47679-47620	3.0000	5.2500	1.3125	1.3125	1.0313	0.14	0.13	3.58	3.35	4.69	5.04	1.44	29100	-0.17
570	47680-47620	3.0000	5.2500	1.3125	1.3125	1.0313	0.03	0.13	3.39	3.35	4.69	5.04	1.44	29100	-0.17
571	HM516442-HM516410	3.0000	5.2500	1.5625	1.5625	1.2813	0.14	0.13	3.66	3.43	4.65	5.04	1.45	35000	-0.29
572	5760-5735	3.0000	5.3438	1.7500	1.8150	1.3750	0.14	0.13	3.70	3.46	4.69	5.12	1.44	40600	-0.46
573	495A-493	3.0000	5.3750	1.1875	1.1720	0.8750	0.14	0.13	3.62	3.39	4.80	5.12	1.31	25000	-0.03
574	495AX-493	3.0000	5.3750	1.1875	1.1720	0.8750	0.25	0.13	3.86	3.39	4.80	5.12	1.31	25000	-0.03
575	575-572	3.0000	5.5115	1.4375	1.4212	1.1250	0.14	0.13	3.62	3.39	4.92	5.24	1.45	29800	-0.21
576	575-S-572	3.0000	5.5115	1.4375	1.4212	1.1250	0.27	0.13	3.90	3.39	4.92	5.24	1.45	29800	-0.21
577	659-653	3.0000	5.7500	1.6250	1.6250	1.2500	0.14	0.13	3.66	3.43	5.16	5.47	1.43	39600	-0.31
578	6461-6420	3.0000	5.8750	2.1250	2.1350	1.7500	0.14	0.13	3.78	3.52	5.08	5.51	1.61	55100	-0.59
579	6461A-6420	3.0000	5.8750	2.1250	2.1350	1.7500	0.38	0.13	4.25	3.52	5.08	5.51	1.61	55100	-0.59
580	748-S-742	3.0000	5.9090	1.7500	1.8375	1.4375	0.14	0.13	3.66	3.43	5.28	5.59	1.80	50600	-0.47
581	590A-592A	3.0000	6.0000	1.5625	1.4300	1.1875	0.14	0.13	3.74	3.50	5.31	5.67	1.32	34800	-0.10
582	659-652	3.0000	6.0000	1.6250	1.6250	1.2500	0.14	0.13	3.66	3.43	5.28	5.55	1.71	52300	-0.31

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB)	a 3/ EFFECTIVE LOAD CENTER
									db SHAFT	da SHAFT	Db HOUSING	Da HOUSING		RADIAL	
583	755-752	3.0000	6.3750	1.8750	1.9000	1.5000	0.14	0.13	3.74	3.46	5.67	5.91	1.71	52300	-0.47
584	6575-6535	3.0000	6.3750	2.1250	2.1693	1.6875	0.25	0.13	4.09	3.62	5.55	6.06	1.46	51900	-0.52
585	6576C-6535	3.0000	6.3750	2.1250	2.1693	1.6875	0.14	0.13	3.90	3.62	5.55	6.06	1.46	51900	-0.52
586	6576-6535	3.0000	6.3750	2.1250	2.1693	1.6875	0.14	0.13	3.90	3.62	5.55	6.06	1.46	51900	-0.52
587	843-832	3.0000	6.6250	2.1250	2.2190	1.6250	0.25	0.13	3.96	3.50	5.87	6.19	1.95	65100	-0.73
588	HH221430-HH221410	3.0000	7.50000	2.2500	2.2650	1.8125	0.14	0.13	3.98	3.74	6.73	7.05	1.74	85200	-0.59
589	LM814849-LM814810	3.0625	4.6250	1.0000	1.0000	0.7500	0.14	0.13	3.58	3.35	4.13	4.45	1.15	19200	0.09
590	34306-34478	3.0625	4.7812	0.9688	0.9060	0.6875	0.14	0.08	3.54	3.31	4.33	4.57	1.30	16600	0.06
591	34307-34478	3.0625	4.7812	0.9688	0.9060	0.6875	0.25	0.08	3.78	3.31	4.33	4.57	1.30	16600	0.06
592	42690-42620	3.0625	5.0000	1.1875	1.2205	0.8750	0.14	0.13	3.58	3.35	4.49	4.76	1.39	26100	-0.11
593	5795-5735	3.0625	5.3438	1.7500	1.8150	1.3750	0.14	0.13	3.78	3.50	4.69	5.12	1.44	40800	-0.46
594	495AS-493	3.0625	5.3750	1.1875	1.1720	0.8750	0.14	0.13	3.86	3.43	4.80	5.12	1.31	25000	-0.03
595	H715348-H715311	3.0625	5.3750	1.1875	1.8125	1.4375	0.14	0.13	3.86	3.48	4.65	5.20	1.24	43000	-0.34
596	H816249-H816210	3.0625	6.4951	1.9488	1.8208	1.4272	0.14	0.13	4.02	3.64	5.67	6.08	1.14	56200	-0.25
597	661-653	3.1250	5.7500	1.6250	1.6250	1.2500	0.14	0.13	3.78	3.54	5.16	5.47	1.43	39600	-0.31
598	750-742	3.1250	5.9090	1.7500	1.8375	1.4375	0.14	0.13	3.78	3.54	5.28	5.59	1.80	50800	-0.47
599	756A-752	3.1250	6.3750	1.8750	1.9000	1.5000	0.31	0.13	4.17	3.58	5.67	5.91	1.71	52300	-0.47
600	HH221431-HH221410	3.1250	7.5000	2.2500	2.2650	1.8125	0.14	0.13	4.06	3.82	6.73	7.05	1.74	85200	-0.59

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB)	a 3/ EFFECTIVE LOAD CENTER
									SHAFT		HOUSING			RADIAL	
									db	da	Db	Da			
601	47681-47620	3.1875	5.2500	1.3125	1.3125	1.0313	0.14	0.13	3.74	3.50	4.69	5.04	1.44	29100	-0.17
602	496-493	3.1875	5.3750	1.1875	1.1720	0.8750	0.14	0.13	3.74	3.50	4.80	5.12	1.31	25000	-0.03
603	581-572	3.1875	5.5115	1.4375	1.4212	1.1250	0.14	0.13	3.78	3.54	4.92	5.24	1.45	29800	-0.21
604	740-742	3.1875	5.9090	1.7500	1.8375	1.4375	0.20	0.13	3.98	3.58	5.28	5.59	1.80	50800	-0.47
605	L116149-L116110	3.2500	4.5625	0.8125	0.8438	0.6563	0.06	0.06	3.54	3.46	4.25	4.37	1.90	9200	-0.05
606	27687-27620	3.2500	4.9375	1.0000	1.0000	0.7813	0.14	0.06	3.78	3.50	4.53	4.72	1.40	19000	0.02
607	495-492A	3.2500	5.2500	1.1875	1.1720	0.8750	0.14	0.13	3.82	3.54	4.72	5.04	1.31	22400	-0.03
608	47686-47620	3.2500	5.2500	1.3125	1.3125	1.0313	0.14	0.13	3.82	3.54	4.69	5.04	1.44	29100	-0.17
609	47686-47620A	3.2500	5.2500	1.3125	1.3125	1.0313	0.14	0.03	3.82	3.54	4.76	5.04	1.44	29100	-0.17
610	47687-47620	3.2500	5.2500	1.3125	1.3125	1.0313	0.27	0.13	4.06	3.54	4.69	5.04	1.44	29100	-0.17
611	HM516448-HM516410	3.2500	5.2500	1.5625	1.5625	1.2813	0.27	0.13	4.13	3.62	4.65	5.04	1.45	35000	-0.29
612	HM516449C-HM516410	3.2500	5.2500	1.5625	1.5625	1.2813	0.14	0.13	3.90	3.62	4.65	5.04	1.45	35000	-0.29
613	495-493	3.2500	5.3750	1.1875	1.1720	0.8750	0.14	0.13	3.82	3.54	4.80	5.12	1.31	25000	-0.03
614	580-572	3.2500	5.5115	1.4375	1.4212	1.1250	0.14	0.13	3.86	3.58	4.92	5.24	1.45	29800	-0.21
615	582-572	3.2500	5.5115	1.4375	1.4212	1.1250	0.27	0.13	4.09	3.58	4.92	5.24	1.45	29800	-0.21
616	663-653	3.2500	5.7500	1.6250	1.6250	1.2500	0.14	0.13	3.90	3.62	5.16	5.47	1.43	39600	-0.31
617	749A-742	3.2500	5.9090	1.7500	1.8375	1.4375	0.14	0.13	3.90	3.66	5.28	5.59	1.80	50800	-0.47
618	750A-742	3.2500	5.9090	1.7500	1.8375	1.4375	0.27	0.13	4.17	3.66	5.28	5.59	1.80	50800	-0.47
619	595-592A	3.2500	6.0000	1.5625	1.4300	1.1875	0.14	0.13	3.94	3.66	5.31	5.67	1.32	34800	-0.10
620	663-652	3.2500	6.0000	1.6250	1.6250	1.2500	0.14	0.13	3.90	3.62	5.28	5.55	1.43	39600	-0.31
621	757-752	3.2500	6.3750	1.8750	1.9000	1.5000	0.14	0.13	3.94	3.70	5.67	5.91	1.71	52300	-0.47

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	r 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									SHAFT		HOUSING				
									db	da	Db	Da			
622	6559C-6535	3.2500	6.3750	2.1250	2.1693	1.6875	0.14	0.13	4.09	3.86	5.55	6.06	1.46	51900	-0.52
623	842-832	3.2500	6.6250	2.1250	2.2190	1.6250	0.14	0.13	3.98	3.70	5.87	6.10	1.95	65100	-0.73
624	27690-27620	3.2813	4.9375	1.0000	1.0000	0.7813	0.14	0.06	3.78	3.54	4.53	4.72	1.40	19000	0.02
625	498-493	3.3125	5.3750	1.1875	1.1720	0.8750	0.14	0.13	3.86	3.58	4.80	5.12	1.31	25000	-0.03
626	749-742	3.3475	5.9090	1.7500	1.8375	1.4375	0.14	0.13	3.98	3.74	5.28	5.59	1.80	50800	-0.47
627	497-492A	3.3750	5.2500	1.1875	1.1720	0.8750	0.14	0.13	3.90	3.66	4.72	5.04	1.31	25000	-0.03
628	497-493	3.3750	5.3750	1.1875	1.1720	0.8750	0.14	0.13	3.90	3.66	4.80	5.12	1.31	25000	-0.03
629	497A-493	3.3750	5.3750	1.1875	1.1720	0.8750	0.25	0.13	4.13	3.66	4.80	5.12	1.31	25000	-0.03
630 *	HM617049-HM617010	3.3750	5.5960	1.6875	1.6875	1.3438	0.19	0.12	4.17	3.75	4.92	5.39	1.35	41800	-0.13
631	665-653	3.3750	5.7500	1.6250	1.6250	1.2500	0.14	0.13	4.02	3.74	5.16	5.47	1.43	39600	-0.31
632	665A-653	3.3750	5.7500	1.6250	1.6250	1.2500	0.25	0.13	4.21	3.74	5.16	5.47	1.43	39600	-0.31
633	596-592A	3.3750	6.0000	1.5625	1.4300	1.1875	0.14	0.13	4.02	3.78	5.31	5.67	1.32	34800	-0.10
634	758-752	3.3750	6.3750	1.8750	1.9000	1.5000	0.14	0.13	4.06	3.82	5.67	5.91	1.71	52300	-0.47
635	677-672	3.3750	6.6250	1.6250	1.6250	1.1875	0.14	0.13	4.13	3.90	5.87	6.30	1.24	39800	-0.11
636	841-832	3.3750	6.6250	2.1250	2.2190	1.6250	0.14	0.13	4.09	3.82	5.87	6.10	1.95	65100	-0.73
637	42346-42584	3.4630	5.8437	1.1250	1.1406	0.8438	0.12	0.12	4.06	3.86	5.28	5.59	1.19	26400	0.12
638	LL217849-LL217810	3.5000	4.7812	0.5938	0.5938	0.4375	0.06	0.06	3.82	3.70	4.53	4.81	1.77	9800	0.12

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER db SHAFT	RECOMMENDED SHOULDER DIAMETER da SHAFT	RECOMMENDED SHOULDER DIAMETER Db HOUSING	RECOMMENDED SHOULDER DIAMETER Da HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
639	L217849-L217810	3.5000	4.8750	0.8125	0.8125	0.6563	0.06	0.06	3.82	3.70	4.57	4.69	1.77	9800	0.12
640	42350-42584	3.5000	5.8437	1.1250	1.1406	0.8438	0.12	0.12	4.09	3.86	5.28	5.59	1.19	26400	0.12
641	42350-42587	3.5000	5.8750	1.2500	1.1406	0.9688	0.12	0.13	4.09	3.86	5.28	5.63	1.19	26400	0.12
642	593-592A	3.5000	6.0000	1.5625	1.4300	1.1875	0.14	0.13	4.09	3.88	5.31	5.67	1.32	34800	-0.10
643	593A-592A	3.5000	6.0000	1.5625	1.4300	1.1875	0.25	0.13	4.33	3.86	5.31	5.67	1.32	34800	-0.10
644	759-752	3.5000	6.3750	1.8750	1.9000	1.5000	0.14	0.13	4.17	3.90	5.67	5.91	1.71	52300	-0.47
645	766-752	3.5000	6.3750	1.8750	1.9000	1.5000	0.28	0.13	4.45	3.90	5.67	5.91	1.71	52300	-0.47
646	6580-6535	3.5000	6.3750	2.1250	2.1693	1.6875	0.14	0.13	4.29	4.01	5.55	6.06	1.46	51900	0.52
647	679-672	3.5000	6.6250	1.6250	1.6250	1.1875	0.14	0.13	4.21	3.98	5.87	6.30	1.24	39800	-0.11
648	850-832	3.5000	6.6250	2.1250	2.2190	1.6250	0.14	0.13	4.17	3.94	5.87	6.10	1.95	65100	-0.73
649	77350-77675	3.5000	6.7500	1.8750	1.9000	1.5000	0.20	0.13	4.33	3.93	6.02	6.34	1.59	54300	-0.38
650	855-854	3.5000	7.5000	2.2500	2.2650	1.7500	0.31	0.13	4.65	4.06	6.69	6.85	1.74	73200	-0.60
651	HH221434-HH221410	3.5000	7.5000	2.2500	2.2650	1.8125	0.31	0.13	4.72	4.13	6.73	7.05	1.74	85200	-0.59
652	HM218248-HM218210	3.5433	5.7874	1.5748	1.5748	1.2795	0.28	0.14	4.41	3.90	5.24	5.55	1.76	43900	-0.34
653	760-752	3.5625	6.3750	1.8750	1.9000	1.5000	0.14	0.13	4.21	3.98	5.67	5.91	1.71	52300	-0.47
654	47890-47820	3.6250	5.7500	1.3125	1.3750	1.0313	0.14	0.13	4.21	3.98	5.16	5.51	1.30	31800	-0.04
655	598-592A	3.6250	6.0000	1.5625	1.4300	1.1875	0.14	0.13	4.21	3.98	5.31	5.67	1.32	34800	-0.10
656	598A-592A	3.6250	6.0000	1.5625	1.4300	1.1875	0.25	0.13	4.45	3.98	5.31	5.67	1.32	34800	0.10
657	681-672	3.6250	6.6250	1.6250	1.6250	1.1875	0.14	0.13	4.33	4.09	5.87	6.30	1.24	39800	-0.11
658	681A-672	3.6250	6.6250	1.6250	1.6250	1.1875	0.25	0.13	4.57	4.09	5.87	6.30	1.24	39800	-0.11

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	db	da	Db	Da	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									RECOMMENDED SHOULDER DIAMETER						
									SHAFT		HOUSING				
659	77362-77675	3.6250	6.7500	1.8750	1.9000	1.5000	0.14	0.13	4.29	4.06	6.02	6.34	1.59	54300	-0.38
660	778-772	3.6250	7.1250	1.8750	1.8900	1.5000	0.14	0.13	4.37	4.13	6.34	6.61	1.51	51400	-0.32
661	857-854	3.6250	7.5000	2.2500	2.2650	1.7500	0.31	0.13	4.76	4.17	6.69	6.85	1.74	73200	-0.60
662	42368-42584	3.6875	5.8437	1.1250	1.1406	0.8438	0.12	0.12	4.21	4.02	5.28	5.59	1.19	26400	0.12
663	LL319349-LL319310	3.7500	5.0625	0.6250	0.5938	0.4688	0.06	0.06	4.06	3.94	4.80	4.88	1.66	6400	0.17
664	L319249-L319210	3.7500	5.1250	0.8125	0.8438	0.6563	0.06	0.06	4.06	3.98	4.80	4.92	1.67	15600	0.05
665	47896-47820	3.7500	5.7500	1.3125	1.3750	1.0313	0.14	0.13	4.33	4.06	5.16	5.51	1.30	31800	-0.04
666	594A-592XE	3.7500	5.8125	1.4062	1.4300	1.0312	0.14	0.03	4.33	4.09	5.31	5.59	1.32	34800	-0.10
667	594A-592XS	3.7500	5.8125	1.4062	1.4300	1.0312	0.20	0.13	4.45	4.09	5.24	5.59	1.32	34800	-0.10
668	42375-42584	3.7500	5.8437	1.1250	1.1406	0.8438	0.12	0.12	4.25	4.06	5.28	5.59	1.19	26400	0.12
669	594-592A	3.7500	6.0000	1.5625	1.4300	1.1875	0.14	0.13	4.33	4.09	5.31	5.67	1.32	34800	-0.10
670	594A-592A	3.7500	6.0000	1.5625	1.4300	1.1875	0.20	0.13	4.45	4.09	5.31	5.67	1.32	34800	-0.10
671	52375-52618	3.7500	6.1875	1.4375	1.4219	1.0313	0.14	0.13	4.41	4.13	5.59	5.98	1.23	36100	-0.01
672	683-672	3.7500	6.6250	1.6250	1.6250	1.1875	0.14	0.13	4.45	4.17	5.87	6.30	1.24	39800	-0.11
673	683XA-672	3.7500	6.6250	1.6250	1.6250	1.1875	0.20	0.13	4.57	4.17	5.87	6.30	1.24	39800	-0.11
674	77375-77675	3.7500	6.7500	1.8750	1.9000	1.5000	0.14	0.13	4.45	4.17	6.02	6.34	1.59	54300	-0.38
675	776-772	3.7500	7.1250	1.8750	1.8900	1.5000	0.14	0.13	4.49	4.21	6.34	6.61	1.51	51400	-0.32
676	864-854	3.7500	7.5000	2.2500	2.2650	1.7500	0.31	0.13	4.84	4.25	6.69	6.85	1.74	73200	-0.60
677	HH221440-HH221410	3.7500	7.5000	2.2500	2.2650	1.8125	0.31	0.13	4.92	4.33	6.73	7.05	1.74	85200	-0.59

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	db	da	Db	Da	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									RECOMMENDED SHOULDER DIAMETER						
									SHAFT		HOUSING				
678 *	HH221440-75 HH221416	3.7500	7.8750	2.4375	2.2650	2.0000	0.31	0.13	4.92	4.33	6.87	7.05	1.74	85200	-0.59
679	42381-42584	3.8125	5.8437	1.1250	1.1406	0.8438	0.14	0.12	4.33	4.09	5.28	5.59	1.19	26400	0.12
680	52387-52618	3.8750	6.1875	1.4375	1.4219	1.0313	0.14	0.13	4.49	4.25	5.59	5.98	1.23	36100	-0.01
681	685-672	3.8750	6.6250	1.6250	1.6250	1.1875	0.14	0.13	4.57	4.29	5.87	6.30	1.24	39800	-0.11
682	779-772	3.8750	7.1250	1.8750	1.8900	1.5000	0.14	0.13	4.57	4.33	6.34	6.61	1.51	51400	-0.32
683	HH421246C-HH421210	3.8750	7.2500	2.5000	2.5000	2.0625	0.25	0.13	5.00	4.63	6.42	6.93	1.56	84200	-0.66
684	866-854	3.8750	7.5000	2.2500	2.2650	1.7500	0.14	0.13	4.65	4.37	6.69	6.85	1.74	73200	-0.60
685	HH221442-HH221410	3.8750	7.5000	2.2500	2.2650	1.8125	0.14	0.13	4.69	4.45	6.73	7.05	1.74	85200	-0.59
686	783-772	3.9370	7.1250	1.8750	1.8900	1.5000	0.14	0.13	4.65	4.37	6.34	6.61	1.51	51400	-0.32
687	52393-52618	3.9375	6.1875	1.4375	1.4219	1.0313	0.14	0.13	4.57	4.29	5.59	5.98	1.23	36100	-0.01
688	LL420549-LL420510	4.0000	5.3125	0.6250	0.5938	0.4688	0.06	0.06	4.29	4.21	5.04	5.12	1.58	10700	0.22
689	L420449-L420410	4.0000	5.3750	0.8438	0.8438	0.6563	0.06	0.06	4.29	4.21	5.04	5.20	1.59	16000	0.11
690	L521945-L521910	4.0000	5.7500	0.8438	0.8438	0.6563	0.06	0.06	4.41	4.29	5.35	5.55	1.49	15700	0.19
691	52400-52618	4.0000	6.1875	1.4375	1.4219	1.0313	0.14	0.13	4.61	4.37	5.59	5.98	1.23	36100	-0.01
692	52400-52637	4.0000	6.3750	1.4375	1.4219	1.0313	0.14	0.13	4.61	4.37	5.67	6.06	1.23	36100	-0.01
693	52400-52638	4.0000	6.3750	1.5625	1.4219	1.1563	0.14	0.13	4.61	4.37	5.63	6.06	1.23	36100	-0.01
694	687-672	4.0000	6.6250	1.6250	1.6250	1.1875	0.14	0.13	4.65	4.41	5.87	6.30	1.24	39800	-0.11
695	780-772	4.0000	7.1250	1.8750	1.8900	1.5000	0.14	0.13	4.69	4.45	6.34	6.61	1.51	51400	-0.32
696	861-854	4.0000	7.5000	2.2500	2.2650	1.7500	0.31	0.13	5.08	4.49	6.69	6.85	1.74	73200	-0.60

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER db SHAFT	RECOMMENDED SHOULDER DIAMETER da SHAFT	RECOMMENDED SHOULDER DIAMETER Db HOUSING	RECOMMENDED SHOULDER DIAMETER Da HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
697	HH221449-HH221410	4.0000	7.5000	2.2500	2.2650	1.8125	0.14	0.13	4.80	4.56	6.73	7.05	1.74	85200	-0.59
698	HH221449A-HH221410	4.0000	7.5000	2.2500	2.2650	1.8125	0.14	0.13	4.80	4.56	6.73	7.05	1.74	85200	-0.59
699 *	HH221449-HH221416	4.0000	7.8750	2.4375	2.2650	2.0000	0.31	0.13	5.16	4.56	6.87	7.05	1.74	85200	-0.59
700	941-932	4.0000	8.3750	2.6250	2.6250	2.1250	0.28	0.13	5.12	4.81	7.36	7.60	1.79	83300	-0.78
701	HH224335-HH224310	4.0000	8.3750	2.6250	2.6250	2.1250	0.28	0.13	5.20	4.76	7.56	7.94	1.79	108300	-0.74
702	782-772	4.1250	7.1250	1.8750	1.8900	1.5000	0.14	0.13	4.80	4.57	6.34	6.61	1.51	51400	-0.32
703	786-772	4.1250	7.1250	1.8750	1.8900	1.5000	0.25	0.13	5.04	4.57	6.34	6.61	1.51	51400	-0.32
704	787-772	4.1250	7.1250	1.8750	1.8900	1.5000	0.28	0.13	5.08	4.57	6.34	6.61	1.51	51400	-0.32
705	71412-71750	4.1250	7.5000	1.8750	1.9375	1.3750	0.14	0.13	4.88	4.65	6.73	7.13	1.40	58300	-0.26
706	56418-56650	4.1875	6.5000	1.4375	1.4375	1.0625	0.14	0.13	4.80	4.57	5.87	6.26	1.18	36600	0.08
707	L521949-L521910	4.2500	5.7500	0.8438	0.8438	0.6563	0.06	0.06	4.57	4.49	5.35	5.55	1.49	15700	0.19
708	L521949-L521914	4.2500	6.0000	0.8438	0.8438	0.6563	0.06	0.06	4.57	4.49	5.47	5.67	1.49	15700	0.19
709	LM522546-LM522510	4.2500	6.2987	1.3750	1.3750	1.0625	0.14	0.13	4.80	4.57	5.75	6.06	1.45	31600	-0.06
710	48190-48120	4.2500	6.3750	1.3750	1.3750	1.0625	0.14	0.13	4.80	4.57	5.75	6.14	1.16	31000	0.15
711	56425-56650	4.2500	6.5000	1.4375	1.4375	1.0625	0.14	0.13	4.84	4.61	5.87	6.26	1.18	36600	0.08
712	56425-56662	4.2500	6.6250	1.4375	1.4375	1.0625	0.14	0.13	4.84	4.61	5.94	6.34	1.18	36600	0.08
713 *	67425-67675	4.2500	6.7500	1.3386	1.1875	0.9948	0.14	0.13	4.84	4.57	6.14	6.46	1.24	32000	0.18
714	71425-71750	4.2500	7.5000	1.8750	1.9375	1.3750	0.14	0.13	4.96	4.72	6.73	7.13	1.40	58300	-0.26

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									db SHAFT	da SHAFT	Db HOUSING	Da HOUSING			
715	HH224340-HH224310	4.2500	8.3750	8.3750	2.6250	2.1250	0.31	0.13	5.47	4.96	7.56	7.94	1.79	108300	-0.74
716	71437-71750	4.3750	7.5000	1.8758	1.9375	1.3750	0.14	0.13	5.08	4.84	6.73	7.13	1.40	58300	0.26
717 *	L623149-L623110	4.5000	6.0000	0.8438	0.8438	0.6563	0.06	0.06	4.84	4.72	5.63	5.79	1.41	16300	0.25
718	64450-64700	4.5000	7.0000	1.6250	1.6250	1.1875	0.14	0.13	5.16	4.92	6.30	6.77	1.13	44300	0.05
719	64450-64708	4.5000	7.0856	1.6250	1.6250	1.1875	0.14	0.13	5.16	4.92	6.34	6.81	1.13	44300	0.05
720	68450-68712	4.5000	7.1250	1.3750	1.2500	1.0000	0.14	0.13	5.12	4.84	6.42	6.77	1.18	31800	0.21
721	71450-71750	4.5000	7.5000	1.8750	1.9375	1.3750	0.14	0.13	5.20	4.92	6.73	7.13	1.40	58300	-0.26
722	938-932	4.5000	8.3750	2.6250	2.6250	2.1250	0.28	0.13	5.55	5.04	7.36	7.80	1.79	83300	-0.78
723	HH224346-HH224310	4.5000	8.3750	2.6250	2.6250	2.1250	0.28	0.13	5.63	5.16	7.56	7.94	1.79	108300	-0.74
724	71453-71750	4.5310	7.5000	1.8750	1.9375	1.3750	0.14	0.13	5.24	4.96	6.73	7.13	1.40	58300	-0.26
725	68462-68709	4.6250	7.0856	1.3750	1.2500	1.0000	0.14	0.03	5.20	4.92	6.50	6.77	1.18	31800	0.21
726	68462-68712	4.6250	7.1250	1.3750	1.2500	1.0000	0.14	0.13	5.20	4.92	6.42	6.77	1.18	31800	0.21
727	68463-68712	4.6250	7.1250	1.3750	1.2500	1.0000	0.31	0.13	5.51	4.92	6.42	6.77	1.18	31800	0.21

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									SHAFT		HOUSING				
									db	da	Db	Da			
728	L624549-L624510	4.7500	6.3125	0.8438	0.8438	0.6563	0.06	0.06	5.08	5.00	5.91	6.10	1.34	17300	0.33
729	L225842-L225810	4.7500	6.6875	1.0000	1.0313	0.8125	0.06	0.06	5.16	5.08	6.30	6.46	1.76	23300	0.10
730	M224749-M224711	4.7500	6.7812	1.4063	1.4375	1.0938	0.14	0.06	5.31	5.08	6.38	6.57	1.76	39700	-0.14
731	M224749-M224710	4.7500	6.8750	1.4063	1.4375	1.0938	0.14	0.06	5.31	5.08	6.42	6.61	1.76	39700	-0.14
732	HM624749-HM624710	4.7500	7.5000	1.8125	1.8125	1.3750	0.14	0.06	5.43	5.20	6.85	7.24	1.37	58000	-0.15
733	795-792	4.7500	8.1250	1.8750	1.8750	1.3750	0.13	0.13	5.47	5.28	7.32	7.80	1.27	57000	-0.07
734	95475-95925	4.7500	9.2500	2.5000	2.5000	1.9375	0.25	0.13	5.87	5.39	8.23	8.54	1.58	89400	-0.55
735	HH228340-HH228310	4.7500	10.0000	3.0625	3.2500	2.4375	0.38	0.25	6.22	5.59	8.78	9.20	1.82	144400	-0.92
736	48286-48220	4.8750	7.1875	1.5625	1.5000	1.3125	0.14	0.03	5.47	5.24	6.61	6.93	1.91	43200	-0.22
737	LL225749-LL225710	5.0000	6.5313	0.7188	0.6875	0.5313	0.06	0.06	5.31	5.24	6.22	6.30	1.76	15000	0.24
738	L225849-L225810	5.0000	6.6875	1.0000	1.0313	0.8125	0.06	0.06	5.35	5.28	6.30	6.46	1.76	23300	0.10
739	L225849-L225818	5.0000	7.1250	1.0000	1.0313	0.8125	0.06	0.06	5.35	5.28	6.46	6.54	1.76	23300	0.10
740	48290-48220	5.0000	7.1875	1.5625	1.5000	1.3125	0.14	0.13	5.55	5.31	6.61	6.93	1.91	43200	-0.22
741	67388-67322	5.0000	7.7500	1.8125	1.8125	1.5000	0.14	0.13	5.67	5.43	7.09	7.44	1.70	56800	-0.25
742	74500-74850	5.0000	8.5000	1.8750	1.8750	1.3750	0.14	0.13	5.83	5.55	7.72	8.19	1.20	57800	0.09

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									SHAFT		HOUSING				
									db	da	Db	Da			
743	95500-95905	5.0000	9.0551	2.5000	2.5000	1.9375	0.25	0.13	6.06	5.59	8.15	8.54	1.58	89400	-0.55
744	95500-95925	5.0000	9.2500	2.5000	2.5000	1.9375	0.25	0.13	6.06	5.59	8.23	8.54	1.58	89400	-0.55
745	HH228349-HH228310	5.0000	10.0000	3.0625	3.2500	2.4375	0.38	0.25	6.46	5.83	8.78	9.20	1.82	144400	-0.92
746 •	HH231637-HH231610	5.0000	11.3750	3.2500	3.4375	2.2500	0.53	0.25	6.85	5.91	10.04	10.38	1.83	168000	-1.05
747	HH231637-HH231615	5.0000	11.6250	3.2500	3.4375	2.2500	0.53	0.25	6.85	5.91	10.16	10.38	1.83	168200	-1.05
748	799-792	5.0625	8.1250	1.8750	1.8750	1.3750	0.13	0.13	5.75	5.51	7.32	7.80	1.27	57000	-0.07
749	67389-67322	5.1250	7.7500	1.8125	1.8215	1.5000	0.14	0.13	5.75	5.55	7.09	7.44	1.70	56800	-0.25
750	799A-792	5.1250	8.1250	1.8750	1.8750	1.3750	0.14	0.13	5.83	5.59	7.32	7.80	1.27	57000	-0.07
751	LL327049-LL327010	5.2500	6.8125	0.7500	0.6875	0.5625	0.06	0.06	5.55	5.47	6.46	6.57	1.68	16100	0.30
752	L327249-L327210	5.2500	6.9688	1.0000	1.0313	0.8125	0.06	0.06	5.59	5.51	6.57	6.73	1.68	24000	0.16
753	L826949-L826914	5.2500	7.2500	1.0000	1.0000	0.7188	0.13	0.13	5.75	5.55	6.65	6.97	1.16	25700	0.48
754	48385-48320	5.2500	7.5000	1.5625	1.5625	1.3125	0.14	0.13	5.83	5.59	6.97	7.24	1.82	43800	-0.16
755	67390-67322	5.2500	7.7500	1.8125	1.8125	1.5000	0.14	0.13	5.87	5.63	7.09	7.44	1.70	56800	-0.25
756	67391-67322	5.2500	7.7500	1.8125	1.8125	1.5000	0.31	0.13	6.18	5.63	7.09	7.44	1.70	56800	-0.25
757	74525-74850	5.2500	8.5000	1.8750	1.8750	1.3750	0.14	0.13	5.98	5.75	7.72	8.19	1.20	57800	0.09
758	95525-95925	5.2500	9.2500	2.5000	2.5000	1.9375	0.38	0.13	6.54	5.83	8.23	8.54	1.58	89400	-0.55
759	95528-95925	5.2500	9.2500	2.5000	2.5000	1.9375	0.19	0.13	6.18	5.83	8.23	8.54	1.58	89400	-0.55
760	48393-48320	5.3750	7.5000	1.5625	1.5625	1.3125	0.14	0.13	5.94	5.67	6.97	7.24	1.82	43800	-0.16

• INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	db	da	Db	Da	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									RECOMMENDED SHOULDER DIAMETER						
									SHAFT		HOUSING				
761	LM229140C-LM229110	5.3750	7.6762	1.2992	1.2992	1.0827	0.14	0.14	5.98	5.75	7.17	7.48	1.76	41300	0.04
762	74537-74550	5.3750	8.5000	1.8750	1.8750	1.3750	0.14	0.13	6.18	5.83	7.72	8.19	1.20	57800	0.09
763	898-892	5.3750	9.0000	2.2500	2.2500	1.7500	0.14	0.13	6.14	5.91	8.07	8.50	1.39	83300	-0.24
764	LL428349-LL428310	5.5000	7.1250	0.8438	0.8125	0.6563	0.06	0.06	5.83	5.75	6.77	6.89	1.60	11100	0.31
765	LM328448-LM328410	5.5000	7.3750	1.1250	1.1563	0.9063	0.06	0.06	5.87	5.79	6.93	7.17	1.65	31200	0.14
766	74550-74845	5.5000	8.4636	1.8750	1.8750	1.3750	0.14	0.13	6.22	5.94	7.72	8.19	1.20	57800	0.09
767	74550-74850	5.5000	8.5000	1.8750	1.8750	1.3750	0.14	0.13	6.22	5.94	7.72	8.19	1.20	57800	0.09
768	74550A-74850	5.5000	8.5000	1.8750	1.8750	1.3750	0.25	0.13	6.42	5.94	7.72	8.19	1.20	57800	0.09
769	73551-73875	5.5000	8.7500	1.3750	1.2450	0.9375	0.14	0.13	6.14	5.91	8.03	8.15	1.34	40300	0.25
770	898-892	5.5000	9.0000	2.2500	2.2500	1.7500	0.14	0.13	6.30	6.02	8.07	8.50	1.39	83300	-0.24
771	898A-892	5.5000	9.0000	2.2500	2.2500	1.7500	0.25	0.13	6.50	6.02	8.07	8.50	1.39	83300	-0.24
772	82550-82950	5.0000	9.0000	2.2500	2.2300	1.7500	0.14	0.13	6.34	6.06	8.46	8.90	1.32	65200	-0.14
773	99550-99100	5.5000	10.0000	2.8250	2.8250	1.8750	0.28	0.13	6.69	6.14	8.94	9.37	1.43	91400	-0.48
774 •	HH231649-HH231610	5.5000	11.3750	3.2500	3.4375	2.2500	0.38	0.25	6.97	6.34	10.04	10.38	1.83	168200	-1.05
775	HH231649-HH231615	5.5000	11.6250	3.2500	3.4375	2.2500	0.38	0.25	6.97	6.34	10.16	10.38	1.83	168200	-1.05
776	HH234031-HH234010	5.5000	12.1250	3.5000	3.6875	2.6250	0.38	0.27	7.09	6.61	10.87	11.24	1.79	194800	-1.04
777 •	EE450551-EE451212	5.5000	12.1250	3.5000	3.6875	2.4375	0.38	0.27	7.09	6.61	10.59	10.38	1.79	147200	-1.07
778 •	HH234031-HH234018	5.5000	12.5000	3.5000	3.6875	2.6250	0.38	0.27	7.09	6.61	11.02	11.24	1.79	194800	-1.04

• INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
									db SHAFT	da SHAFT	Db HOUSING	Da HOUSING			
779	48685-48620	5.6250	7.8750	1.6250	1.5625	1.3437	0.14	0.13	6.22	5.94	7.28	7.60	1.74	43500	-0.12
780	73562-73875	5.6250	8.7500	1.3750	1.2450	0.9375	0.14	0.13	6.26	5.98	8.03	8.15	1.34	40300	0.25
781	LL529749-LL529710	5.7500	7.4063	0.8750	0.8125	0.6563	0.06	0.06	6.10	5.98	7.05	7.17	1.53	18700	0.37
782 *	36690-36620	5.7500	7.6250	1.1250	1.1250	0.9063	0.06	0.06	6.10	6.02	7.17	7.40	1.59	32000	0.19
783	36691-36620	5.7500	7.6250	1.1250	1.1250	0.9063	0.19	0.06	6.38	6.02	7.17	7.40	1.59	32000	0.19
784	82576-82931	5.7500	9.3125	2.2500	2.2300	1.7500	0.14	0.13	6.54	6.30	8.39	8.90	1.32	82500	-0.14
785	HM231140-HM231110	5.7500	9.3125	2.2500	2.2300	1.7500	0.14	0.13	6.46	6.30	8.54	8.82	1.83	86500	-0.45
786	82576-82950	5.7500	9.5000	2.2500	2.2300	1.7500	0.14	0.13	6.54	6.30	8.46	8.90	1.32	82500	-0.14
787	99575-99100	5.7500	10.0000	2.6250	2.6250	1.8750	0.28	0.13	6.89	6.38	8.94	9.37	1.43	91400	-0.48
788	EE107057-107105	5.7500	10.5625	2.9375	2.9375	2.2500	0.25	0.25	6.93	6.54	9.33	9.82	1.51	119700	-0.59
789	HM231148-HM231110	5.8750	9.3125	2.2500	2.2300	1.7500	0.25	0.13	6.77	6.42	8.54	8.82	1.83	86500	-0.45
790 *	HM231149-HM231110	5.8750	9.3125	2.2500	2.2300	1.7500	0.14	0.13	6.57	6.42	8.54	8.82	1.83	86500	-0.45
791	99587-99100	5.8750	10.0000	2.6250	2.6250	1.8750	0.28	0.13	7.01	6.50	8.94	9.37	1.43	91400	-0.48
792	L630349-L630310	6.0000	7.5625	0.9843	0.9449	0.7480	0.08	0.08	6.38	6.22	7.20	7.36	1.40	13900	0.40

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER db SHAFT	RECOMMENDED SHOULDER DIAMETER da SHAFT	RECOMMENDED SHOULDER DIAMETER Db HOUSING	RECOMMENDED SHOULDER DIAMETER Da HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
793	L730649-L730610	6.0000	8.0000	1.1250	1.1250	0.8440	0.13	0.13	6.50	6.30	7.48	7.80	1.27	31700	0.45
794	LM330448-LM330410	6.0000	8.0000	1.6250	1.6250	1.3750	0.13	0.13	6.54	6.37	7.44	7.76	1.68	45700	-0.07
795	M231648-M231610	6.0000	8.7500	1.8437	1.8437	1.3750	0.31	0.06	7.01	6.42	8.15	8.39	1.76	55000	-0.24
796	M231649-M231610	6.0000	8.7500	1.8437	1.8437	1.3750	0.14	0.06	6.65	6.42	8.15	8.39	1.76	55000	-0.24
797	99600-99100	6.0000	10.0000	2.6250	2.6250	1.8750	0.28	0.13	7.13	6.68	8.94	9.37	1.43	91400	-0.48
798	EE107060-107105	6.0000	10.5625	2.9375	2.9375	2.2500	0.25	0.25	7.13	6.73	9.33	9.82	1.51	119700	-0.59
799 *	HH234048-HH234010	6.0000	12.1250	3.5000	3.6875	2.6250	0.38	0.27	7.52	7.05	10.87	11.24	1.79	194800	-1.04
800	EE450601-451212	6.0000	12.1250	3.5000	3.6875	2.4375	0.38	0.27	7.44	6.97	10.59	10.82	1.79	168200	-1.11
801 *	HH23404S-HH234018	6.0000	12.5000	3.5000	3.6875	2.6250	0.38	0.27	7.52	7.05	11.02	11.24	1.79	194800	-1.04

* INACTIVE FOR NEW DESIGN AFTER 20 AUG 1976.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Cones, cups, and rollers: bearing qualify - carburizing grade alloy or through-hardening grade alloy steel in accordance with ASTM-A295, ASTM-A534, or ASTM-A535. Cage: carbon steel (one piece stamped).

2. Hardness: Cones, cups and rollers: 58 to 64HRC.

3. Tolerances: Standard grade (AFBMA Class 4) (allowable tolerances are in 0.0001 inch).

Cone bore (d)			
Size range		Tolerance	
Over	Incl.	Plus	Minus
0 3.0000	3.0000 6.0000	5 10	0 0

Cup diameter (D)			
Size range		Tolerance	
Over	Incl.	Plus	Minus
0.0000 12.0000	12.0000 24.0000	10 20	0 0

Bearing width (T)			
Bore size range		Tolerance	
Over	Incl.	Plus	Minus
0 4.0000	4.0000 6.0000	80 140	0 100

Assembled bearing maximum radial runout		
Cup O.D. (D)		Tolerance
Over	Incl.	
0	24.0	20

4. Effective load center: Dimension (a) locates a point on the cone axis which is the center of Pressure of all resisting forces set up by the rollers. All moments should be calculated from this point when determining bearing loading and shaft stresses. A Plus value of (a) indicates that the center is outside the cone backface.

5. Operating temperature: Recommended operating temperature not to exceed 230° F.


6. Lubrication: Bearings shall be furnished without lubrication. All bearings shall be preserved in accordance with MIL-P-197.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

7. Normal angle: A normal angle bearing has a contact angle (α) between 10 and 19 degrees. The contact angle is the angle between the line of action of the resisting forces set up by the rollers and a plane perpendicular to the bearing axis.

8. Part number: The part number consist of the letters FFB, the basic federal specification number, the specification street number and a dash number from table 1.

EXAMPLE: FFB187/01 - 417



Ÿ. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

10. Referenced documents shall be of the issue in effect on the date of invitation for bids, or request for proposal.

NOTE: Inch units can be converted to soft metric units as follows:

Inch	X	25.4	=	millimeters

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

INTERCHANGEABILITY TABLE

MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS	MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS
MS19081-1	FFB187/01-002	MS19081-26	FFB187/01-082
MS19081-2	FFB187/01-004	MS19081-27	FFB187/01-085
MS19081-3	FFB187/01-006	MS19081-28	FFB187/01-093
MS19081-4	FFB187/01-008	MS19081-29	FFB187/01-096
MS19081-5	FFB187/01-009	MS19081-30	FFB187/01-101
MS19081-6	FFB187/01-010	MS19081-31	FFB187/01-102
MS19081-7	FFB187/01-012	MS19081-32	FFB187/01-115
MS19081-8	FFB187/01-014	MS19081-33	FFB187/01-116
MS19081-9	FFB187/01-015	MS19081-34	FFB187/01-123
MS19081-10	FFB187/01-016	MS19081-35	FFB187/01-127
MS19081-11	FFB187/01-017	MS19081-36	FFB187/01-131
MS19081-12	FFB187/01-023	MS19081-37	FFB187/01-133
MS19081-13	FFB187/01-024	MS19081-38	FFB187/01-137
MS19081-14	FFB187/01-025	MS19081-39	FFB187/01-142
MS19081-15	FFB187/01-029	MS19081-40	FFB187/01-144
MS19081-16	FFB187/01-031	MS19081-41	FFB187/01-153
MS19081-17	FFB187/01-037	MS19081-42	FFB187/01-154
MS19081-18	FFB187/01-039	MS19081-43	FFB187/01-158
MS19081-19	FFB187/01-044	MS19081-44	FFB187/01-162
MS19081-20	FFB187/01-051	MS19081-45	FFB187/01-175
MS19081-21	FFB187/01-057	MS19081-46	FFB187/01-183
MS19081-22	FFB187/01-060	MS19081-47	FFB187/01-184
MS19081-23	FFB187/01-066	MS19081-48	FFB187/01-191
MS19081-24	FFB187/01-071	MS19081-49	FFB187/01-194
MS19081-25	FFB187/01-075	MS19081-50	FFB187/01-195

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the current version before use.

INTERCHANGEABILITY TABLE - continued

MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS	MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS
MS19081-51	FFB187/01-196	MS19081-76	FFB187/01-297
MS19081-52	FFB187/01-198	MS19081-77	FFB187/01-298
MS19081-53	FFB187/01-202	MS19081-78	FFB187/01-304
MS19081-54	FFB187/01-206	MS19081-79	FFB187/01-313
MS19081-55	FFB187/01-210	MS19081-80	FFB187/01-320
MS19081-56	FFB187/01-213	MS19081-81	FFB187/01-326
MS19081-57	FFB187/01-218	MS19081-82	FFB187/01-328
MS19081-58	FFB187/01-222	MS19081-83	FFB187/01-329
MS19081-59	FFB187/01-223	MS19081-84	FFB187/01-332
MS19081-60	FFB187/01-233	MS19081-85	FFB187/01-338
MS19081-61	FFB187/01-235	MS19081-86	FFB187/01-345
MS19081-62	FFB187/01-241	MS19081-87	FFB187/01-357
MS19081-63	FFB187/01-250	MS19081-88	FFB187/01-365
MS19081-64	FFB187/01-253	MS19081-89	FFB187/01-372
MS19081-65	FFB187/01-254	MS19081-90	FFB187/01-376
MS19081-66	FFB187/01-262	MS19081-91	FFB187/01-388
MS19081-67	FFB187/01-263	MS19081-92	FFB187/01-393
MS19081-68	FFB187/01-266	MS19081-93	FFB187/01-404
MS19081-69	FFB187/01-267	MS19081-94	FFB187/01-412
MS19081-70	FFB187/01-274	MS19081-95	FFB187/01-417
MS19081-71	FFB187/01-280	MS19081-96	FFB187/01-422
MS19081-72	FFB187/01-288	MS19081-97	FFB187/01-421
MS19081-73	FFB187/01-293	MS19081-98	FFB187/01-428
MS19081-74	FFB187/01-294	MS19081-99	FFB187/01-430
MS19081-75	FFB187/01-295	MS19081-100	FFB187/01-431

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the current version before use.

INTERCHANGEABILITY TABLE - Continued

MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS	MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS
MS19081-101	FFB187/01-436	MS19081-126	FFB187/01-578
MS19081-102	FFB187/01-444	MS19081-127	FFB187/01-586
MS19081-103	FFB187/01-458	MS19081-128	FFB187/01-592
MS19081-104	FFB187/01-461	MS19081-129	FFB187/01-608
MS19081-105	FFB187/01-464	MS19081-130	FFB187/01-612
MS19081-106	FFB187/01-470	MS19081-131	FFB187/01-614
MS19081-107	FFB187/01-472	MS19081-132	FFB187/01-616
MS19081-108	FFB187/01-476	MS19081-133	FFB187/01-622
MS19081-109	FFB187/01-479	MS19081-134	FFB187/01-626
MS19081-110	FFB187/01-480	MS19081-135	FFB187/01-628
MS19081-111	FFB187/01-481	MS19081-136	FFB187/01-630
MS19081-112	FFB187/01-490	MS19081-137	FFB187/01-642
MS19081-113	FFB187/01-500	MS19081-138	FFB187/01-644
MS19081-114	FFB187/01-511	MS19081-139	FFB187/01-646
MS19081-115	FFB187/01-529	MS19081-140	FFB187/01-650
MS19081-116	FFB187/01-532	MS19081-141	FFB187/01-653
MS19081-117	FFB187/01-535	MS19081-142	FFB187/01-669
MS19081-118	FFB187/01-537	MS19081-143	FFB187/01-675
MS19081-119	FFB187/01-547	MS19081-144	FFB187/01-676
MS19081-120	FFB187/01-549	MS19081-145	FFB187/01-678
MS19081-121	FFB187/01-550	MS19081-146	FFB187/01-691
MS19081-122	FFB187/01-551	MS19081-147	FFB187/01-694
MS19081-123	FFB187/01-554	MS19081-148	FFB187/01-695
MS19081-124	FFB187/01-575	MS19081-149	FFB187/01-696
MS19081-125	FFB187/01-577	MS19081-150	FFB187/01-699

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the currentversion before use.

INTERCHANGEABILITY TABLE - Continued

MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS	MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS
MS19081-151	FFB187/01-701	MS19081-176	FFB187/01-797
MS19081-152	FFB187/01-710	MS19081-177	FFB187/01-799
MS19081-153	FFB187/01-711	MS19081-178	FFB187/01-801
MS19081-154	FFB187/01-713	MS19081-179	FFB187/01-410
MS19081-155	FFB187/01-716	MS19081-180	FFB187/01-534
MS19081-156	FFB187/01-717	MS19081-181	FFB187/01-633
MS19081-157	FFB187/01-720	MS19081-182	FFB187/01-643
MS19081-158	FFB187/01-721	MS19081-183	FFB187/01-019
MS19081-159	FFB187/01-723	MS19081-184	FFB187/01-042
MS19081-160	FFB187/01-740	MS19081-185	FFB187/01-090
MS19081-161	FFB187/01-741	MS19081-186	FFB187/01-100
MS19081-162	FFB187/01-744	MS19081-187	FFB187/01-103
MS19081-163	FFB187/01-745	MS19081-188	FFB187/01-129
MS19081-164	FFB187/01-746	MS19081-189	FFB187/01-160
MS19081-165	FFB187/01-750	MS19081-190	FFB187/01-168
MS19081-166	FFB187/01-758	MS19081-191	FFB187/01-182
MS19081-167	FFB187/01-760	MS19081-192	FFB187/01-212
MS19081-168	FFB187/01-767	MS19081-193	FFB187/01-238
MS19081-169	FFB187/01-773	MS19081-194	FFB187/01-270
MS19081-170	FFB187/01-774	MS19081-195	FFB187/01-285
MS19081-171	FFB187/01-777	MS19081-196	FFB187/01-286
MS19081-172	FFB187/01-778	MS19081-197	FFB187/01-299
MS19081-173	FFB187/01-782	MS19081-198	FFB187/01-314
MS19081-174	FFB187/01-790	MS19081-199	FFB187/01-316
MS19081-175	FFB187/01-796	MS19081-200	FFB187/01-321

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:46Z
Check the source to verify that this is the current version before use.

INTERCHANGEABILITY TABLE - Continued

MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS	MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS
MS19081-201	FFB187/01-324	MS19081-226	FFB187/01-482
MS19081-202	FFB187/01-325	MS19081-227	FFB187/01-483
MS19081-203	FFB187/01-327	MS19081-228	FFB187/01-489
MS19081-204	FFB187/01-346	MS19081-229	FFB187/01-492
MS19081-205	FFB187/01-354	MS19081-230	FFB187/01-493
MS19081-206	FFB187/01-355	MS19081-231	FFB187/01-495
MS19081-207	FFB187/01-356	MS19081-232	FFB187/01-497
MS19081-208	FFB187/01-360	MS19081-233	FFB187/01-498
MS19081-209	FFB187/01-366	MS19081-234	FFB187/01-499
MS19081-210	FFB187/01-374	MS19081-235	FFB187/01-509
MS19081-211	FFB187/01-383	MS19081-236	FFB187/01-510
MS19081-212	FFB187/01-386	MS19081-237	FFB187/01-512
MS19081-213	FFB187/01-395	MS19081-238	FFB187/01-513
MS19081-214	FFB187/01-398	MS19081-239	FFB187/01-515
MS19081-215	FFB187/01-399	MS19081-240	FFB187/01-517
MS19081-216	FFB187/01-402	MS19081-241	FFB187/01-406
MS19081-217	FFB187/01-403	MS19081-242	FFB187/01-424
MS19081-218	FFB187/01-414	MS19081-243	FFB187/01-427
MS19081-219	FFB187/01-432	MS19081-244	FFB187/01-605
MS19081-220	FFB187/01-433	MS19081-245	FFB187/01-606
MS19081-221	FFB187/01-438	MS19081-246	FFB187/01-607
MS19081-222	FFB187/01-446	MS19081-247	FFB187/01-621
MS19081-223	FFB187/01-451	MS19081-248	FFB187/01-623
MS19081-224	FFB187/01-455	(NO DASH 249)	-
MS19081-225	FFB187/01-473	MS19081-250	FFB187/01-520

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the current version before use.

INTERCHANGEABILITY TABLE – Continued

MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS	MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS
MS19081-251	FFB187/01-525	MS19081-276	FFB187/01-635
MS19081-252	FFB187/01-526	MS19081-277	FFB187/01-636
MS19081-253	FFB187/01-533	MS19081-278	FFB187/01-638
MS19081-254	FFB187/01-536	MS19081-279	FFB187/01-641
MS19081-255	FFB187/01-538	MS19081-280	FFB187/01-647
MS19081-256	FFB187/01-540	MS19081-281	FFB187/01-648
MS19081-257	FFB187/01-541	MS19081-282	FFB187/01-649
MS19081-258	FFB187/01-542	MS19081-283	FFB187/01-652
MS19081-259	FFB187/01-548	MS19081-284	FFB187/01-654
MS19081-260	FFB187/01-553	MS19081-285	FFB187/01-662
MS19081-261	FFB187/01-557	MS19081-286	FFB187/01-664
MS19081-262	FFB187/01-558	MS19081-287	FFB187/01-655
MS19081-263	FFB187/01-560	MS19081-288	FFB187/01-674
MS19081-264	FFB187/01-565	MS19081-289	FFB187/01-681
MS19081-265	FFB187/01-572	MS19081-290	FFB187/01-682
MS19081-266	FFB187/01-582	MS19081-291	FFB187/01-684
MS19081-267	FFB187/01-583	MS19081-292	FFB187/01-686
MS19081-268	FFB187/01-587	MS19081-293	FFB187/01-687
MS19081-269	FFB187/01-588	MS19081-294	FFB187/01-697
MS19081-270	FFB187/01-593	MS19081-293	FFB187/01-700
MS19081-271	FFB187/01-598	MS19081-296	FFB187/01-702
MS19081-272	FFB187/01-604	MS19081-297	FFB187/01-703
MS19081-273	FFB187/01-624	MS19081-298	FFB187/01-705
MS19081-274	FFB187/01-627	MS19081-299	FFB187/01-707
MS19081-275	FFB187/01-634	MS19081-300	FFB187/01-714

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

INTERCHANGEABILITY TABLE – Continued

MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS
MS19081-301	FFB187/01-715
MS19081-302	FFB187/01-718
MS19081-303	FFB187/01-722
MS19081-304	FFB187/01-724
MS19081-305	FFB187/01-729
MS19081-306	FFB187/01-733
MS19081-307	FFB187/01-734
MS19081-308	FFB187/01-742
MS19081-309	FFB187/01-748
MS19081-310	FFB187/01-754
MS19081-311	FFB187/01-762
MS19081-312	FFB187/01-770
MS19081-313	FFB187/01-772
MS19081-314	FFB187/01-743
MS19081-315	FFB187/01-786
MS19081-316	FFB187/01-787
MS19081-317	FFB187/01-788
MS19081-318	FFB187/01-791

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the current version before use.