KK–C–121c
23 JANUARY 1952
SUPERSEDING
Fed. Spec. KK–C–121b
14 January 1948

FEDERAL SPECIFICATION

CASES, BRIEF, LEATHER

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope.—This specification is intended primarily to cover the requirements for various designs of leather brief cases to be used for carrying papers, folders, etc.

1.2 Classification.

1.2.1 *Types.*—Brief cases covered by this specification shall be furnished in the following types, as specified (see 6.1):

Type I.—Lawyer's case (see fig. 4).
Type II.—Special lawyer's case (see fig. 5).
Type V.—Investigator's case (see fig. 6).
Type VI.—Inspector's case (see fig. 7).
Type VII.—Officer's case (see fig. 8).
Type VIII.—Catalog case (see fig. 9).
Type IX.—Brief bag (see fig. 10).

1.2.2 *Grade.*—The above types of cases shall be furnished in one grade as specified hereinafter.

1.2.3 *Color.*—The brief cases shall be of the following colors, as specified (see 6.1):

Black.
Brown.
Reddish-brown.
Russet.

2. APPLICABLE SPECIFICATIONS

2.1 The following Federal Specifications of the issues in effect on date of invitation for bids, form a part of this specification:

V–T–291—Thread; Linen.
KK–L–154—Leather; Bag and Case.
KK–L–311—Leather and Leather Products; General Specifications (Methods of Sampling, Inspection, and Tests).
QQ–B–611—Brass, Commercial; Bars, Plates, Rods, Shapes, Sheets, and Strips.
CCC–T–191—Textile Test Methods.
DDD–S–751—Stitches; Seams; and Stitching.

(Copies of Federal specifications and the Federal Specifications Index may be obtained upon application, accompanied by money order, coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington 25, D. C., or to the GSA Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco and Seattle. Prices may be obtained from the Superintendent of Documents or from the GSA Regional Offices.)

2.2 Specifications and other publications applicable only to individual departments are listed in section 7.

3. REQUIREMENTS

3.1 Material.

3.1.1 *Leather.*—Leather used in the manufacture of the cases, except as otherwise specified for the partitions and gussets, shall conform to the requirements of Federal Specification KK–L–154, type II, grade A; no leather which is laminated or soft and pipey shall be used.

3.1.1.1 *Finishes.*—The leather of the cases shall be of the following finishes, as specified hereinafter for the respective types:

Smooth (see fig. 1).
Boarded (not embossed) (see fig. 2).
Embossed in fine grain.
Embossed in coarse grain (see fig. 3).

952115°—52—No. 221——1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.


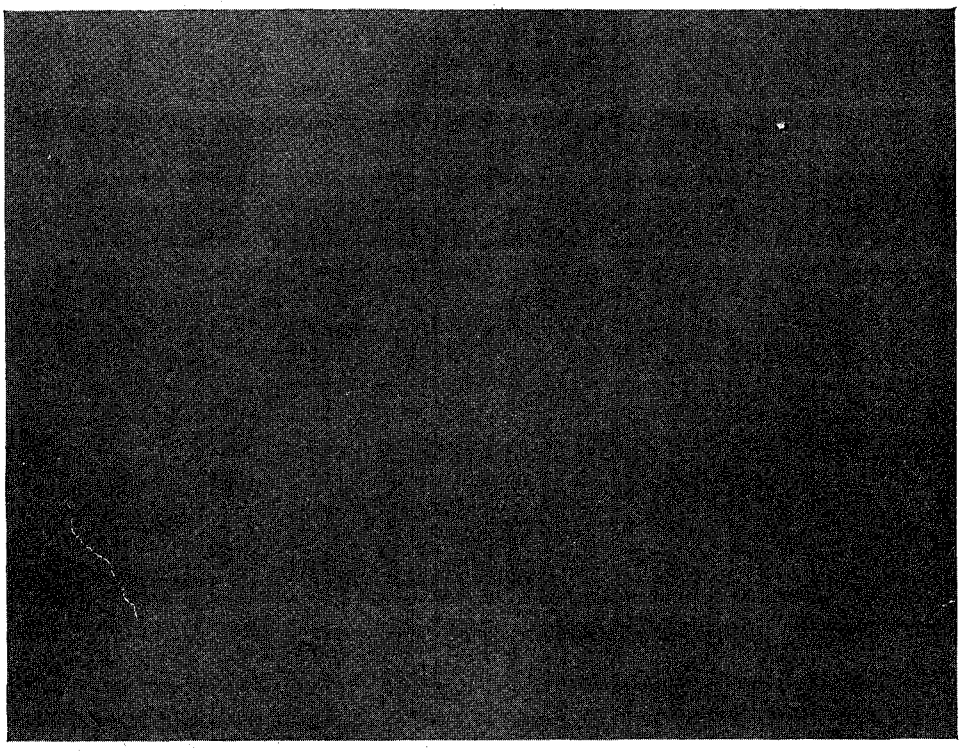


FIGURE 1.—Smooth finish.

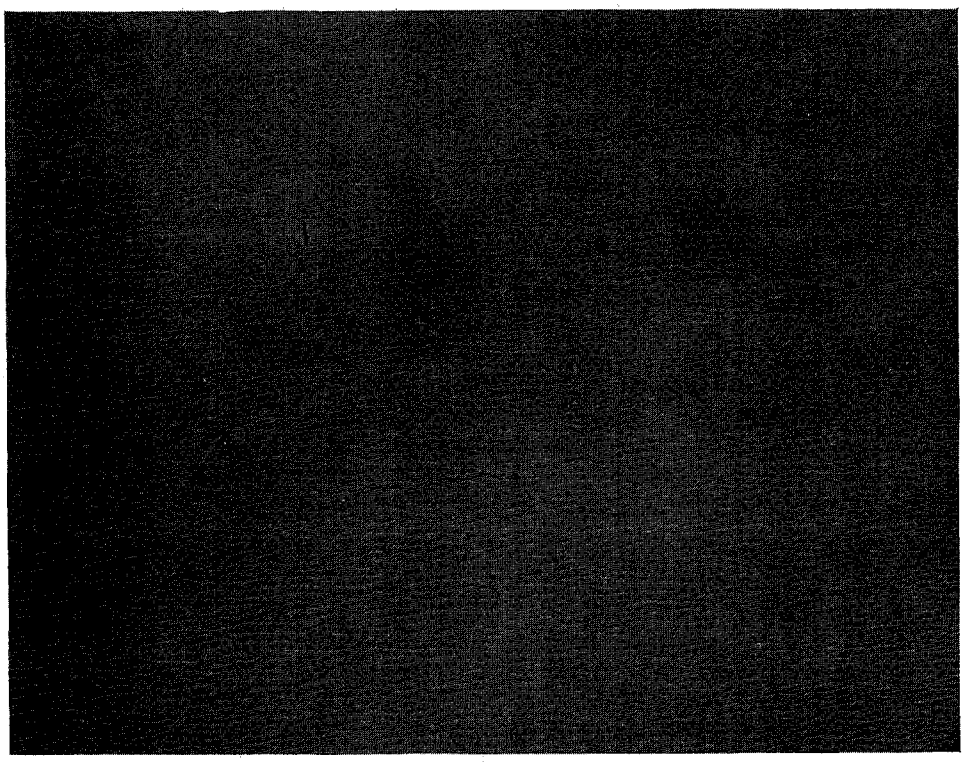

IGURE 2.—Boarded (not embossed) finish.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

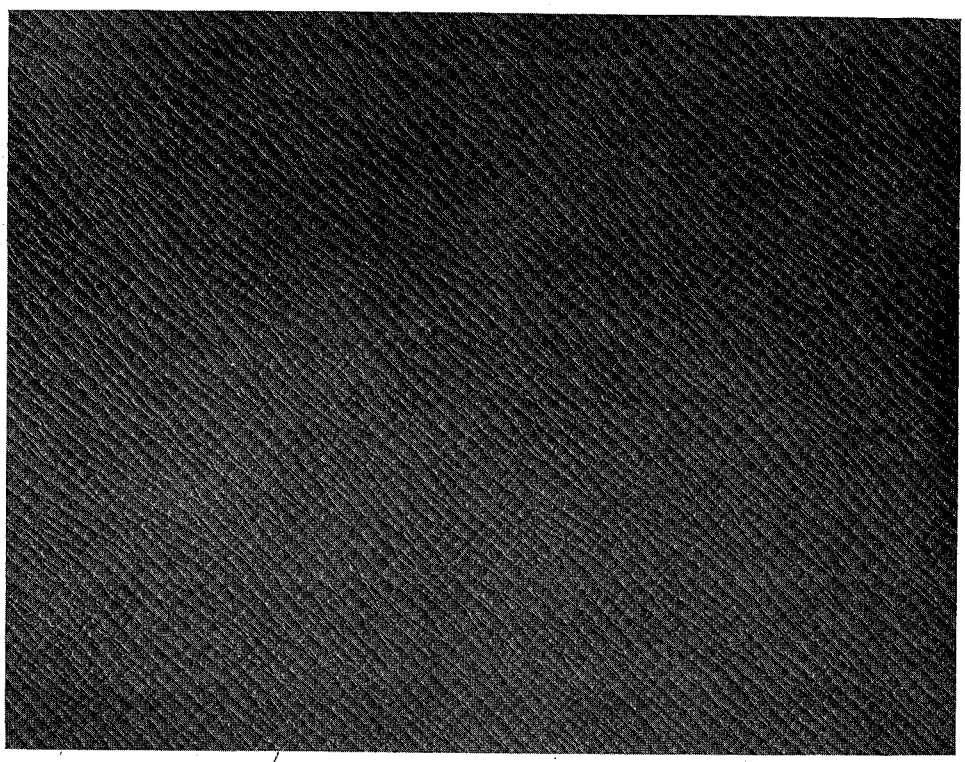


FIGURE 3.—Embossed in coarse grain.

3.1.1.2 *Mildew resistance.*—When specified in the invitation for bids, all leather used in the manufacture of cases and bags shall be treated so as to show no mold growth when tested in accordance with method 410.1 of Federal Specification KK–L–311.

3.1.2 *Thread.*—Thread used in stitching the brief cases shall be linen conforming to the requirements of Federal Specification V–T–291 for type B, lock-stitch twist, 4-ply thread, left twist. The thread shall match the color of the brief cases.

3.1.2.1 *Mildew resistance.*—When specified in the invitation for bids all thread used in stitching the cases and bags shall be treated with a fungicide. Tests shall be made in accordance with the requirements of method 4750 of Federal Specification CCC–T–191. If the residual tensile strength is less than 75 percent of the average of at least 10 specimens not leached or subjected to mildew as described in method 4750, the treatment shall be disapproved.

3.1.3 *Metal.*

3.1.3.1 *Locks and hasps.*—Locks and hasps shall be half-hard brass conforming to composition B of Federal Specification QQ–B–611.

3.1.3.2 *Buckles, dee rings, rivets and studs.*—Buckles, dee rings, rivets and studs shall be brass or metal treated so as to be noncorrosive.

3.1.4 *Reinforcing strips and wire.*—Reinforcing strips and wire shall be of steel.

3.2 Colorfastness (resistance to crocking).—The resistance of the leather to crocking shall be "good" as defined in Federal Specification KK–L–311.

3.3 Stitching.—Stitch type 301 as described in Federal Specification DDD–S–751, shall be used. All stitching shall be by a single row with from six to eight stitches per inch. At the end of each row of stitching there shall be at least three back stitches except where reinforced with a rivet or suitably cross-stitched.

3.4 Edges.—The cut edges of the leather shall be stained to match the case, and the finish shall be in accordance with good commercial practice and shall be such that the color will not rub off.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.5 Tolerances.

3.5.1 *Dimensions of cases.*—A tolerance of plus or minus ⅛ inch shall be allowed in the dimensions of the cases.


3.5.2 *Thickness of partition and gusset leather.*—A tolerance of plus or minus 1/12s (½ oz.) inch shall be allowed in the thickness of the leather for partitions and gussets.

3.6 Gussets.—Each pocket shall have a continuous gusset made from one piece of leather. Gussets shall be turned in at the top from 1 to 1½ inches and secured to the case and partitions at the top edges with capped bifurcated rivets of a color to match the color of the leather. Gussets shall be attached by cementing and stitching to the partitions, front and back of case.

3.7 Keys for locks.—All locks shall be equipped with two keys.

3.8 Buckles.—The buckles shall be of the single-prong, roller type. The base shall be securely attached to the strap by stitching, or stitching and riveting.


3.9 Type I, lawyer's case.—The general design of type I cases shall be as shown in figure 4.

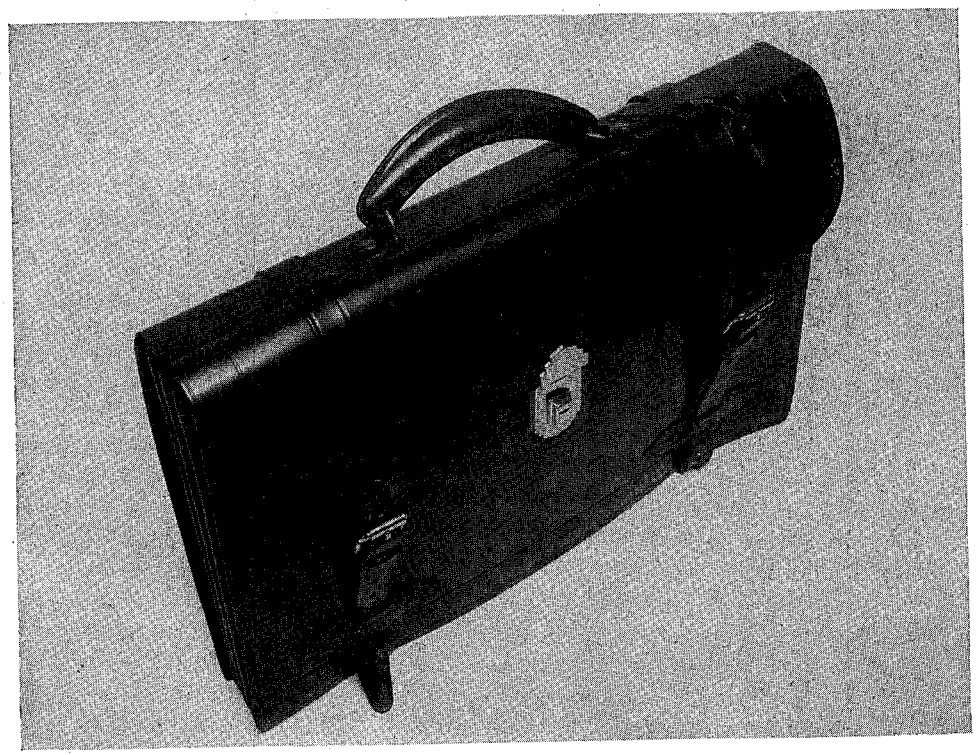

Lawyer's case (A).

FIGURE 4.—*Type I, lawyer's case.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

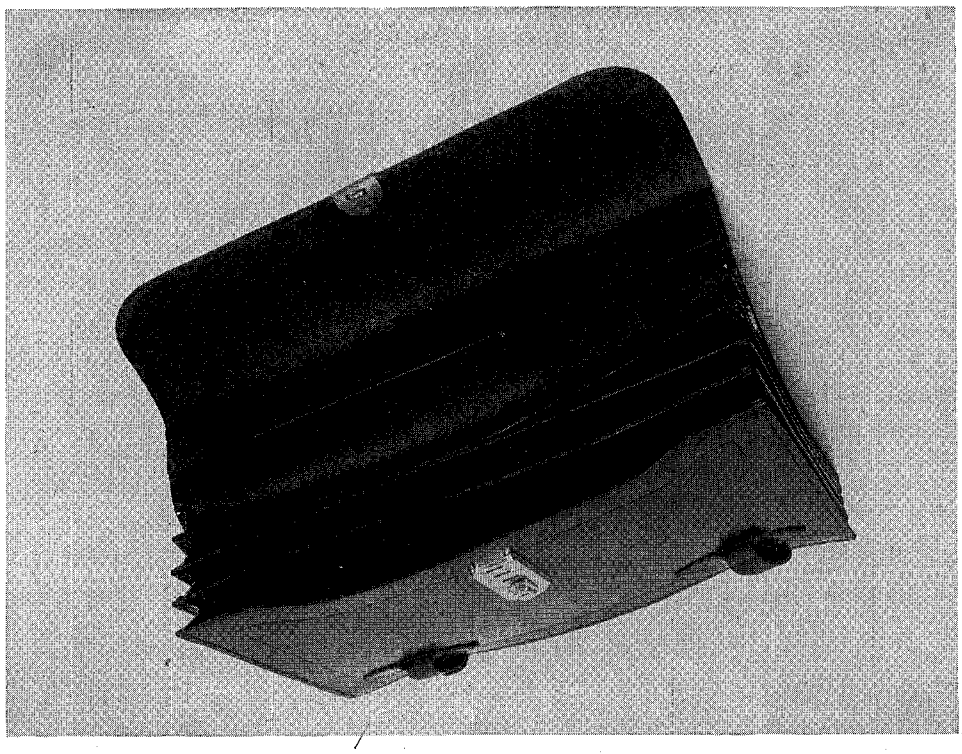

Lawyer's case (B).
FIGURE 4 (Continued).

3.9.1 *Leather.*

3.9.1.1 *Front, back, flap, straps, loops, and handle reinforcement.*—The front, back, flap, straps, loops, and handle reinforcement shall be made from smooth case leather $^{6}/_{64}$ inch (6 oz.) thick.

3.9.1.2 *Gussets.*—The gussets shall be made from boarded case leather $^{3}/_{64}$ inch thick. The top end of each seam holding the gusset to partitions and to the front and back of case shall be reinforced with a capped bifurcated rivet.

3.9.1.3 *Partitions.*—The partitions shall be made from firm, split, vegetable-tanned cowhide leather $^{4}/_{64}$ inch thick, finished smooth on both sides and colored to match the case leather. The case shall have full-length partitions forming pockets approximately 11 inches deep attached to the ends and bottom of the case.

3.9.2 *Size.*

3.9.2.1 *Case.*—The case shall be 17 inches long by 11 inches high, outside dimensions.

3.9.2.2 *Front.*—The front of the case shall be one piece of leather 17 inches by 11 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.9.2.3 *Back and flap.*—The back and flap shall be one piece of leather with an over-all length of 18 inches.

3.9.3 *Pockets.*—The case shall have two, three, or four pockets, as specified in the invitation for bids. Each pocket shall have an expansion of 1½ inches. The expansion shall be measured on the inside of the pocket between the edges of the gusset. A plus or minus tolerance of ⅛ inch will be permitted.

3.9.4 *Locks.*—The case shall be equipped with a brass three-position extension lock. The lock shall be secured to the front of the case with six metal prongs. The prongs shall be not less than 0.030 inch thick, 0.20 inch wide, and ⅜ inch long. They shall pass through corresponding holes in a metal backing plate and be securely clinched. The backing plate shall be approximately 3¼ inches long by 1⅞ inches wide and 0.020 inch thick. The backing plate shall be covered, after assembly, by cementing a piece of buffing leather approximately 3 inches by 4 inches over the plate. The hasp member of the lock shall be riveted to the flap with small tubular rivets.

3.9.5 *Buckles.*—The buckles shall be ⅞ inch wide, inside dimension.

3.9.6 *Handle.*—The handle shall be of the round "Vickle" type (paper wound) covered with smooth case leather and lock-stitched across the top. The thickness of the leather shall be not less than 3½ sixty-fourths inch. The handle shall be reinforced with a flat steel strip not less than 0.035 inch thick and 0.20 inch wide. The ends of the steel strip shall loop around two dee rings attached to the ends of the handle. The spread of the handle between the dees shall be 5½ inches ±¼ inch.

3.9.7 *Construction.*

3.9.7.1 *Front.*—A cut shall be made horizontally along the front of the case, 1 inch below the top edge and 4½ inches on both sides of the center. The ends of cut shall extend diagonally to the top edge at a distance of 2 inches from the ends of case (see fig. 4). The front, back, and flap of the case shall have a marginal crease approximately 1¼ inches from the edges.

3.9.7.2 *Flap.*—The corners of the flap shall be cut on a radius of approximately 2 inches.


3.9.7.3 *Straps.*—The case shall be equipped with two ⅞-inch straps extending entirely around the case. Straps shall be creased ⅛ inch from each edge. One end shall have a turnback loop 1⅝ inches long for holding the buckle. A leather keeper ½ inch wide shall be sewed in the turnback loop near the end of the buckle. The end of the strap extending over the flap shall be punched with 5 holes, 1 inch apart, beginning 2½ inches from the end. The length of the strap, exclusive of the buckle, shall be not less than 34 inches for a two-pocket case, 36 inches for a three-pocket, and 38 inches for a four-pocket.

3.9.7.4 *Loops.*—Each strap shall be held in place by four leather loops. The centers of the loops shall be approximately 4 inches from the side edges of the case. Two loops shall be on the back of the case, one on the front, and the other on the top. The top loop shall be a part of the loop used for attaching the handle. The loops shall be of the general design shown in figure 4. Each loop shall be attached to the case by one continuous row of stitching starting and finishing under the strap loops. The leather handle loops shall contain a steel strip through which the dee rings are passed. This construction shall be designed so as to allow all carrying parts to be metal against metal. The top pieces of the handle loops shall extend along the top of the case to also form a strap loop. Handle loops shall be secured to the case by stitching and riveting.


3.9.7.5 *Handle and flap reinforcement.*—A spring steel reinforcing strip, ½ inch wide and 1/32 inch thick with smoothed ends, shall be placed on the inside of the flap immediately under the handle and shall extend across the flap to within ⅜ inch of either end. This strip shall be perforated in two places to permit attachment with heavy shallow-drilled tubular or solid rivets which pass through the handle loops. The strip shall be covered with case leather approximately 1½ inches in width, extending completely across the top.

3.10 Type II, special lawyer's case.—Type II cases shall be the same as type I except as noted hereafter. The general design of type II cases shall be as shown in figure 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

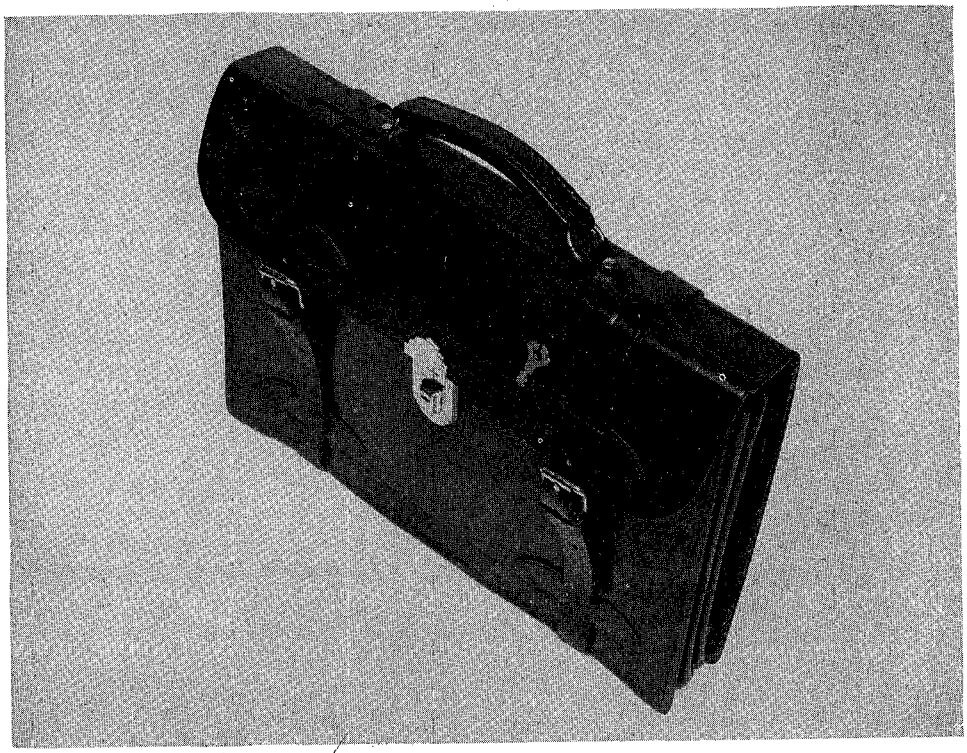

Special lawyer's case (A).

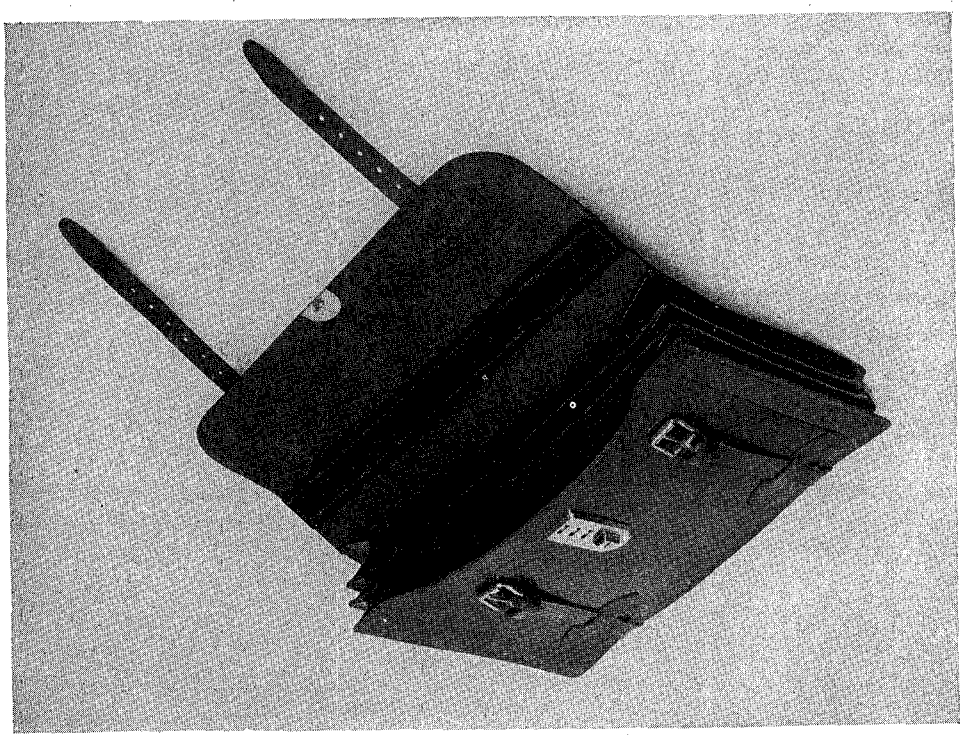

Special lawyer's case (B).

FIGURE 5.—Type II, special lawyer's case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.10.1 *Size.*—The case shall be 17 inches long by 11 inches high.

3.10.2 *Pockets.*—The case shall have three pockets. Each of the first two pockets shall have an expansion of 1¾ inches, and the third or rear pocket shall have an expansion of 3¾ inches. The tolerance on the former shall be plus or minus ⅛ inch, and on the latter, plus or minus ¼ inch.

3.10.3 *Handle.*—The handle shall be of the flat solid-leather type made from case leather and lock-stitched along each edge. It shall be ½ inch thick and covered with leather not less than 3/64 inch thick. The handle shall be reinforced with a flat steel strip not less than 0.025 inch thick and 0.20 inch wide. The ends of the steel strip shall loop around two dee rings attached to the ends of the handle. The spread of the handle between the dees shall be 5½ inches ±¼ inch.

3.10.4 *Straps.*—The case shall be equipped with two ⅞-inch-wide one-piece straps extending entirely around the case, as described in paragraph 3.9.7.3. The length of each strap, exclusive of the buckle, shall be not less than 38 inches.


3.11 Type V, investigator's case.—The general design of type V cases shall be as shown in figure 6.



Investigator's case (A).

FIGURE 6.—Type V, investigator's case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

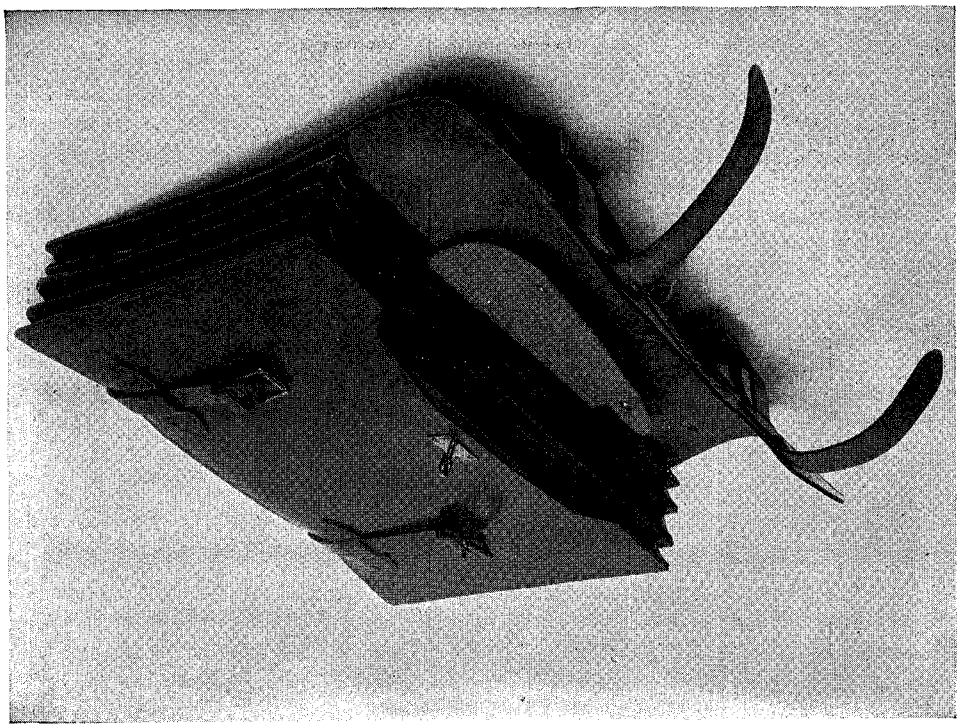

Investigator's case (B).

FIGURE 6 (Continued).

3.11.1 *Leather.*

3.11.1.1 *Front, back, flap, straps, and loops.*—The front, back, flap, straps, and loops shall be made from smooth case leather 7/64 inch thick.

3.11.1.2 *Gussets.*—The gussets shall be made of one piece of boarded case leather 3½ sixty-fourths inch thick (3½ oz.). The top end of each seam holding the gusset to the partitions and the front and back of the case, shall be reinforced with a capped bifurcated rivet.

3.11.1.3 *Partitions.*—The partitions shall be made from firm, split cowhide leather 6/64 inch thick, finished smooth on both sides and colored to match the case leather. The case shall have full-length partitions forming pockets approximately 11 inches deep attached to the ends and bottom of the case.

3.11.2 *Size.*

3.11.2.1 *Case.*—The case shall be 18 inches long by 12 inches high.

3.11.2.2 *Front.*—The front of the case shall be one piece of leather 18 inches by 12 inches.

3.11.2.3 *Back and flap.*—The back and flap shall be one piece of leather with an over-all length of 20½ inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.11.3 *Pockets.*—The case shall have two, three, or four pockets, as specified in the invitation for bids. A pencil pocket with flap, approximately 9 by 3½ inches, shall be attached to the last partition by stitching. The pencil pocket shall be made of gusset leather and shall be gusseted so as to have approximately a 1½-inch expansion at top. The flap shall be gusset leather approximately 9 inches by 4 inches and be provided with two snap fasteners.

3.11.4 *Lock.*—The case shall be equipped with a six-hole solid-brass hasp and staple attached by small tubular rivets clinched, over small copper burrs, and a 1-inch pin tumbler padlock as illustrated in figure 6.

3.11.5 *Buckles.*—The strap buckles shall be 1 inch wide, inside dimensions.

3.11.6 *Handle.*—The handle shall be of the telescopic strap type as described in paragraph 3.11.7.5.

3.11.7 *Construction.*

3.11.7.1 *Front.*—Same as for type I. (See par. 3.9.7.1.)

3.11.7.2 *Flaps.*—Same as for type I. (See par. 3.9.7.2.)

3.11.7.3 *Straps.*—Each case shall be equipped with two leather straps 1 inch wide extending entirely around the case. Straps shall be creased ⅛ inch from each edge. One end shall have a turnback loop 1½ inches long for holding the buckle. A ½-inch leather keeper shall be sewed in the turnback loop near the end of the buckle. The end of the strap passing over the flap shall be punched with five holes 1¼ inches apart beginning 2½ inches from the end. The length of the strap, exclusive of the buckle, shall be not less than 36 inches for a two-pocket case, 38 inches for three pockets, and 40 inches for four pockets.


3.11.7.4 *Loops.*—Each strap shall be held in place by five leather loops. Two shall be on the back of the case, one on the front, one on the flap, and one on the adjustable handle. The adjustable handle loop shall be an extension of the loop with which the handle is attached.

3.11.7.5. *Handle.*—The handle shall be made of solid leather similar to the body of the case and shall be 6 inches long, ¾ inch thick, and 1 inch wide at the center, tapering to ¾ inch wide at the dees. The underside of the handle shall have a wound paper core ("Vickle") covered with $^{3}/_{64}$-inch-thick leather, to form a comfortable grip for a heavy case and shall have raw polished edges. The handle shall be reinforced with a flat steel strip not less than 0.015 inch thick and 0.30 inch wide. The ends of the strip shall loop around two dees attached to the end of the handle. The dees shall be 1 inch size and of heavy wire. A wood bar 14 inches long, 2 inches wide, and ¼ inch thick shall be covered with gusset leather by one continuous row of marginal stitching. The handle shall be attached to the bar by means of leather loops riveted to the bar. The loop straps shall be ⅞ inch wide and extend to within ½ inch of the ends of the bar and be riveted to form a loop for the straps. The rivets shall not extend through the leather covering on bottom of bar. The loops shall be reinforced with a metal strip, similar to the handle reinforcement, where contact is made with the dees of the handle, so that all carrying parts of the handle are metal against metal.

3.11.7.6 *Safety straps.*—Safety strap loops approximately ½ inch wide shall be riveted to the flap, pass over the wood bar under the main strap, and be riveted to the back of the case with capped bifurcated rivets. Safety straps shall have enough slack so as not to be subjected to the carrying strain when the case is closed. The purpose of the straps is to permit the case to be lifted by the handle, when open, without the main straps pulling out of the loops.

3.12 Type VI, inspector's case.—Type VI cases shall be the same as type I cases in all respects except as noted hereafter. The general design of type VI cases shall be as shown in figure 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

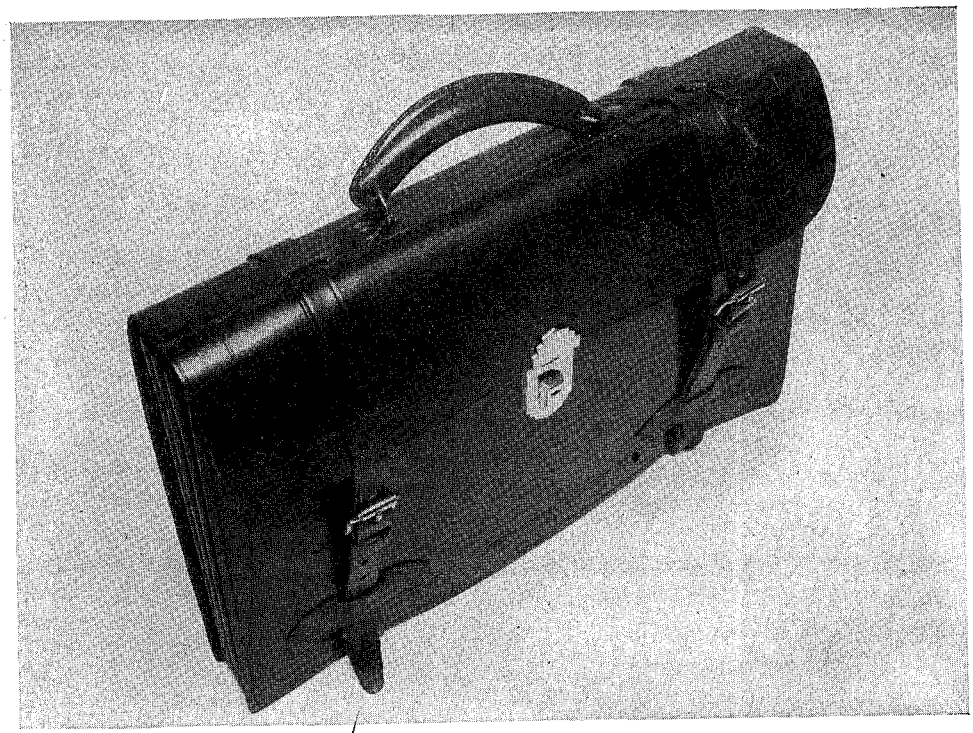

Inspector's case (A).



Inspector's case (B).

FIGURE 7.—Type VI, inspector's case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.12.1 *Size.*—The case shall be 17 inches long by 11 inches high.

3.12.2 *Pockets.*—The case shall have two large pockets, each having an expansion of 2 inches ±¼ inch; also two small pockets, each 6 inches wide and 7½ inches deep. Pockets shall be attached to the front of the partition and located approximately 1¼ inches from the bottom and ends of the partition. The expansion of the small pockets shall be not less than 1½ inches.

3.12.3 *Handle and flap reinforcements.*—The handle and flap reinforcements shall conform to the requirements of paragraph 3.9.7.5 except that the reinforcing strip shall be ¾ inch in width and 1/16 inch in thickness.

3.13 Type VII, officer's case.—The general design of type VII cases shall be as shown in figure 8.

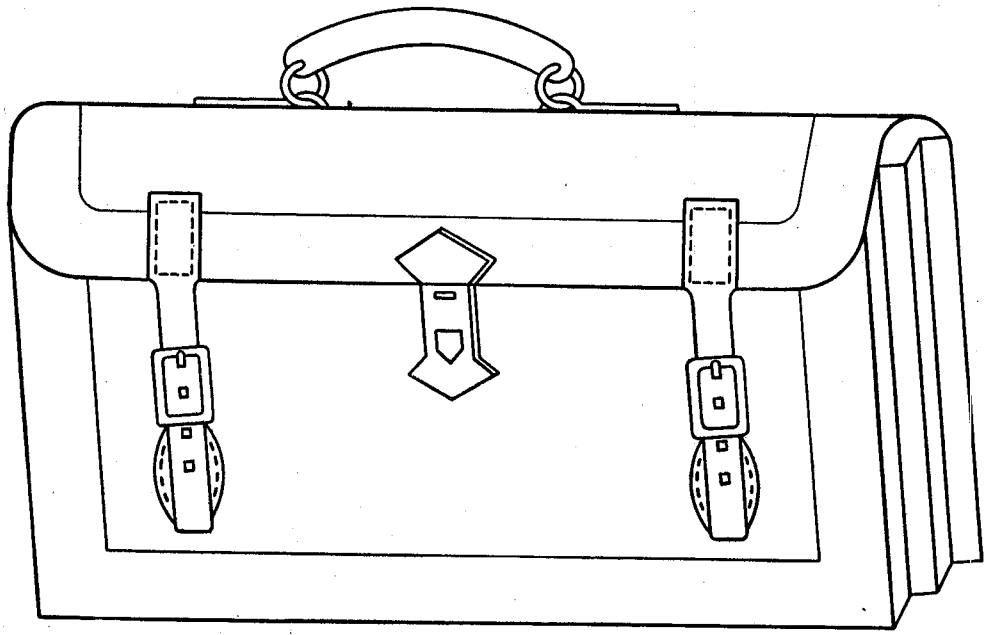


FIGURE 8.—Type VII, officer's case.

3.13.1 *Leather.*

3.13.1.1 *Front, flap and back, handle assemblies, billets, buckle chapes, and handle bar reinforcements.*—The front, flap and back, handle assemblies, billets, buckle chapes, and handle bar reinforcements shall be made from smooth case leather 6/64 inch thick.

3.13.1.2 *Gussets, pencil pocket, and envelope pocket.*—The gussets, pencil pocket, and envelope pocket shall be made from boarded case leather 3/64 inch thick.

3.13.1.3 *Partition.*—The partition shall be made from firm, split cowhide leather 5/64 inch thick. Each case shall have one full-length, full-width partition. Sewed to the partition there shall be a gusseted pocket approximately 5 inches by 7 inches. It shall be constructed so that the pockets have an expansion of 2 inches at the top and have a flap equipped with two snap fasteners made to allow for the full expansion. Inside the pocket, sewed to the partition, shall be four individual loops, made of a continuous piece of leather, to accommodate four standard wood pencils.

3.13.2 *Size.*—The case shall be 18 inches long by 11 inches high.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.13.3 *Gussets.*—Each pocket shall have a continuous gusset made from one piece of leather. Gussets shall be turned in at the top from 1 to 1½ inches and secured to the case and partitions at the top edges with capped bifurcated rivets of a color to match the color of the leather. Gussets shall be attached by cementing and stitching to the partitions, front and back of case.

3.13.4 *Pockets.*—The cases shall have two pockets, each with an expansion of 1½ inches. The expansion shall be measured on the inside of the pocket between the edges of the gusset. A plus or minus tolerance of ⅛ inch will be permitted.

3.13.5 *Lock.*—The case shall be equipped with a brass, three-position, extension lock approximately 1⅜ inches by 3⅜ inches suitably secured to the front of the case. The plate of the lock, on the inside of the case, shall be covered with a piece of buffing leather approximately 5 inches by 2¾ inches securely glued or cemented in place. The brass keeper shall be secured to the flap by a small tubular rivet.

3.13.6 *Buckles.*—The buckles shall be ⅞ inch wide.

3.13.7 *Handle.*—The handle shall be of the round "Vickle" type (paper wound), covered with smooth case leather and lock-stitched across the top. The thickness of the leather shall be not less than 3½ sixty-fourths inch. The handle shall be reinforced with a flat steel strip not less than 0.035 inch thick and 0.20 inch wide. The ends of the steel strip shall loop around two dee rings attached to the ends of the handle. The spread of the handle between the dees shall be 5½ inches ±¼ inch.

3.13.8 *Construction.*

3.13.8.1 *Back.*—The over-all length of the back including flap shall be 20±¼ inches.

3.13.8.2 *Front.*—A cut shall be made horizontally along the front of the case 1 inch below the top edge and 4½ inches on both sides of the center. The ends of cut shall extend diagonally to the top edge at a distance of 2 inches from the ends of the case (see fig. 4). The front, back, and flap of the case shall have a marginal crease approximately 1¼ inches from the edges.

3.13.8.3 *Flap.*—The corners of the flap shall be cut on a radius of approximately 3 inches.


3.13.8.4 *Straps.*—The case shall be equipped with two straps attached to the flap. Each strap shall be approximately 7 inches long, ¾ inch wide, and attached to the flap by stitching. Straps shall be creased ⅛ inch from each side. The center of the straps shall be approximately 4½ inches from the sides of the case. Straps shall have four suitable holes for the buckle prong.

3.13.8.5 *Buckle chapes.*—The buckle chapes holding the buckles shall be attached to the side of the case by riveting and stitching in line with the straps and approximately 1 inch from the bottom of the case.


3.13.8.6 *Handle and flap reinforcement.*—A spring steel reinforcing strip, ½ inch wide and 1/32 inch thick with smoothed ends, shall be placed on the inside of the flap immediately under the handle and shall extend across the flap to within ⅜ inch of either end. This strip shall be perforated in two places to permit attachment with solid or shallow-drilled tubular rivets which pass through the handle loops. The strip shall be covered with leather (see par. 3.9.1.1), approximately 1½ inches in width. The leather handle loops shall contain a steel strip through which the dee rings are passed. This construction shall be designed so as to allow all carrying parts to be metal against metal.

3.14 Type VIII, catalog case.—The general design of type VIII cases shall be as shown in figure 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

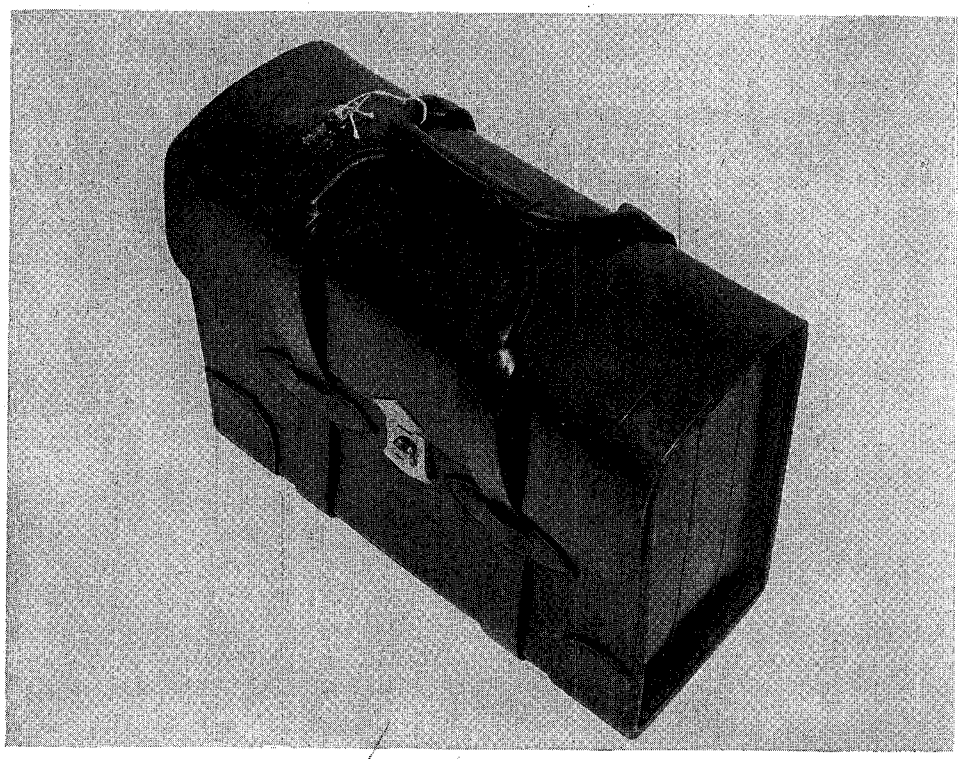

Catalog case (A).

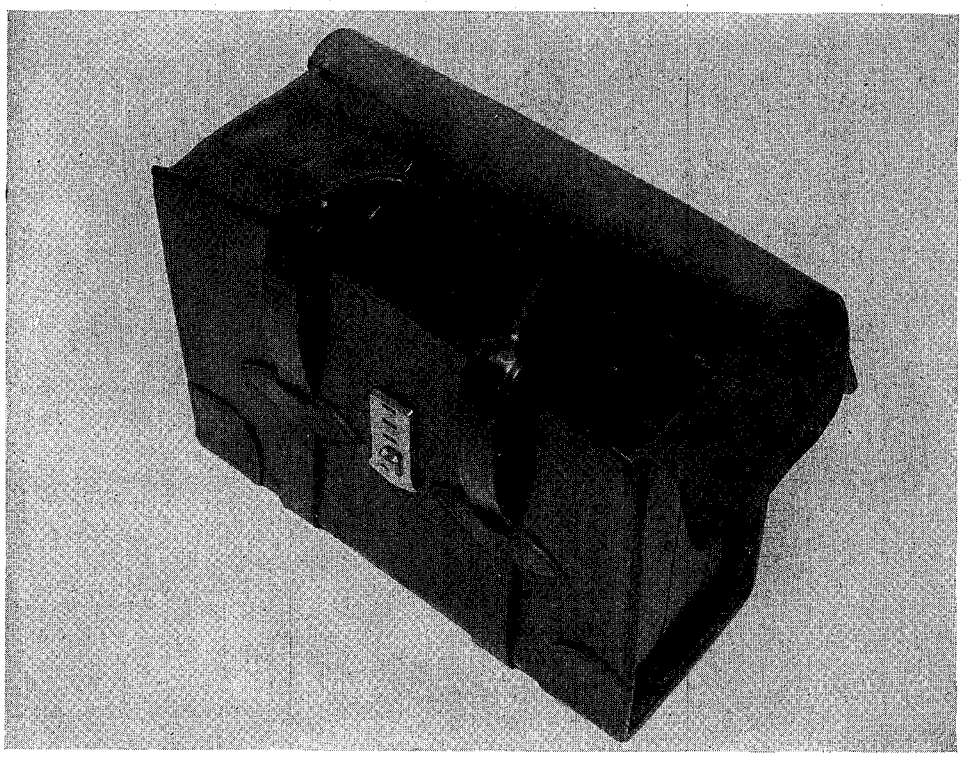

Catalog case (B).

FIGURE 9.—Type VIII, catalog case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

~~**3.14.1** *Leather.*~~

3.14.1.1 *Front, back, ends, straps, loops, and corners.*—The front, back, ends, straps, loops, and corners shall be made from smooth case leather not less than 7/64 inch in thickness.

3.14.1.2 *Bottom.*—The bottom shall be made from smooth case leather not less than 7/64 inch thick, reinforced with not less than 5/64-inch-thick split leather colored to match the case leather and with inner binders board 0.090 inch thick, for strengthening. The bottom shall have eight round metal studs, three on each side edge and two in the center, evenly spaced.

3.14.1.3 *Ends.*—The ends of the case shall be made from case leather 7/64 inch (7 oz.) thick, reinforced with firm, split cowhide 5/64 inch (5 oz.) thick.

3.14.1.3.1 *End flaps.*—The case shall have two end flaps, each 6 inches square (see fig. 8, open view) made of boarded case leather not less than 3/64 inch thick. They shall be sewed to the top of the ends between the case leather and split cowhide reinforcement.

3.14.1.4 *Partitions.*—Partitions shall be made from firm vetetable-tanned cowhide not less than 5/64 inch thick and shall be finished smooth on both sides and colored to match the case.

3.14.1.5 *Handles.*—The handles shall be double-strap type made of smooth case leather not less than 7/64 inch thick.

3.14.2 *Size.*—The case shall be 11 inches high, 16 inches long, and 6 inches wide.

3.14.3 *Locks.*—The case shall be equipped with a brass three-position extension lock. The lock shall be secured to the front of the case with six metal prongs. The prongs shall be not less than 0.030 inch thick, 0.20 inch wide, and 3/8 inch long. They shall pass through corresponding holes in a metal backing plate and be securely clinched. The backing plate shall be approximately 3 1/4 inches long by 1 7/8 inches wide and 0.020 inch thick. The backing plate shall be covered, after assembly, by cementing a piece of buffing leather approximately 3 inches by 4 inches over the plate. The hasp member of the lock shall be riveted to the flap with small tubular rivets.

3.14.4 *Construction.*

3.14.4.1 *Ends.*—The ends of the case shall be sewed to front, back, and bottom, flush-edged and finished completely around sides and bottom.

3.14.4.2 *Partitions.*—The partitions shall be sewed to the ends of the case and in addition, at the top edge there shall be capped bifurcated rivets of a color to match the case leather.

3.14.4.3 *Back, top, and front flap.*—The back, top, and front flap shall be one piece of leather with an over-all length of 23 inches. The corners of the flap shall be cut on a radius of approximately 2 inches. The back and front piece of leather shall be turned under the bottom of case for a distance of 1 inch and sewed to the bottom.

3.14.4.4 *Pockets.*—The case shall have two or three pockets, as specified in the invitation for bids. The two-pocket case shall have a 2-inch-wide pocket to the front and a 4-inch-wide pocket to the back of the case. The three-pocket case shall have three equally divided pockets 2 inches each in width. The front partition of either case shall have two flat pockets measuring 7 by 7 inches, made of not less than 3/64-inch-thick boarded case leather.

3.14.4.5 *Handles.*—The handles shall be of the double type formed by a continuous strap approximately 1 1/4 inches wide extending entirely around the case. The strap may be of one or two pieces. Joints shall be stitched and riveted, and located at the bottom of the case. The handles shall be held together at the top by a 4 1/2- by 4 1/2-inch leather tab with two metal snap fasteners. The tab shall be fastened to one strap by stitching. The handle strap shall be held to the body of the case by six loops.

3.14.4.6 *Loops.*—The loops shall be securely sewed on, two on the front of the case, two on the back, and two on the bottom covering the riveted ends of the straps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.14.4.7 *Corners.*—The lower corners shall be reinforced by a securely sewed strip of case leather not less than 5/64 inch thick, approximately 2½ inches wide, with rounded inside corners, and extending across the bottom and up the front and back panels of the case approximately 2½ inches.

3.15 Type IX, brief bag.—The general design of type IX brief bag shall be as shown in figure 10.

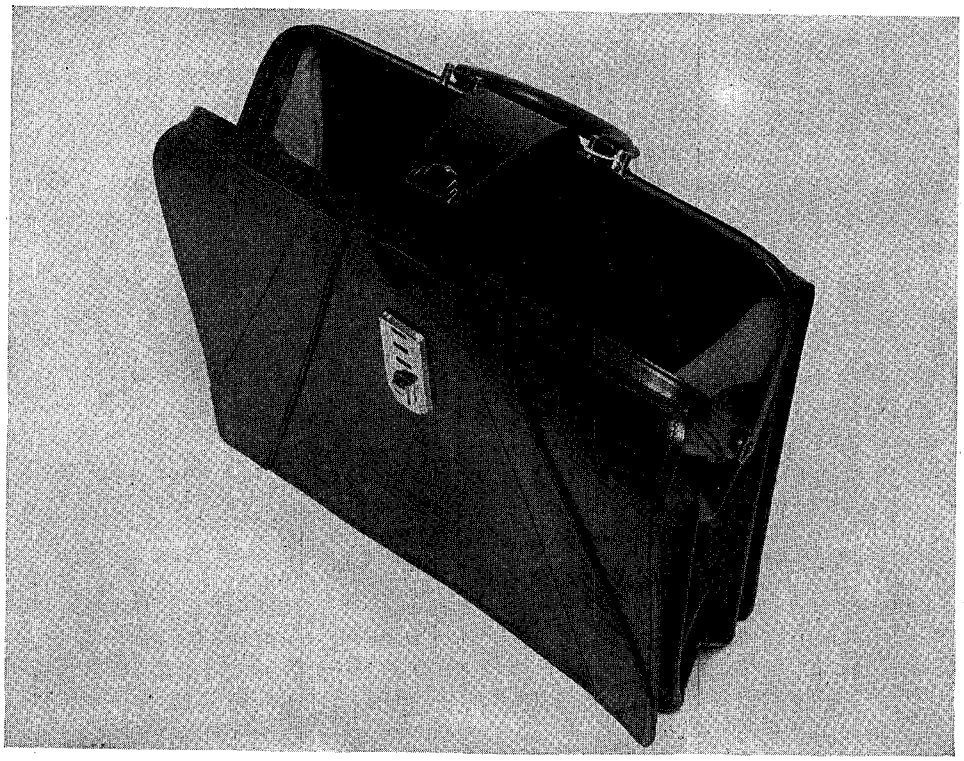


FIGURE 10.—Type IX, brief bag.

3.15.1 *Leather.*

3.15.1.2 *Front, back, lock, flap, and reinforcing strips.*—Front, back, lock, flap, and reinforcing strips shall be smooth case leather 6/64 inch (6 oz.) thick.

3.15.1.3 *Gusset.*—The gusset leather shall be one piece of boarded top grain cowhide 3/64 inch (3 oz.) thick.

3.15.1.4 *Partitions.*—The partitions shall be made from firm split cowhide 4/64 inch (4 oz.) thick, finished smooth on both sides and colored to match the case. These shall be two full-length partitions, forming pockets approximately 8 inches deep, attached to the ends and bottom of the case by stitching.

3.15.2 *Size.*—The case shall be 16 inches long and 14 inches high, measured on the outside back of case.

3.15.3 *Pockets.*—The case shall have three pockets. The two outside pockets shall have an expansion of 1½ inches and the middle pocket, an expansion of 4 inches.

3.15.4 *Locks.*—The case shall be equipped with a brass three-position extension lock. The lock shall be secured to the front of the case with six metal prongs. The prongs shall be not less than 0.030 inch thick, 0.20 inch wide, and 3/8 inch long. They shall pass through corresponding holes in a metal backing plate and securely clinched. The backing plate shall be approximately 3¼ inches long by 1⅞ inches wide and 0.020 inch thick. The backing plate shall be covered, after assembly, by cementing a piece of buffing leather approximately 3 inches by 4 inches over the plate. The hasp member

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

of the lock shall be riveted to the flap with small tubular rivets.

3.15.5 *Handle and handle posts.*

3.15.5.1 *Handle.*—The handle shall be of the round "Vickle" type (paper wound) covered with smooth case leather and lock-stitched across the top. The thickness of the leather shall be not less than 3/64 inch. The handle shall be reinforced with a flat steel strip not less than 0.035 inch thick and not less than 0.20 inch wide. The ends of the steel strip shall be formed into loops so that all carrying parts will be metal against metal.

3.15.5.2 *Handle posts.*—The handle posts shall be similar in design to that shown in figure 10. The posts shall be 1/4 inch in diameter and shall be fitted with a 1/8-inch brass bar for attaching the handle loops. The posts shall extend through the metal frame and be securely riveted on inside. The posts shall be positioned on the case so that the spread of the handle will be 4 1/2 inches ±1/4 inch.

3.15.6 *Reinforcements.*

3.15.6.1 *Front and back.*—The front and back of the case shall have two diagonal reinforcement strips of the general design illustrated in figure 10. The corner of the leather cover shall be 3 inches wide and the top 1 1/4 inches wide. The reinforcement strips shall be clock spring steel 0.025 inch thick, 1/2 inch wide, and 8 inches long, with rounded ends. The steel strip shall be bonderized and cemented between the body of the case and the leather covering. The leather covering shall be marginal-stitched to the case.

3.15.6.2 *Gusset.*—The ends of the gusset at both hinge joints shall be reinforced with case leather 3/64 inch (3 oz.) thick, cut semicircular on approximately 1-inch radius. The leather reinforcements shall be stitched to the inside and centered at the hinged joints.

3.15.7 *Frame.*—The case shall have a steel frame 0.075 inch thick of half-hard cold-rolled steel and shall have two hinges formed by two heavy shallow-drilled tubular rivets. The rivets shall be peened on the inside over metal washers. The hinges shall have metal spacers between the frame sections of the hinge joints.

3.15.8 *Lock flap.*—The lock flap shall be case leather lined with gusset leather (total thickness approximately 9/64 inch (9 oz.)). The exposed length of the flap shall be 5 inches and the width approximately 2 1/2 inches. The end to which the lock hasp is riveted shall be rounded.

3.15.9 *Drop bottom.*—The case shall have a drop bottom 4 inches wide by approximately 14 inches long, securely attached to the bottom of one partition and designed so that it will drop into the center section and form a rigid support.

3.15.10 *Metal.*—The lock, hasp, and post loops shall be brass. All other metal parts shall be brass or steel treated so as to be noncorrosive.

3.15.11 *Construction.*—Brief bags shall open at the top, have a metal frame with hinges, and shall have one handle and a collapsible bottom. The bag shall be sewed to the cover of the metal frame and the gussets sewed to the sides and partitions. The lock flap shall be sewed between the front side of the bag and frame and shall be centered. The lock shall be attached to the side directly below the lock flap, approximately 2 1/2 inches below the top of the bag. All stitching at the end of seams not cross-stitched, such as the top of partitions on ends of bag, shall be reinforced with a bifurcated rivet and capped on inside of bag. The bottom of the bag shall have six metal studs evenly spaced. The studs shall have bifurcated ends and shall be clinched over a reinforcement disc of case leather on the inside of the bag.

3.16 Identification of product.—The following information shall be permanently and lightly marked on the underside of the closing flap of the case or inside cover, in legible letters at least 3/16 inches high:

Case, Brief, Leather.
Type ---------- (as applicable).
Fed. Spec. KK–C–121.
Stock No. ----------.
Contract or order number.
Manufacturer's name or trade-mark.
U. S. Property.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.17 Workmanship.—Brief cases shall be free from defects which affect the appearance or which may affect the serviceability. Stitching shall be in regular line. Thread tension of all machine stitching shall be properly maintained so that the lock will be imbedded in the materials sewed. Creasing, edging, and finishing of leather shall be done in an accurate and neat manner. All exposed edges of the leather shall be dyed the same color as the face of the leather. All rivets shall be securely and neatly set.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling.

4.1.1 *Cases.*—Unless otherwise specified, one case of each type and color shall be taken from each delivery of 100, or fraction thereof, for inspection and tests.

4.1.1.1 *Thread.*—Unless otherwise specified, the contractor shall furnish not less than 30 yards of thread and an affidavit stating that the sample was taken from the lot used in stitching the bags.

4.2 Inspection.—All cases shall be inspected for compliance with this specification with respect to construction, workmanship, dimensions, finish, color, stitching, presence of parts, and defects.

4.3 Tests.

4.3.1 *Materials.*—The materials in the cases shall be tested in accordance with the following Federal specifications:

Thread, mildew resistance	CCC–T–191 (method 4750)
Leather, mildew resistance	KK–L–311 (method 410.1)
Leather, color fastness (resistance to crocking)	KK–L–311 (method 220.1)
Thread	V–T–291
Case leather	KK–L–154
Brass	QQ–B–611

4.3.2 *Thickness of leather.*—The thickness of the leather parts shall be determined as described in Federal Specification KK–L–311, method 210.1, paragraph 3c.

5. PREPARATION FOR DELIVERY

5.1 Packaging.—Unless otherwise specified, commercial packages will be acceptable.

5.2 Packing.—Unless otherwise specified, the subject commodity shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maximum protection from normal hazards of transportation.

5.3 Marking.—Unless otherwise specified, shipping containers shall be marked with the specification number, stock number, the name of the article, and the type and quantity contained therein, as defined by the contract or order under which the shipment is made, the name of the contractor, and the number of the contract or order.

6. NOTES

6.1 Ordering data.—Purchasers should exercise any desired options offered herein and should specify the type, color, and number of pockets required, and whether treatment for mildew resistance is required for leather and thread used in cases. (See 1.2.1, 1.2.3, 3.1.1.1, 3.1.2.1, 3.11.3, 3.14.4.4, 4.1, 5.1, 5.2, 5.3 and 6.2.)

6.2 Bid sample.—Each bidder should be required to submit one case of each type he proposes to furnish, to show color, finish, stitching, construction, and workmanship.

6.3 Federal specifications do not include all types, classes, grades, sizes, etc., of the commodities indicated by the titles of the specifications, or which are commercially available, but are intended to cover the types, etc., which are suitable for Federal Government requirements.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specifications and standard, of the issues in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments:

7.2 Army, Navy, and Air Force.

7.2.1 *Applicable specifications and standard:*

Federal Specifications:

NN–B–591—Boxes; Fiberboard, Wood-Cleated (for Domestic Shipment).[1]

NN–B–601—Boxes; Wood-Cleated-Plywood, for Domestic Shipment.[1]

NN–B–621—Boxes; Wood, Nailed and Lock-Corner.

NN–B–631—Boxes; Wood, Wirebound (for Domestic Shipment).

LLL–B–631—Boxes; Fiber, Corrugated (for Domestic Shipment).

LLL–B–636—Boxes; Fiber, Solid (for Domestic Shipment).

Military Specifications:

JAN–P–105—Packaging and Packing for Overseas Shipment—Boxes, Wood, Cleated, Plywood.[1]

JAN–P–106—Packaging and Packing for Overseas Shipment—Boxes; Wood, Nailed.

MIL–B–107—Boxes, Wood, Wirebound (Overseas Type).[1]

JAN–P–108—Packaging and Packing for Overseas Shipment—Boxes, Fiberboard (V–Board and W–Board), Exterior and Interior.[1]

JAN–P–125—Packaging and Packing for Overseas Shipment—Barrier-Materials, Waterproof, Flexible.

JAN–P–138—Packaging and Packing for Overseas Shipment—Boxes, Wood, Fiberboard-Lined.[1]

JAN–P–140—Packaging and Packing for Overseas Shipment—Adhesives, Water-Resistant, Case-Liner.[1]

Military Standard:

MIL-STD–129—Marking of Shipments.

Navy Department Specification:

General Specifications for Inspection of Material.[1]

[1] Applicable only to Navy purchases.

(Copies of specifications, standards, and drawings required by the contractor in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

7.2.2 *Inspection (Navy only).*—For Naval purchases, the general inspection procedures shall be in accordance with Navy Department General Specifications for Inspection of Material.

7.2.3 *Packaging.*

7.2.3.1 *Army and Air Force.*—The cover of each brief case shall be closed and latched, and the billets passed through the buckles. The keys shall be securely tied to one of the buckles or to the carrying handle. Each case shall then be wrapped with not less than two thicknesses of tissue paper having a minimum basis weight of 20 pounds per ream. Each case shall then be packaged in a snug-fitting corrugated fiberboard box, style RSC, with a minimum bursting strength of 200 p. s. i. The opening of the box shall be on the panel having the smallest dimension and the box fabricated so that the flutes are parallel to the opening. All flaps of fiberboard containers shall be securely sealed with an adhesive commercially used for the specific product being packed, by application throughout the entire area of contact between the flaps.

7.2.3.2 *Navy.*—Brief cases shall be packaged as specified in 5.1.

7.2.4 *Packing.*

7.2.4.1 *For domestic shipment.*

7.2.4.1.1 *Army and Air Force.*—Twelve brief cases, individually packaged as specified in 7.2.3.1, shall be packed in a snug-fitting corrugated or solid fiberboard container conforming to Federal Specifications LLL–B–631 and LLL–B–636, respectively. The minimum bursting strength of the board shall be 275 p. s. i. All flaps of fiberboard containers shall be securely sealed, with an adhesive commercially used for the specific product being packed, by application throughout the entire area of contact between the flaps. A nailed wood box constructed in conformance with Federal Specification NN–B–621, style 2 or 4, may be used as an alternate domestic shipping container.

7.2.4.1.2 *Navy.*—Brief cases, packaged as specified in 7.2.3.2, shall be packed in wood-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

cleated fiberboard, wood-cleated plywood, nailed wood, wirebound wood, corrugated fiber, or solid fiber boxes, conforming to Federal Specifications NN–B–591, NN–B–601, NN–B–621, NN–B–631, LLL–B–631, and LLL–B–636, respectively. The gross weight of wood boxes shall not exceed approximately 200 pounds. The gross weight of fiberboard boxes shall be subject to the limitation of the applicable box specification.

7.2.4.2 *For overseas shipment.*

7.2.4.2.1 *Army and Air Force.*—Twelve brief cases, individually packaged as specified in 7.2.3.1, shall be packed in a nailed wood box, style 2 or 4, constructed, closed, and strapped in conformance with Military Specification JAN–P–106, for type 2 load. Each nailed wood box shall be provided with an unsealed liner made of waterproof barrier-material conforming to type L–2 or M of Military Specification JAN–P–125. All joints or seams shall overlap not less than 3 inches.

7.2.4.2.2 *Navy.*—Brief cases, packaged as specified in 7.2.3.2, shall be packed in cleated plywood, nailed wood, wirebound wood, fiberboard, or fiberboard-lined wood boxes, conforming to Military Specifications JAN–P–105, JAN–P–106, MIL–B–107, JAN–P–108, and JAN–P–138, respectively. The gross weight of wood boxes shall not exceed approximately 200 pounds; and of fiberboard boxes, approximately 70 pounds. Contents shall be enclosed within a sealed waterproof bag, or its equivalent, made from material conforming to Military Specification JAN–P–125, for case liner material. Seams and closures shall be sealed with adhesive conforming to Military Specification JAN–P–140.

7.2.5 *Labeling and marking.*

7.2.5.1 *Interior containers.*

7.2.5.1.1 *Army.*—Each corrugated fiberboard box, containing one brief case, shall be legibly labeled, stenciled, or printed with the following information:

Nomenclature.
Stock number.
Quantity.
Name and address of manufacturer.
Contract or order number.

7.2.5.1.2 *Navy.*—Each interior package shall be durably and legibly marked with the following information:

Material description.
Supplier or manufacturer.
Contract or order number.
Fed. Spec. KK–C–121.
Quantity contained.
Date packed.
Navy stock number.

7.2.5.1.3 *Air Force.*—Each interior package shall be durably and legibly marked with the following information in such a manner that the markings will not become damaged when the packages are opened:

Case, Brief, Leather.
Type ----------.
Fed. Spec. KK–C–121.
Stock No.
Order number.
Quantity ----------.
Manufacturer's name or trade-mark.
Name of contractor (if not the same as the manufacturer).

7.2.5.2 *Shipping containers.*

7.2.5.2.1 *Army and Air Force.*—Shipping containers shall be marked in accordance with Military Standard MIL–STD–129 except that service color marking shall not be required on domestic-type shipping containers.

7.2.5.2.2 *Navy.*—In addition to any special marking required by the contract or order, marking of shipping containers shall be in accordance with Military Standard MIL–STD–129.

7.2.6 *Ordering data.*—Procurement documents should specify whether domestic or overseas packing and marking are required (see 7.2.4 and 7.2.5).

NAVY INTEREST: A *MC* Md S

This specification is a part of Section IV, Part 5, of the Federal Standard Stock Catalog

For sale by the Superintendent of Documents, U. S. Government Printing Office
Washington 25, D. C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.