MILITARY SPECIFICATION

MICROCIRCUITS, CMOS, ANALOG SWITCH WITH DRIVER,
MONOLITHIC SILICON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for silicon, CMOS, monolithic, analog switches with drivers. Three product assurance classes and a choice of case outline and lead finish are provided for each type and are reflected in the complete part number.

1.2 Part number. The part number shall be in accordance with MIL-M-38510.

1.2.1 Device type. The device type shall be as follows:

Device type	Circuit
01	Two-channel, SPST switch, TTL input compatible
02	One-channel, SPDT switch, TTL input compatible
03	Two-channel, DPST switches, TTL input compatible
04	Two-channel, SPDT switch, TTL input compatible
05	Two-channel, SPST switch, CMOS input compatible
06	One-channel, SPDT switch, CMOS input compatible
07	Two-channel, DPST switch, CMOS input compatible
08	Two-channel, SPDT switches, CMOS input compatible

NOTE: A channel is defined as a driver with associated switches.

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outline. The case outline shall be designated as follows:

Outline letter	MIL-M-38510, appendix C, case outline
C	D-1 (14-lead, 1/4" x 3/4", dual-in-line)
D	F-2 (14-lead, 1/4" x 3/8", flat pack)
I	A-2 (10-lead, can)

1.3 Absolute maximum ratings.

V_{IN} to ground	V+18, V−36 Vdc
$+V_{CC}$ to $-V_{CC}$	+36 Vdc
$+V_{CC}$ to ground	+36 Vdc
V_S or V_D	$+V_{CC}$, $-V_{CC}$
Current (any terminal)	30 mA
Pulsed 1 ms, 10% duty cycle (S or D only)	100 mA
Storage temperature range	-65° C to +150°C
Lead temperature (soldering, 60 seconds)	300°C
Junction temperature	T_J = 175°C

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center, RBE-2, Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

1.4 Recommended operating conditions.

$+V_{CC}$	+15 Vdc
$-V_{CC}$	-15 Vdc
GND	0 Vdc
Ambient operating temperature range (T_A)	-55°C to +125°C

1.5 Power and thermal characteristics.

Package	Case outline	Maximum allowable power dissipation	Maximum θ_{JC}	Maximum θ_{JA}
Dual-in-line	C	400 mW @ T_A = 125°C	35°C/W	120°C/W
14-lead FP	D	350 mW @ T_A = 125°C	60°C/W	140°C/W
10-lead can	I	250 mW @ T_A = 125°C	40°C/W	140°C/W

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and 1.2.3 herein.

3.2.1 Circuit diagram and terminal connections. The circuit diagram and terminal connections shall be as specified on figure 3.

3.2.2 Schematic circuit. The schematic circuit shall be as specified on figure 4.

3.3 Lead material and finish. Lead material and finish shall be in accordance with MIL-M-38510.

3.4 Electrical performance characteristics. The electrical performance characteristics of table I apply over the full operating ambient temperature range of -55°C to +125°C and for supply voltages as indicated in 1.4, unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Characteristic	Symbol	Conditions V_{CC} = ±15 V, GND = 0 V Unless otherwise specified	Temperature	Device type	Limits Min	Limits Max	Unit
Drain-source ON resistance	R_{DS}	V_D = 10 V, I_S = 10 mA See figure 5	T_A = -55°C, 25°C	All		50	Ω 1/
			T_A = 125°C	All		75	
		V_D = 10 V, I_S = -10 mA See figure 5	T_A = -55°C, 25°C	All		50	
			T_A = 125°C	All		75	
		V_D = -7.5 V, V_{CC} = ±10 V, I_S = 10 mA See figure 5	T_A = -55°C, 25°C	All		70	
			T_A = 125°C	All		100	
		V_{CC} = ±10 V, V_D = 7.5 V, I_S = -10 mA See figure 5	T_A = -55°C, 25°C	All		70	
			T_A = 125°C	All		100	
Channel ON leakage current	$I_{D(ON)}$	V_S = V_D = 14 V (V_{IN} - see 3.4.1) See figure 6	T_A = -55°C, 125°C	All	-200	200	nA
			T_A = 25°C	All	-2	+2	
		V_S = V_D = -14 V (V_{IN} - see 3.4.1) See figure 6	T_A = -55°C, 125°C	All	-100	100	
			T_A = 25°C	All	-1	+1	
Drain OFF leakage current	$I_{D(OFF)}$	V_D = 14 V, V_S = -14 (V_{IN} - see 3.4.1) See figure 9	T_A = -55°C, 125°C	All	-100	100	
			T_A = 25°C	All	-1	+1	
		V_D = -14 V, V_S = 14 V (V_{IN} - see 3.4.1) See figure 9	T_A = -55°C, 125°C	All	-100	100	
			T_A = 25°C	All	-1	+1	
Source OFF leakage current	$I_{S(OFF)}$	V_D = 14 V, V_S = -14 (V_{IN} - see 3.4.1) See figure 10	T_A = -55°C, 125°C	All	-100	100	
			T_A = 25°C	All	-1	+1	
		V_D = -14 V, V_S = 14 V (V_{IN} - see 3.4.1) See figure 10	T_A = -55°C, 125°C	All	-100	100	
			T_A = 25°C	All	-1	+1	
Input current input voltage low	I_{IL}	V_{IN} = 0 V See figure 8	-55°C ≤ T_A ≤ 125°C	All	-1		µA
Input current input voltage high	I_{IH}	V_{IN} = 5 V See figure 8	-55°C ≤ T_A ≤ 125°C	01,02, 03,09	-1		µA
		V_{IN} = 15 V See figure 8	-55°C ≤ T_A ≤ 125°C	All		1	µA
Positive supply current	$+I_{CC}$	V_{IN} = 0.8 V See figure 7	T_A = -55°C, 25°C	01,02, 03,04		0.01	mA
			T_A = 125°C,	01,02, 03,04		0.1	
		V_{IN} = 4 V See figure 7	T_A = -55°C,	01, 03,04		2.0 2/	
			T_A = 125°C, 25°C	01, 03,04		1.0 3/	
		V_{IN} = 0 V See figure 7	T_A = -55°C, 25°C	05,06, 07,08		0.01	
			T_A = 125°C	05,06, 07,08		0.1	
		V_{IN} = 15 V See figure 7	T_A = -55°C, 25°C	05,06, 07,08		0.01	
			T_A = 125°C	05,06, 07,08		0.1	
Negative supply current	$-I_{CC}$	V_{IN} = 0.8 V See figure 7	T_A = -55°C, 25°C	01,02, 03,04	-0.01		
			T_A = 125°C	01,02, 03,04	-0.1		
		V_{IN} = 4 V See figure 7	T_A = -55°C, 25°C	01,02, 03,04	-0.01		
			T_A = 125°C	01,02, 03,04	-0.1		
		V_{IN} = 0 V See figure 7	T_A = -55°C, 25°C	05,06, 07,08	-0.01		
			T_A = 125°C	05,06, 07,08	-0.1		
		V_{IN} = 15 V See figure 7	T_A = -55°C, 25°C	05,06, 07,08	-0.01		
			T_A = 125°C	05,06, 07,08	-0.1		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics -Continued.

Characteristic	Symbol	Conditions V_{CC} = ±15 V, GND = 0 V Unless otherwise specified	Temperature	Device type	Limits Min	Limits Max	Unit
Time to turn ON	t_{ON}	See figure 11	T_A = -55°C	01,02 03,04		260	ns
				05,06 07,08		225	
			T_A = 25°C	01,02 03,04		300	
				05,06 07,08		250	
			T_A = 125°C	01,02 03,04		360	
				05,06 07,08		290	
Time to turn OFF	t_{OFF}	See figure 11	T_A = -55°C	01,02 03,04		230	
				05,06 07,08		140	
			T_A = 25°C	01,02 03,04		250	
				05,06 07,08		150	
			T_A = 125°C	01,02 03,04		290	
				05,06 07,08		160	
Single channel isolation	V_{ISO}	f = 1 MHz See figure 12 V_{GEN} = 1 V_{p-p}	T_A = 25°C	All	50		dB
Crosstalk between channels	V_{CT}	f = 1 MHz See figure 13 V_{GEN} = 1 V_{p-p}	T_A = 25°C	All	50		dB
Charge transfer error	V_{CTE}	V_S = GND See figure 14	T_A = 25°C	All		15	mV
Break-before-make time delay	t_D	See figure 15	-55°C ≤ T_A ≤ 125°C	02,04 06,08	20		ns
Driver input capacitance	C_{C1}	V_{IN} = 0 V	T_A = 25°C	All		6	pf
	C_{C2}	V_{IN} = 15 V	T_A = 25°C	All		3.5	
Switch input capacitance	C_{IS}		T_A = 25°C	All		14	pf
Switch output capacitance	C_{OS}		T_A = 25°C	All		14	pf
Input test voltage	V_{ZAP}	C_1 = 100 pf, R_Z = 1.5 k (see 4.5.3)	-55°C ≤ T_A ≤ 125°C	All	400		V

1/ The listed resistance limits correspond to the following voltage values:
9.5 V, -9.5 V ⟶ 50Ω
9.25 V, -9.25 V ⟶ 70Ω
9.3 V, -9.3 V ⟶ 70Ω
9.0 V, -9.0 V ⟶ 100Ω

2/ $+I_{CC}$ = 1.0 mA max for device 02 only.

3/ $+I_{CC}$ = .5 mA max for device 02 only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

3.4.1 Switch operation. The analog switches are guaranteed to turn "on" with either a "low" input ($V_{IL} \leq 0.8$ V for the 01-04 devices and $V_{IL} \leq 3.5$ V for the 05-08 devices) or "high" input ($V_{IH} \geq 4$ V for the 01-04 devices and $V_{IH} \geq 11$ V for the 05-08 devices) as specified below.

Device type	V_{IN}	Switch on	Switch off
01,05	V_{IL}	---	1,2
	V_{IH}	1,2	---
02,06	V_{IL}	2	1
	V_{IH}	1	2
03,07	V_{IL}	---	1,2,3,4
	V_{IH}	1,2,3,4	---
04,08	V_{IL}	3,4	1,2
	V_{IH}	1,2	3,4

3.5 Electrical test requirements. Electrical test requirements shall be as specified in table III for the applicable device type and device class. The subgroups of table III and the limits of table IV which constitute the minimum electrical test requirements for screening, qualification and quality conformance, by device class are specified in table II.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III)		
	Class S devices	Class B devices	Class C devices
Interim electrical parameters (pre burn-in) (method 5004)	1	1	None
Final electrical test parameters (method 5004)	1*,2,3,9	1*,2,3,9	1
Group A test requirements (method 5005)	1,2,3,9,10, 11,12***,13	1,2,3,9,10, 11,12***,13	1,2,3,9
Group C end-point and group B class S electrical parameters (method 5005)	1,2,3 and table IV delta limits	1 and table IV delta limits	1 and table IV delta limits
Additional electrical subgroups for group C periodic inspections	N/A	None	10,11,12,13
Group D end-point electrical parameters (method 5005)	1,2,3	1	1
Additional electrical subgroups for group D periodic inspections	(4,7)**	(4,7)**	(4,7)**

*PDA applied to subgroup 1 (see 4.3d).
**See 4.4.4b.
***See 4.4.1d.

3.6 Marking. Marking shall be in accordance with MIL-M-35810. At the option of the manufacturer, marking of the country of origin may be omitted from the body of the mirocircuit, but shall be retained on the initial container.

3.7 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 57 (see MIL-M-38510, appendix E.)

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

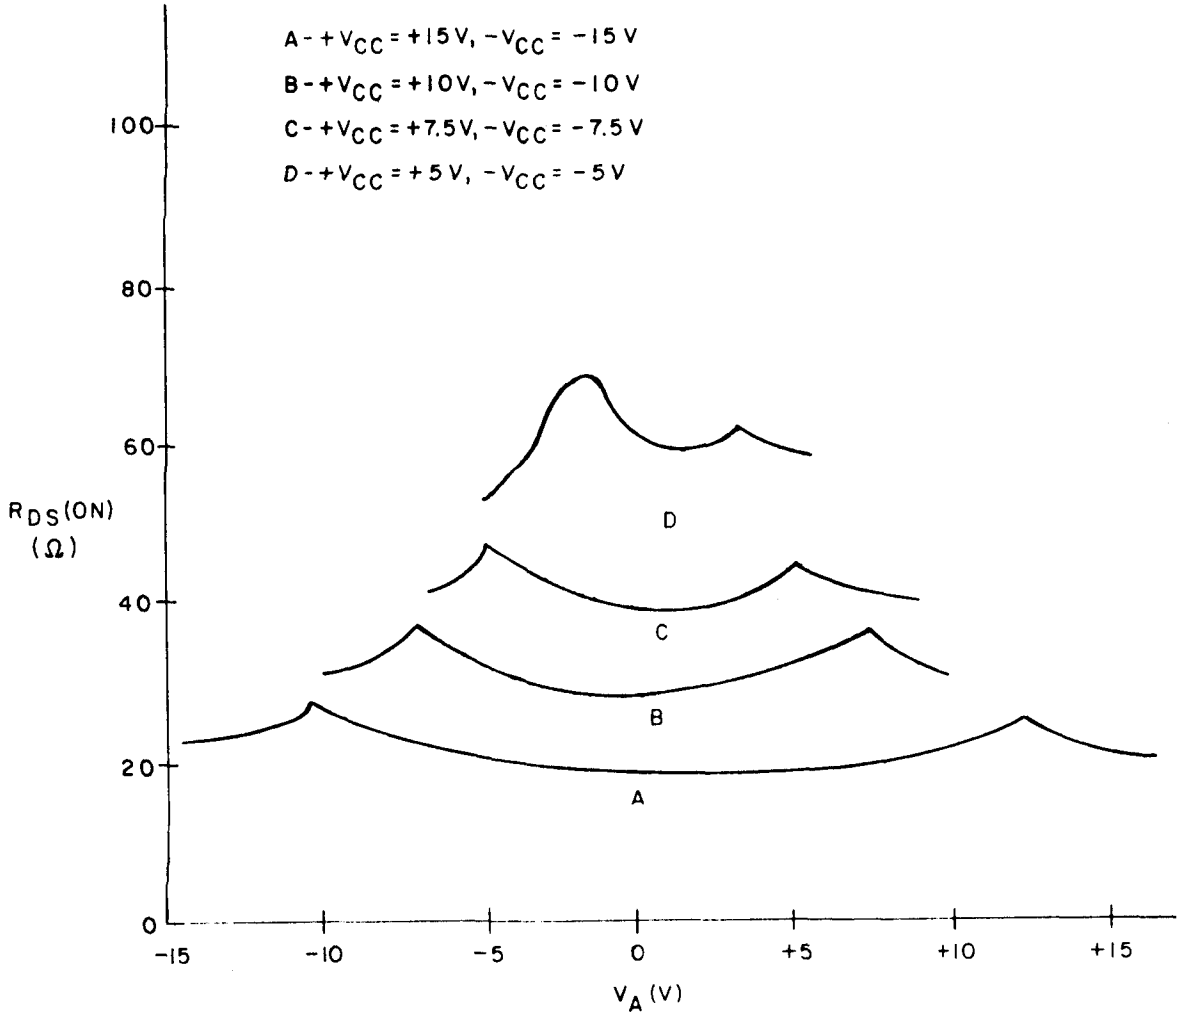


FIGURE 1. $R_{DS(ON)}$ versus V_A and power supply voltage.
(For reference only.)

Source: https://assist.dla.mil - Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

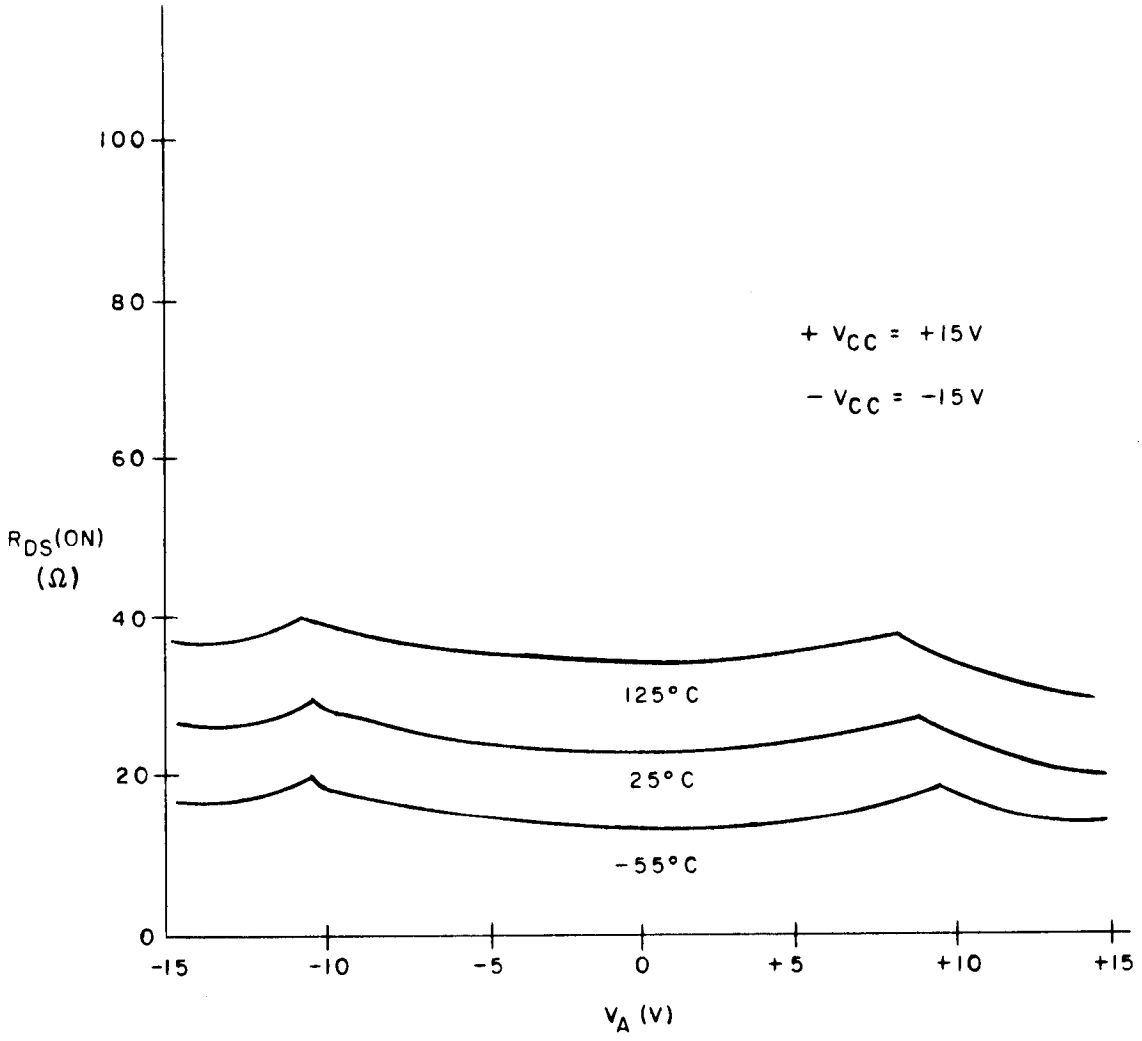



FIGURE 2. $R_{DS(ON)}$ versus V_A and temperature.
(For reference only.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.


Device types 01 and 05

Case I


V_1 (SUBSTRATE AND CASE)

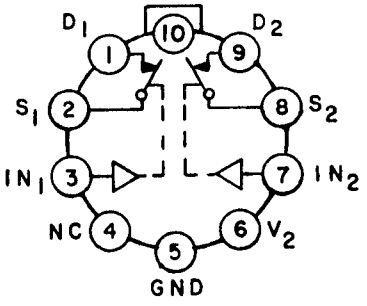

Case C

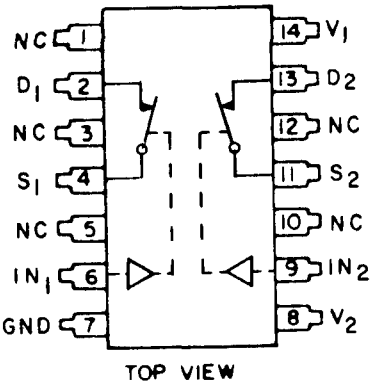


Case D

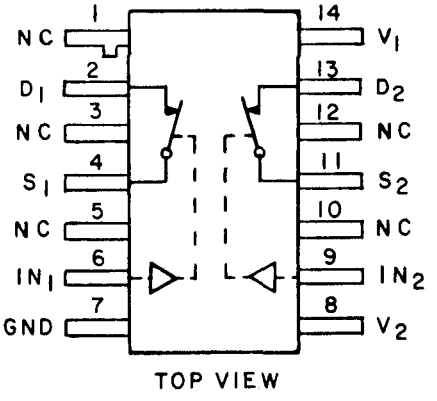


Device types 02 and 06

Case I


V_1 (SUBSTRATE AND CASE)

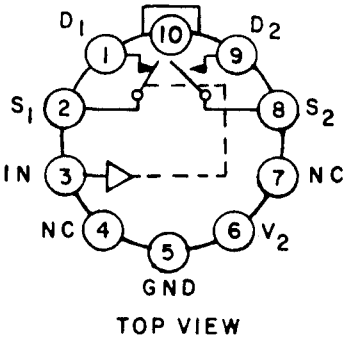

Case C

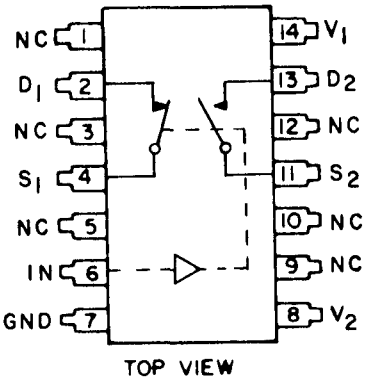

Case D

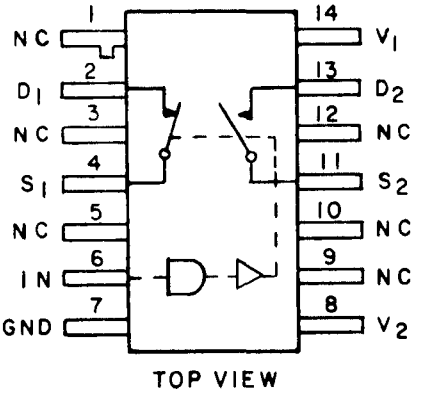


Switch states are for logic "1" input
(Positive logic)

FIGURE 3. Terminal connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.


Device types 03 and 07

Case C

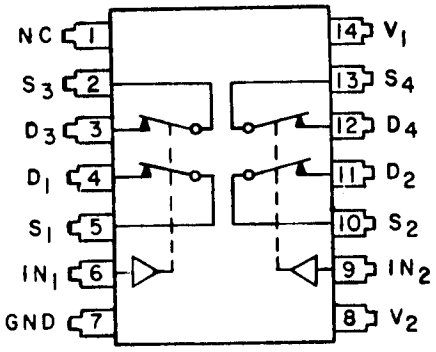

TOP VIEW


Case D

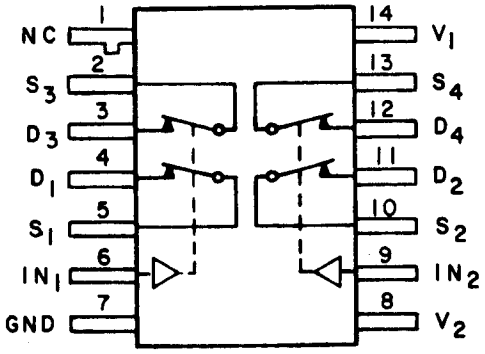

TOP VIEW


Device types 04 and 08

Case C

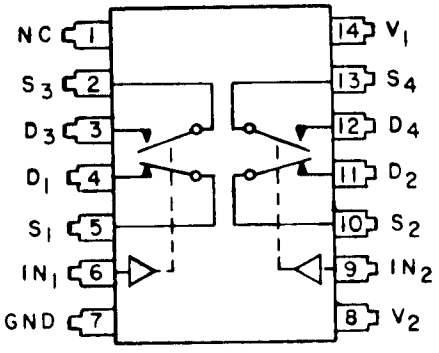

TOP VIEW

Case D

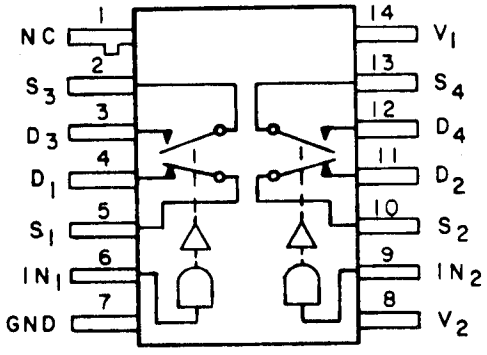

TOP VIEW

Switch states are for logic "1" input
(Positive logic)

FIGURE 3. Terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

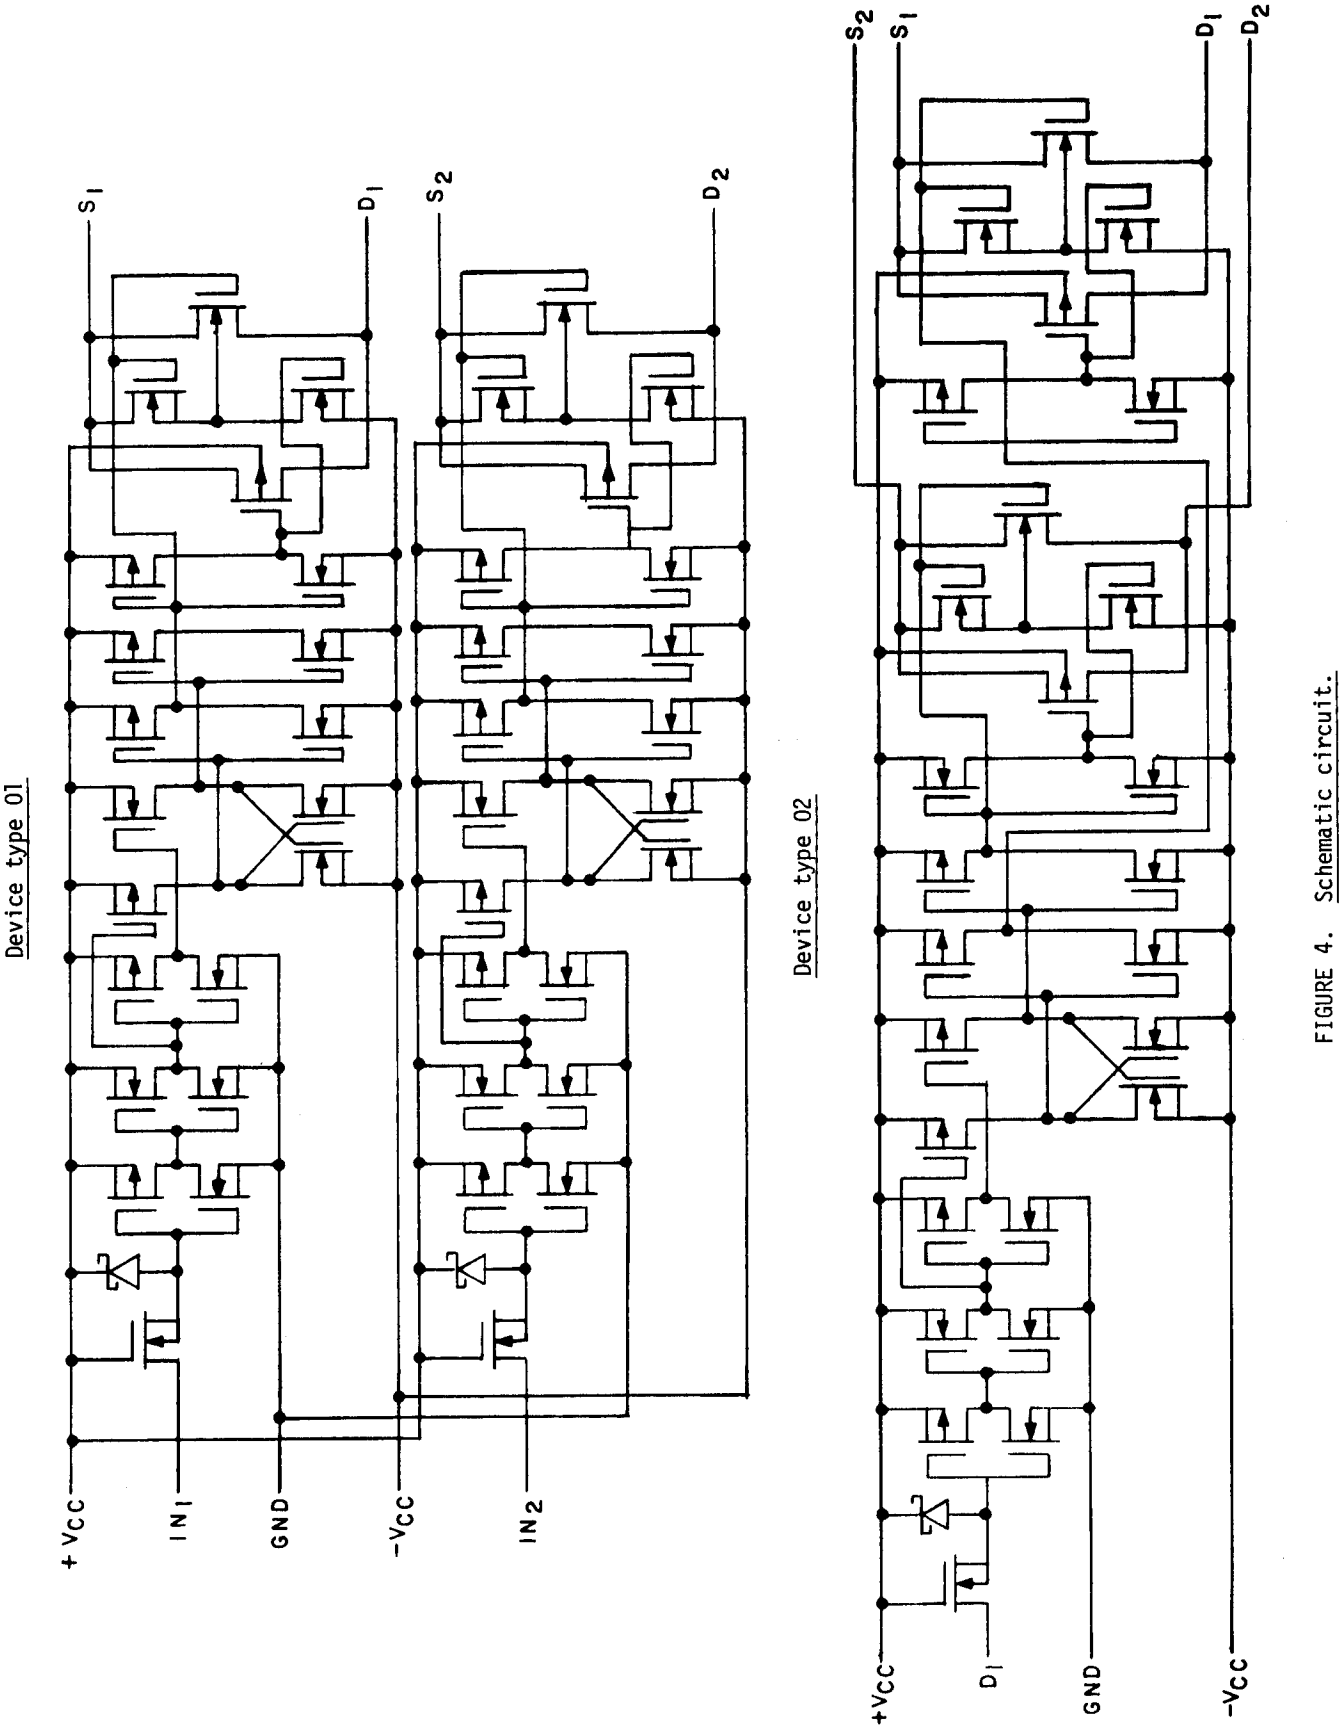


FIGURE 4. Schematic circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

Device type 03

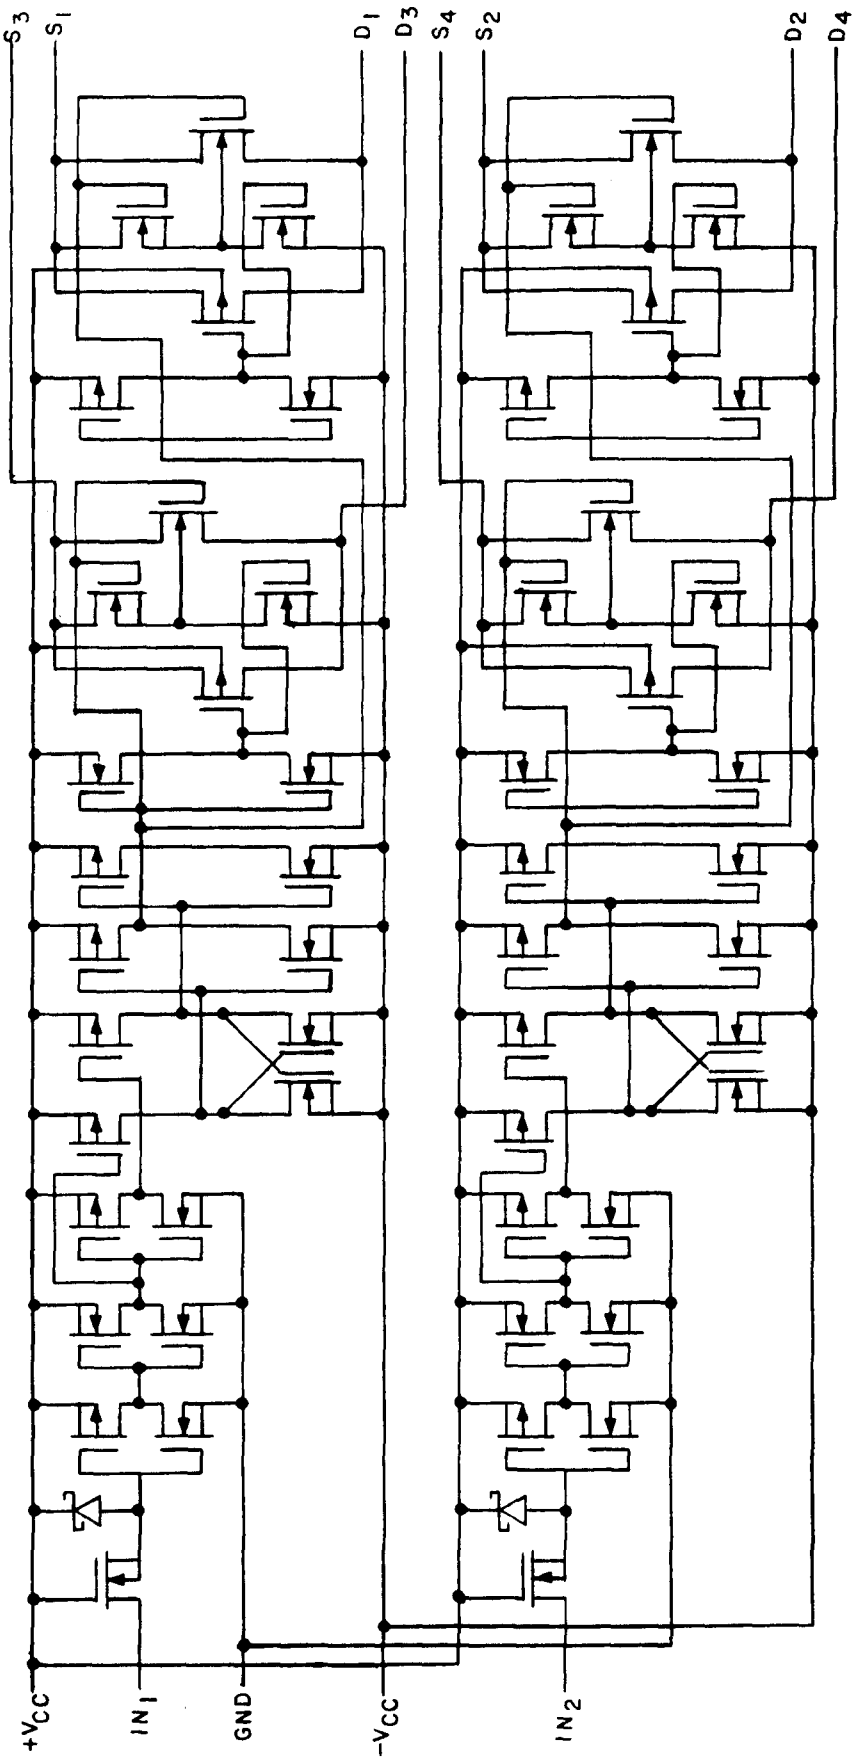


FIGURE 4. Schematic circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

Device type 04


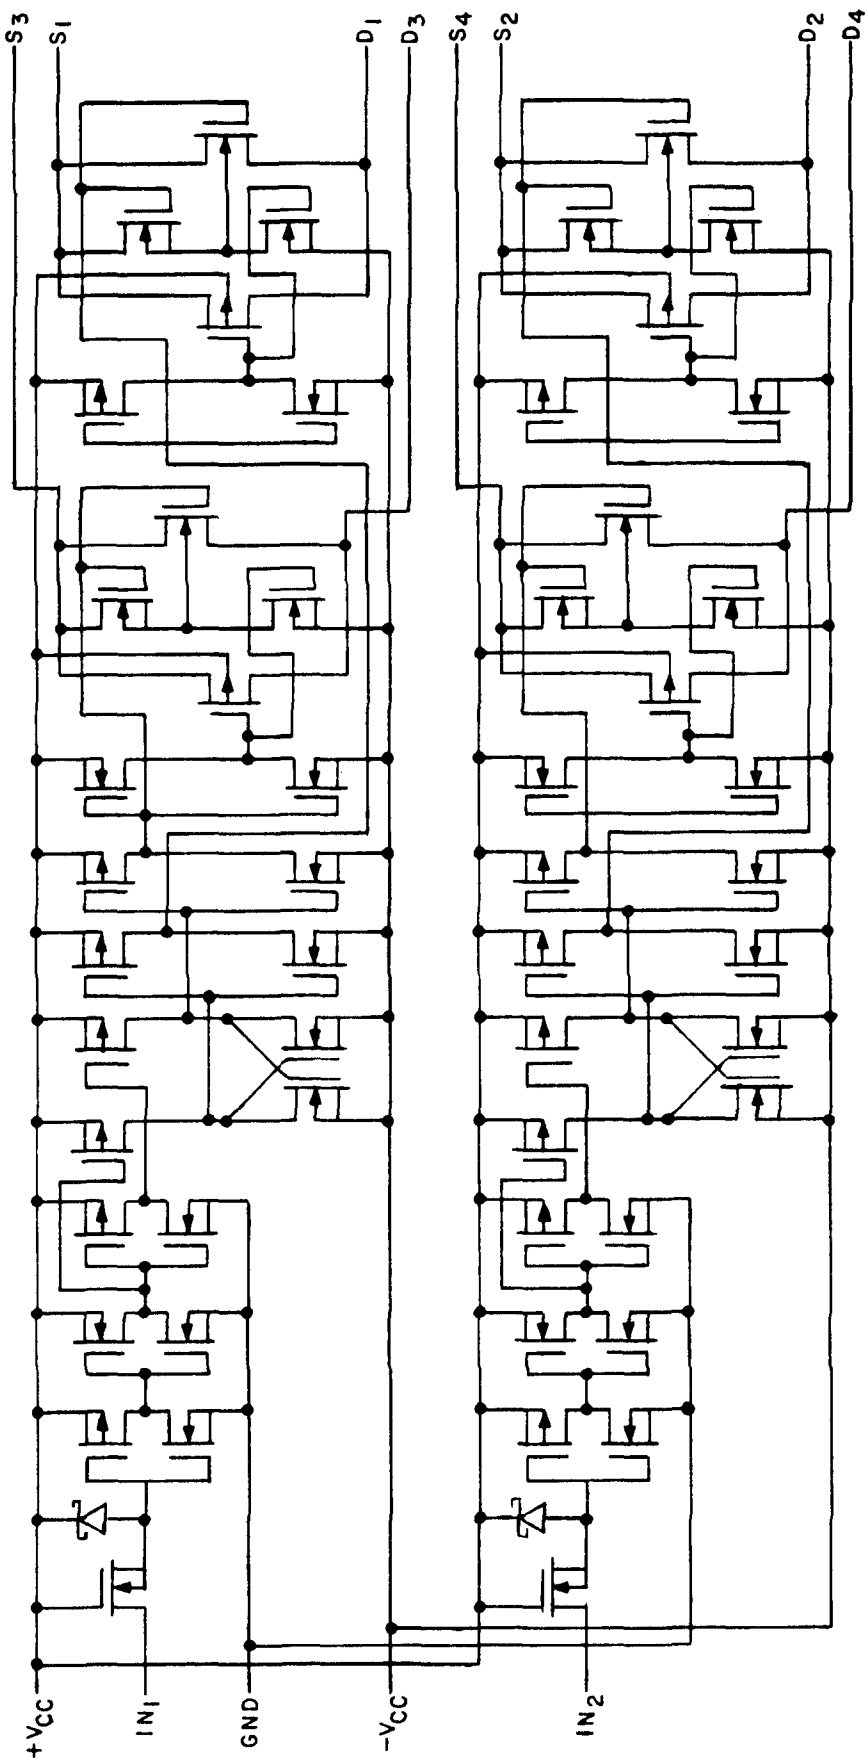


FIGURE 4. Schematic circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

Device type 05

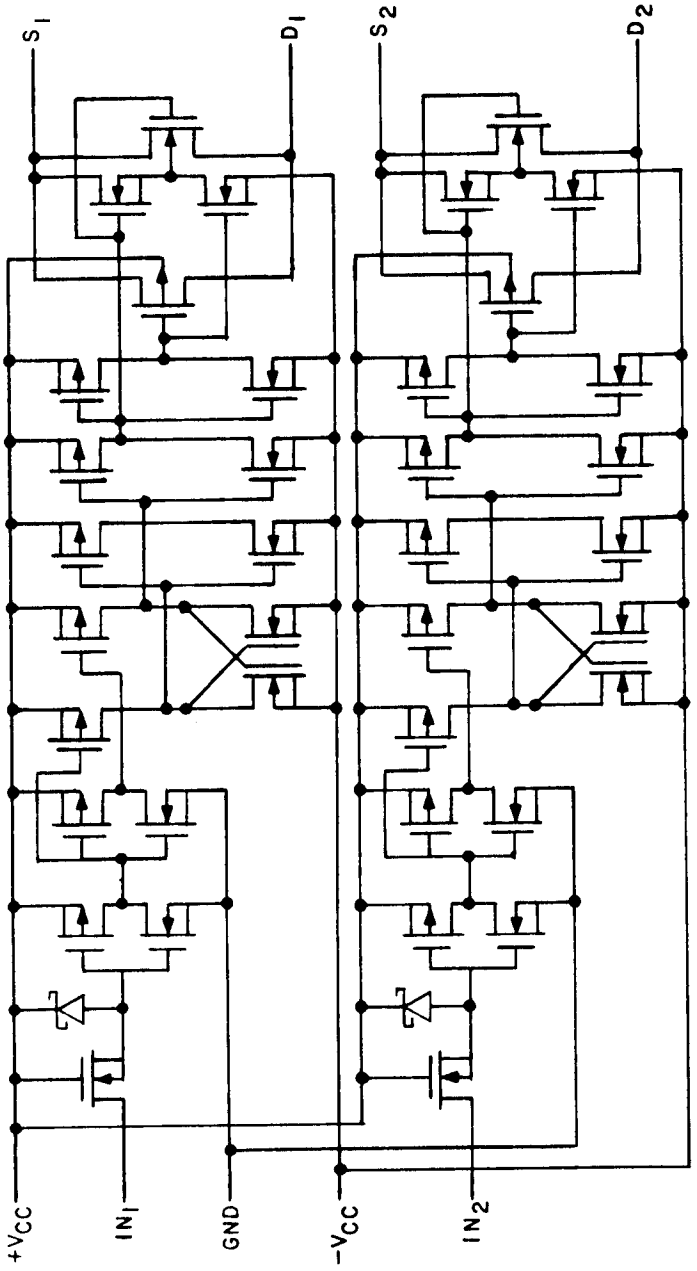

Device type 06

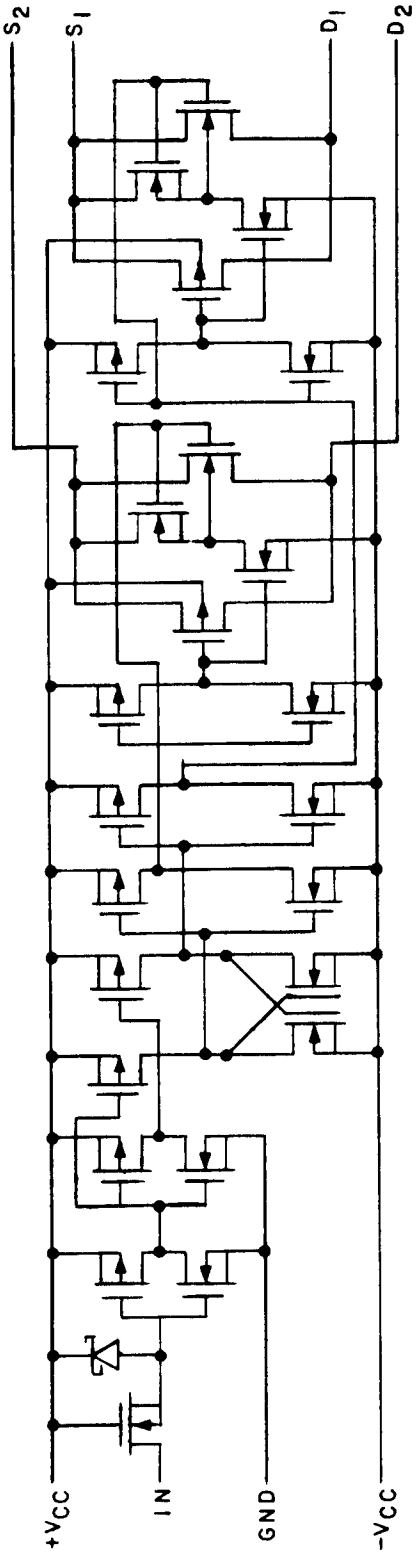


FIGURE 4. Schematic circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

Device type 07

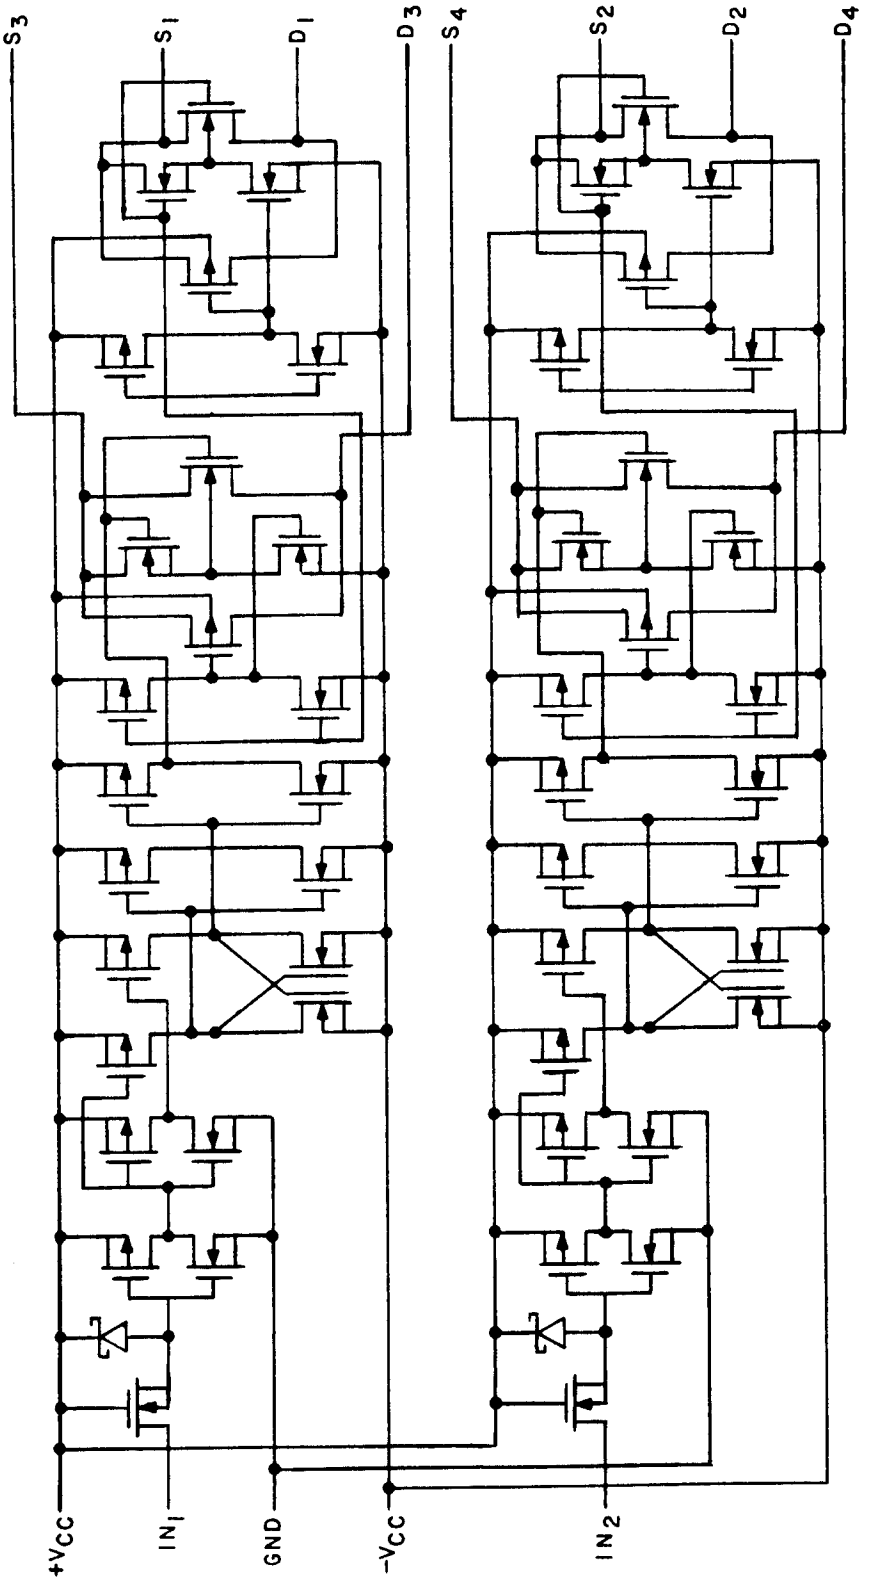


FIGURE 4. Schematic circuit - Continued.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

Device type 08


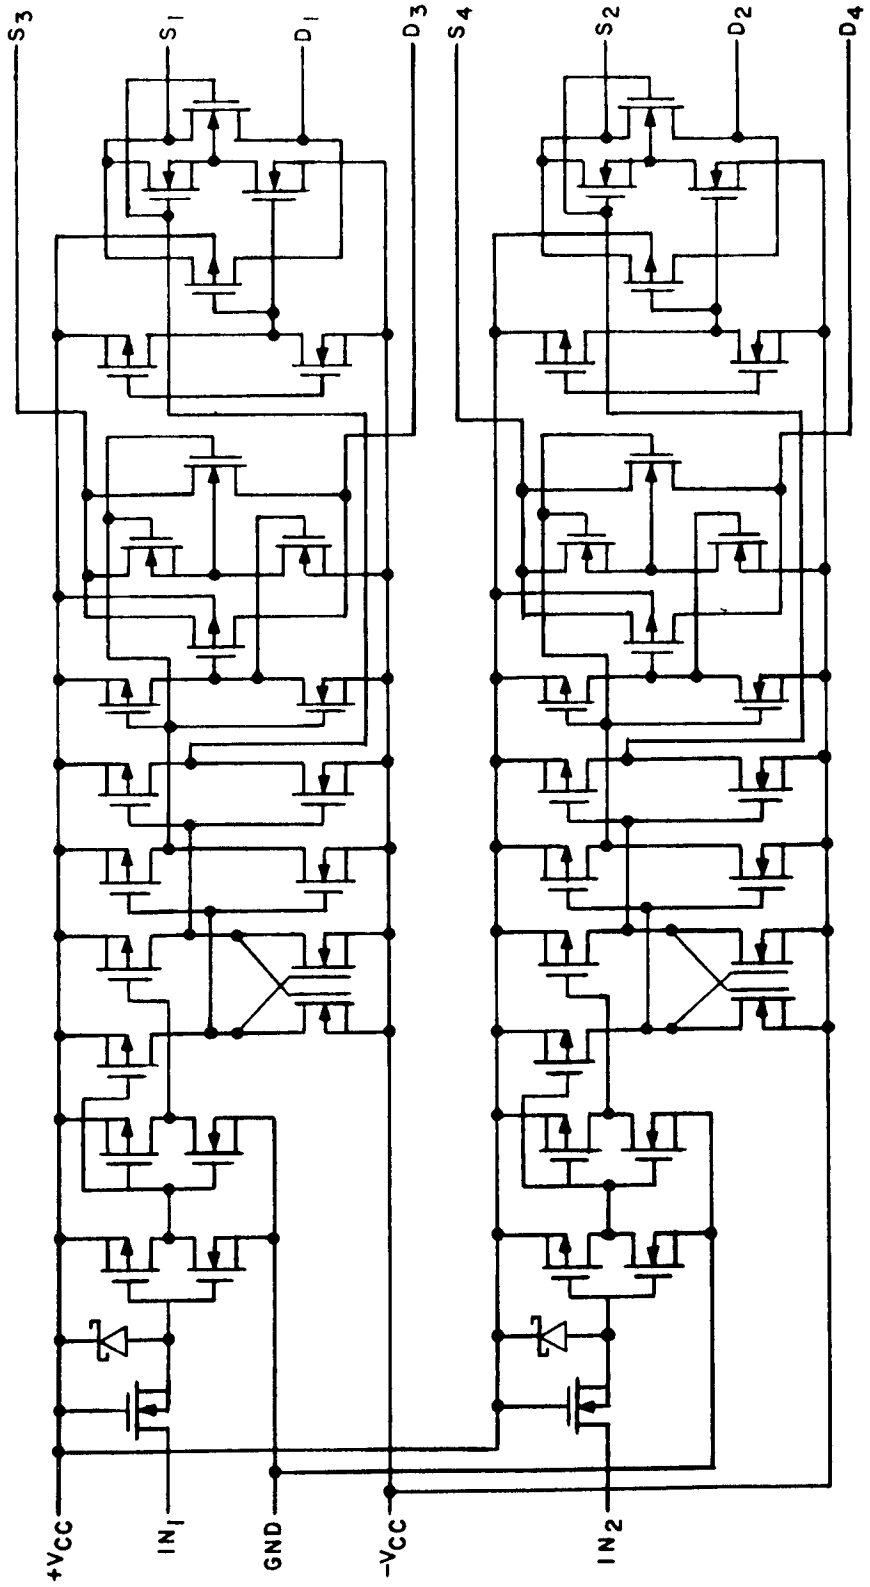


FIGURE 4. Schematic circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

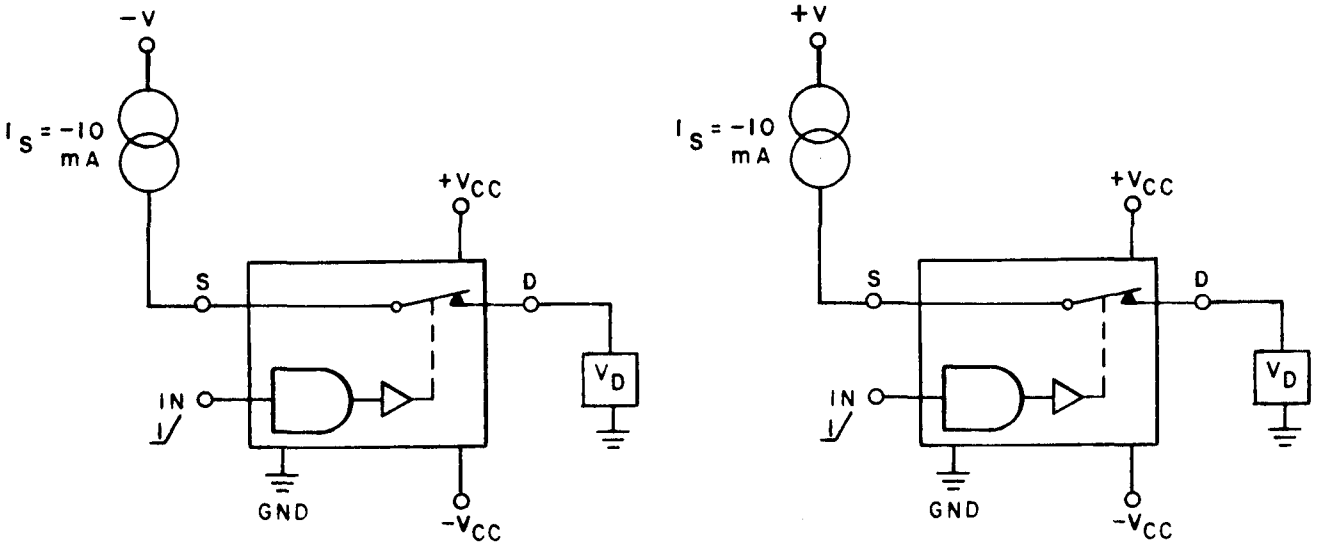


1/ V_{IN} from table I

$$R_{DS} = \frac{V_S - V_D}{-10\ mA}$$

1/ V_{IN} from table I

$$R_{DS} = \frac{V_S - V_D}{10\ mA}$$

FIGURE 5. R_{DS} test circuits.

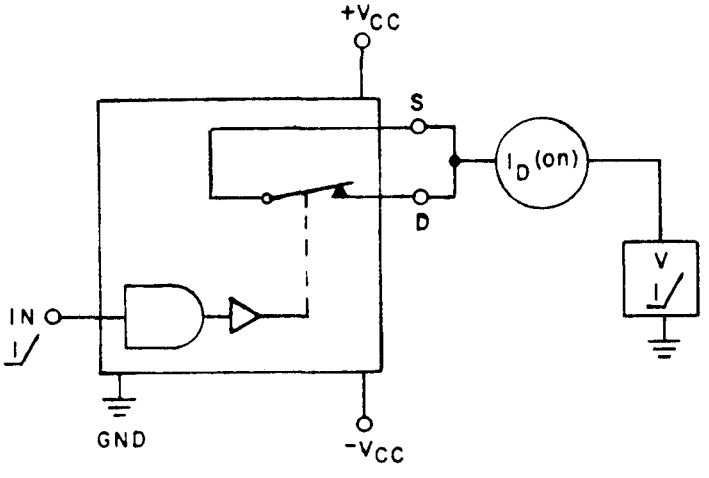

1/ Conditions are from table I.

FIGURE 6. $I_{D(ON)}$ test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.



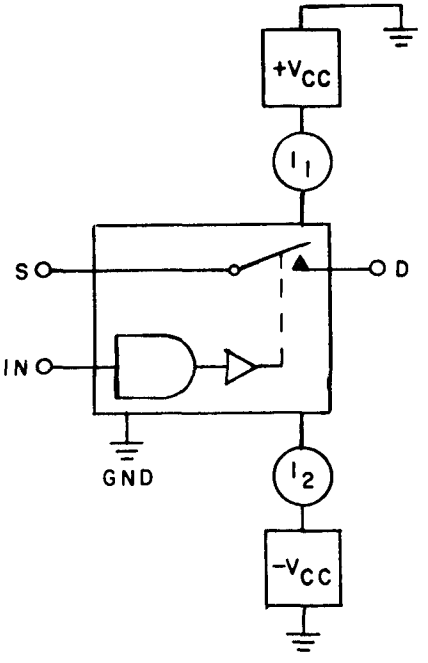


FIGURE 7. I^+, I^- test circuit.

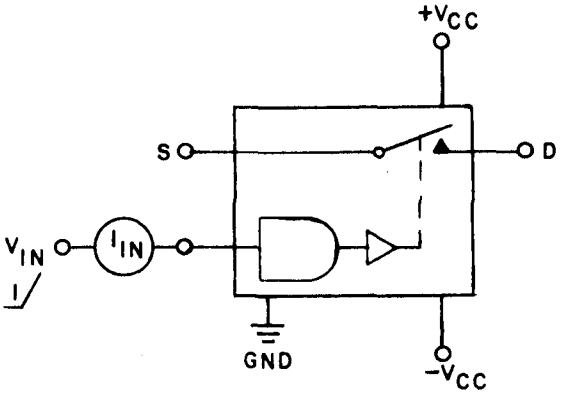


1/ Test conditions are from table I.

FIGURE 8. I_{IL}, I_{IH} test circuit.

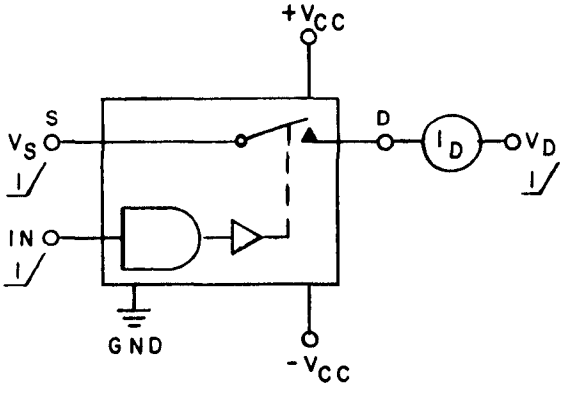

1/ Test conditions are from table I.


FIGURE 9. $I_{D(OFF)}$ test circuit.

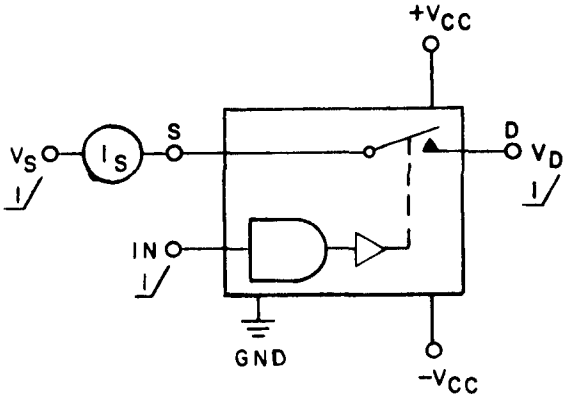

1/ Test conditions are from table I.

FIGURE 10. $I_{S(OFF)}$ test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

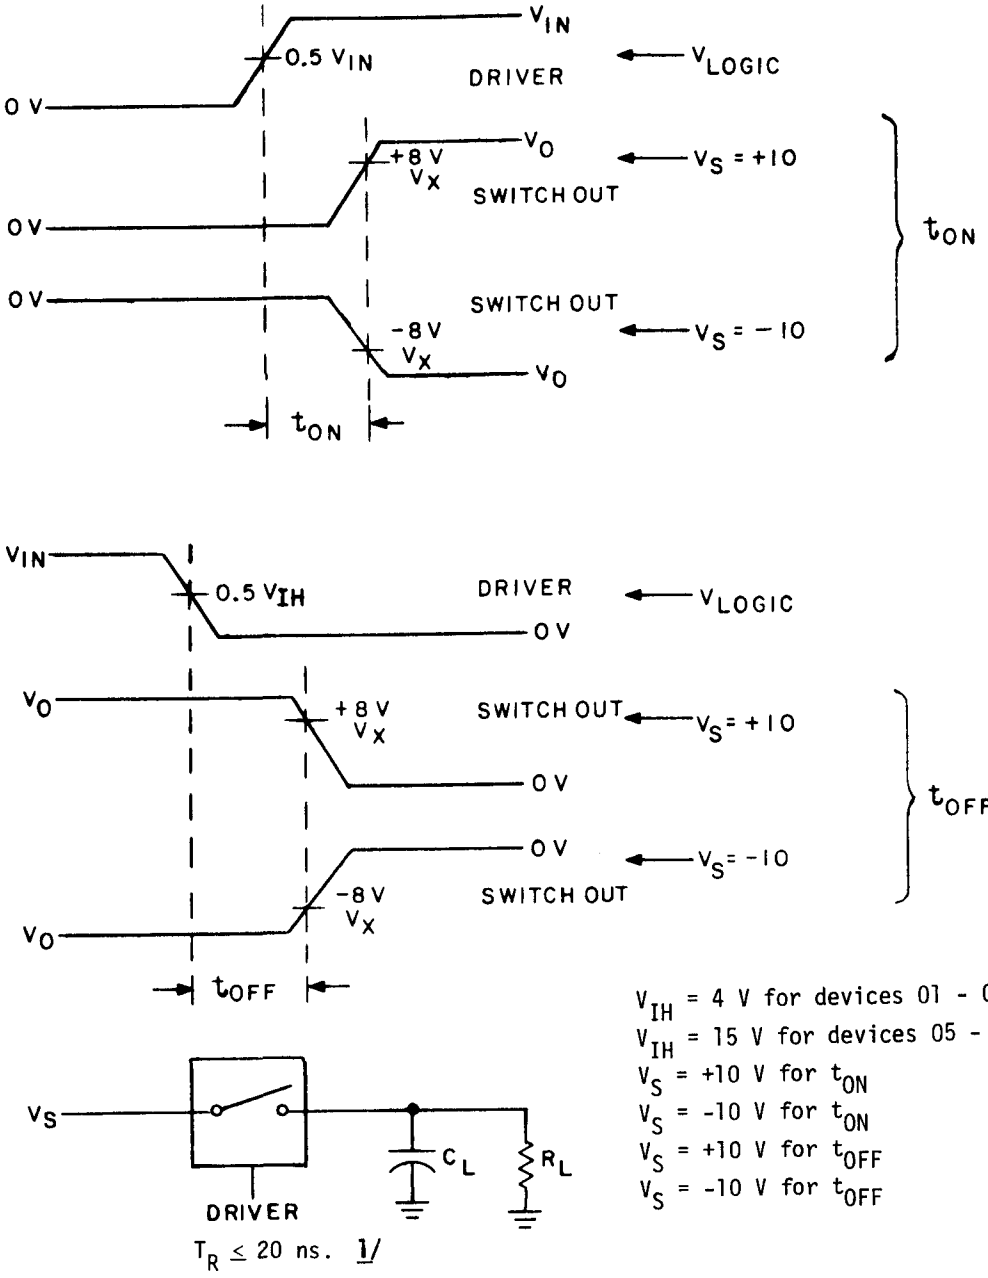

V_{IH} = 4 V for devices 01 - 04.
V_{IH} = 15 V for devices 05 - 08.
V_S = +10 V for t_{ON}
V_S = -10 V for t_{ON}
V_S = +10 V for t_{OFF}
V_S = -10 V for t_{OFF}

$T_R \leq 20$ ns. 1/

R_L = 1 kΩ ±5%.
C_L = 100 pf ±5% (includes test and jig capacitance).

FIGURE 11. Input-output waveforms for time delay tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

NOTES:
1. The logic driver shall have the following characteristics:

   a. V_{LOGIC} = 0 V to +4 V for parts 01 - 04.
      V_{LOGIC} = 0 V to +15 V for parts 05 - 08.
   b. Rise time (0.4 V to 3.6 V) $\leq$ 10 ns
      Fall time (3.6 V to 0.4 V) $\leq$ 10 ns } Part types 01 - 04

      Rise time (1.5 V to 13.5 V) $\leq$ 20 ns
      Fall time (13.5 V to 1.5 V) $\leq$ 20 ns } Part types 05 - 08

2. See 3.4.1 for appropriate switching conditions.
3. V_{SOURCE} (V_S) = +10 V and -10 V for t_{ON}.
   V_{SOURCE} (V_S) = +10 V and -10 V for t_{OFF}.
4. V_X = +8 V for +10 V condition in note 3 above.
   V_X = -8 V for -10 V condition in note 3 above.

FIGURE 11. Input-output waveforms for time delay tests - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

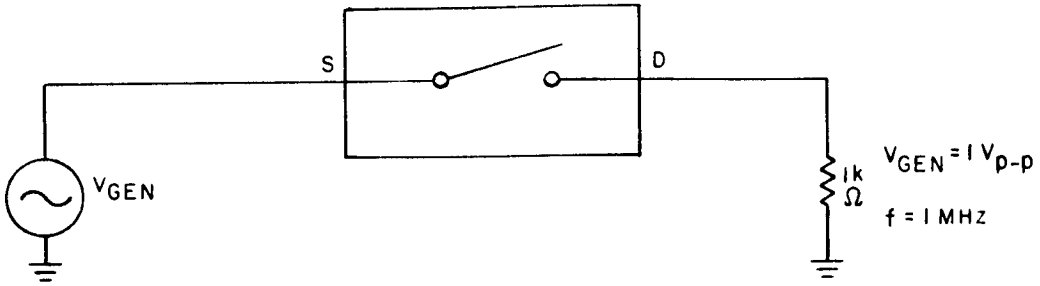


FIGURE 12. Isolation test circuit.

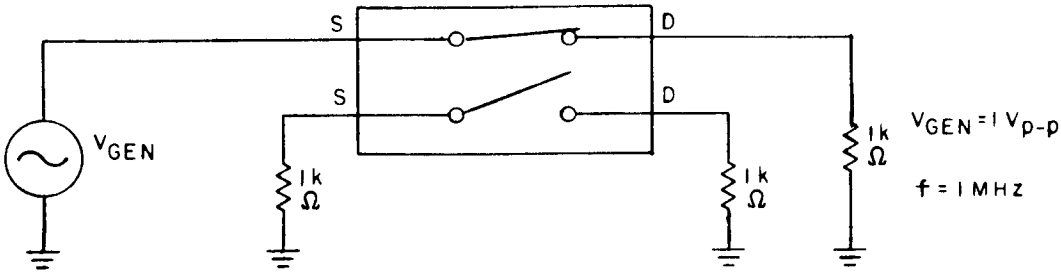


FIGURE 13. Crosstalk test circuit.


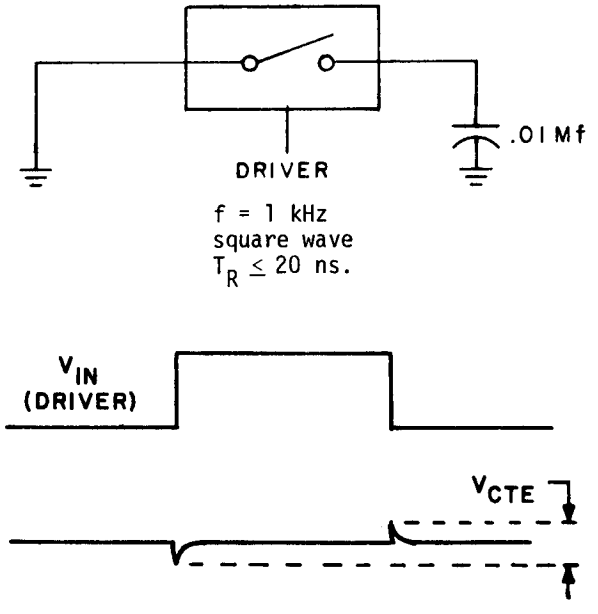


FIGURE 14. Charge transfer error test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

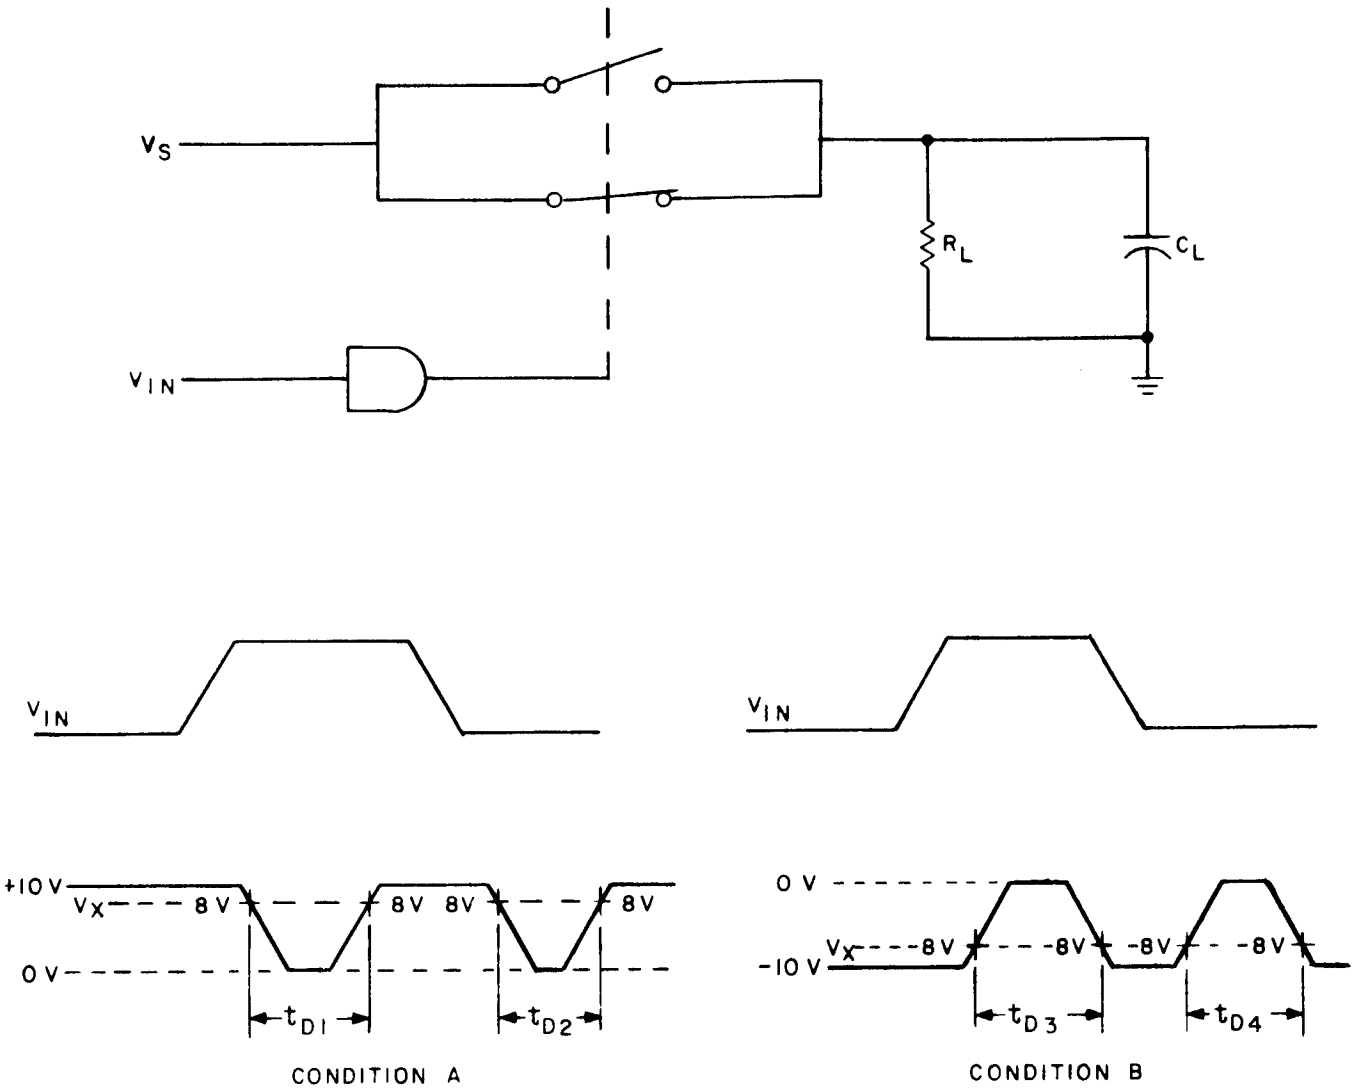

NOTES:
1. R_L = 1 kΩ ±5%, C_L = 100 pf ±5%.
2. T_{D1}, T_{D2}, T_{D3} and T_{D4} shall all be measured. These measurements shall apply only to device types 02, 04, 06, and 08. See 3.4.1 for switch conditions.
3. V_{SOURCE} (V_S) = +10 V for condition A (all part types).
   V_{SOURCE} (V_S) = -10 V for condition B (all part types).
4. V_X = +8 V for condition A (all part types).
   V_X = -8 V for condition B (all part types).
5. The logic driver shall have the following characteristics:


   a. V_{LOGIC} = 0 V to +4 V for part types 01 - 04.
      V_{LOGIC} = 0 V to +15 V for part types 05 - 08.
   b. Rise time (0.4 V to 3.6 V) ≤ 10 ns
      Fall time (3.6 V to 0.4 V) ≤ 10 ns } Part types 01 - 04

      Rise time (1.5 V to 13.5 V) ≤ 20 ns
      Fall time (13.5 V to 1.5 V) ≤ 20 ns } Part types 05 - 08


FIGURE 15. Break-before-make test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

Device types 01 and 05

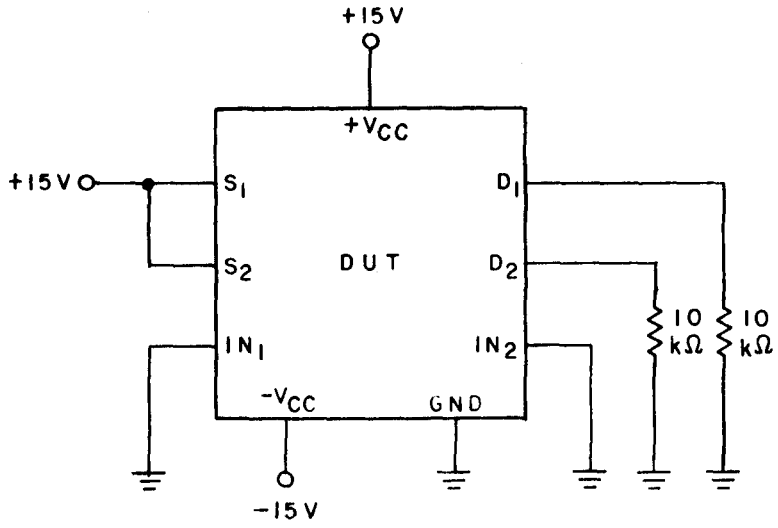

Device types 02 and 06

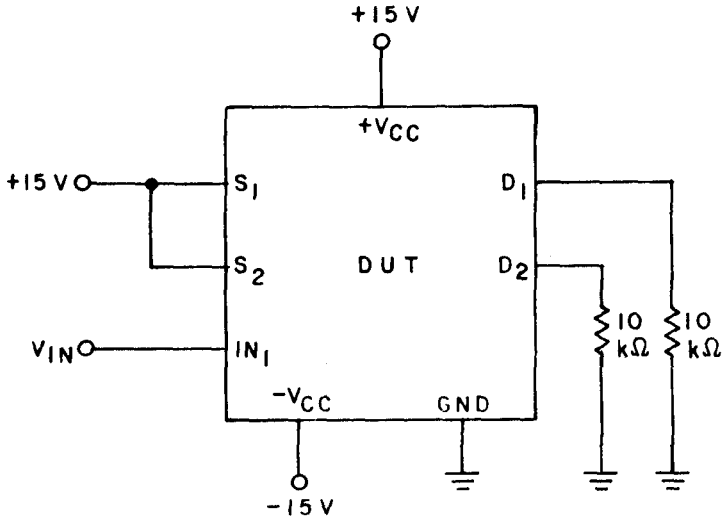


See 4.3b for
V_{IN} = 0 V
V_{IN} = 15 V


FIGURE 16. Test circuits, burn-in and operating life test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

Device types 03 and 07

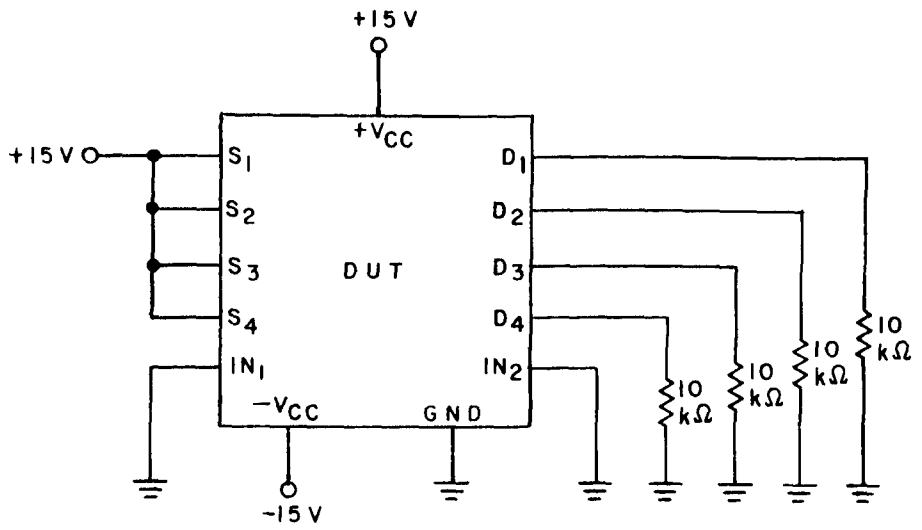

Device types 04 and 08

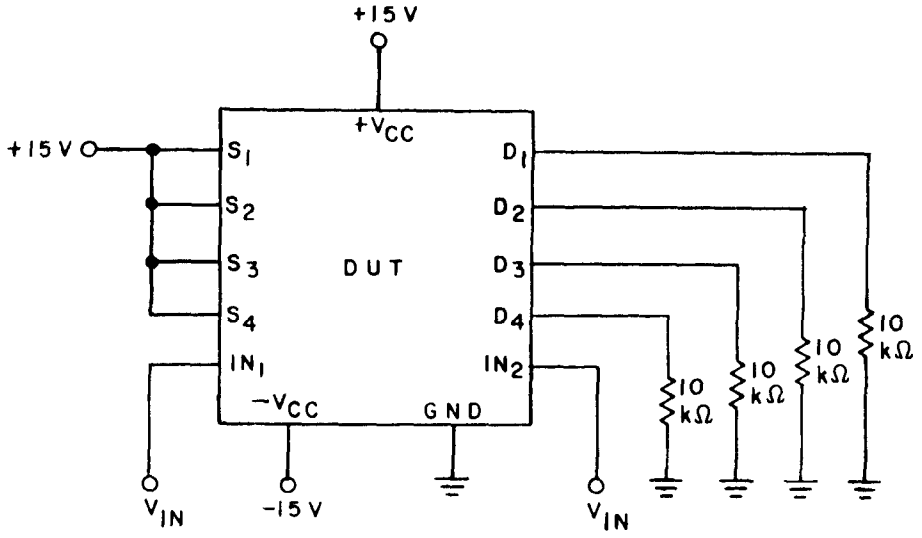


See 4.3b for
V_{IN} = 0 V
V_{IN} = 15 V

FIGURE 16. Test circuit, burn-in and operating life test - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

Device types 01 and 05

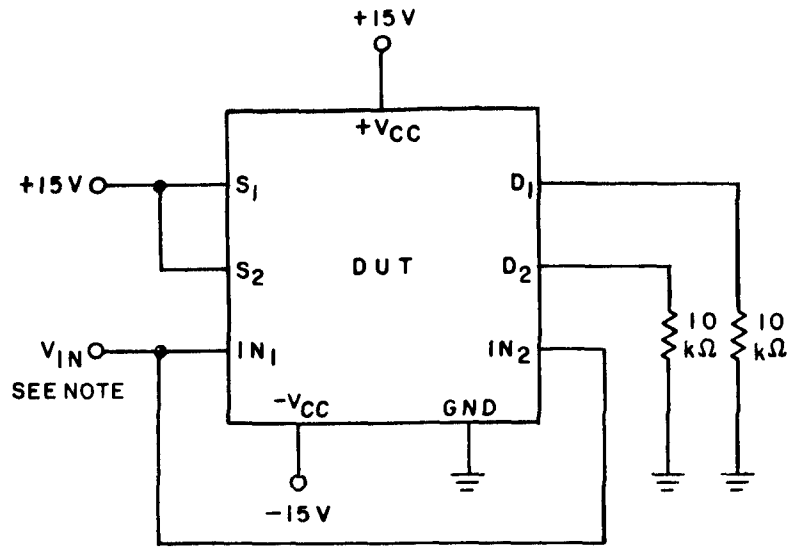

Device types 02 and 06


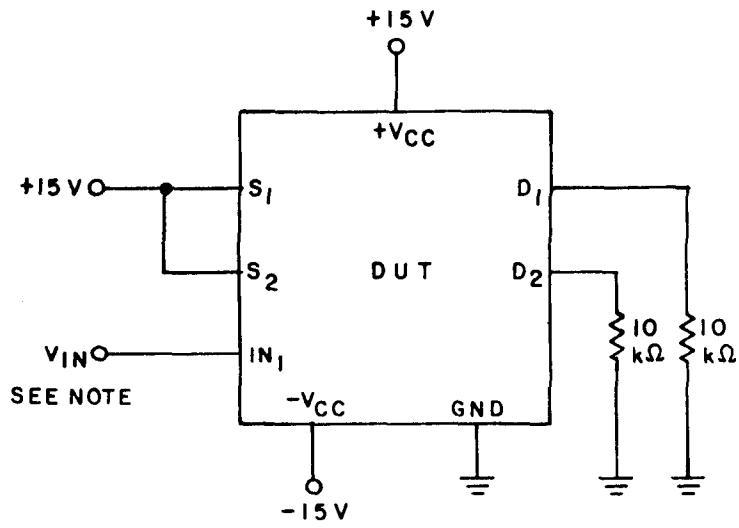


FIGURE 17. Test circuits, burn-in, dynamic and operating life test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

Device types 03, 04, 07, and 08

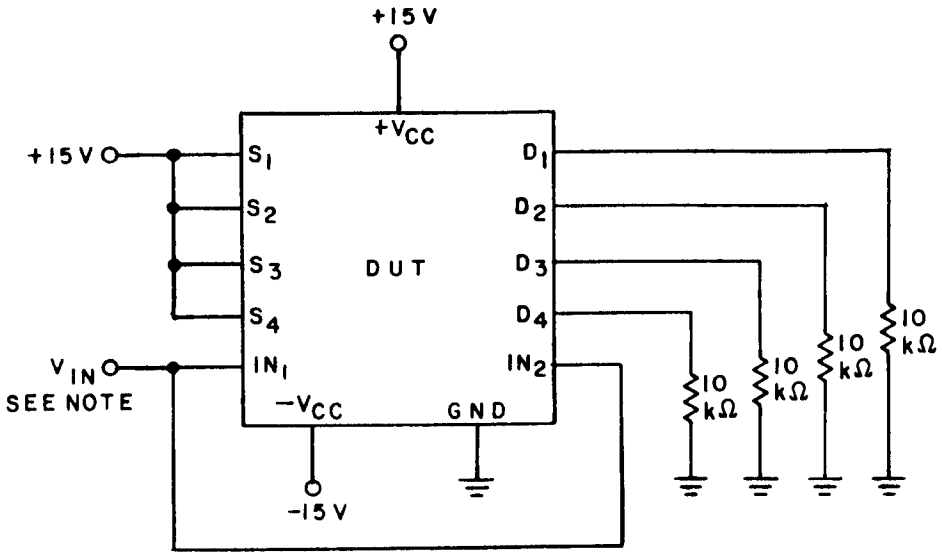


NOTE: The pulse generator shall have the following characteristics:

a. V_{GEN} = 0 V to +15 V.
b. Rise time ≤ 20 ns.
c. Fall time ≤ 20 ns.
d. PRR = 1 kHz at 50% duty cycle.

FIGURE 17. Test circuits, burn-in, dynamic and operating life test - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

Device types 01 and 05

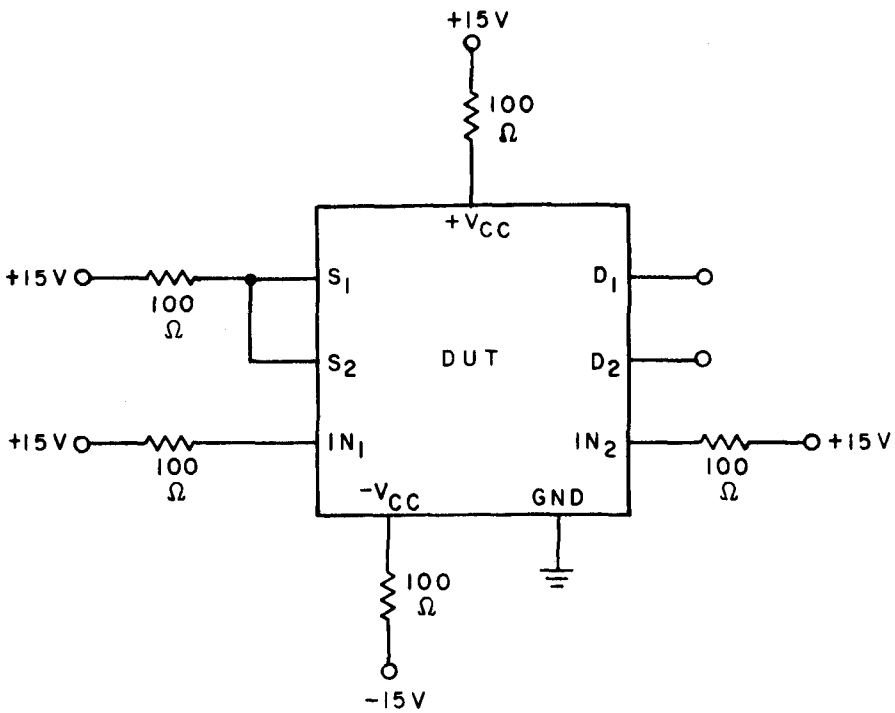

Device types 02 and 06

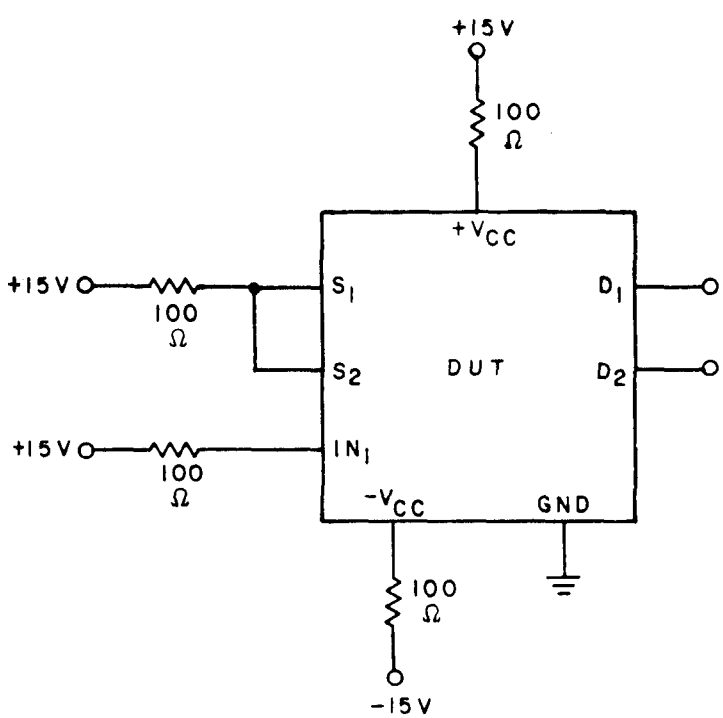


FIGURE 18. Test circuits, accelerated burn-in and life test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

Device types 03, 04, 07, and 08

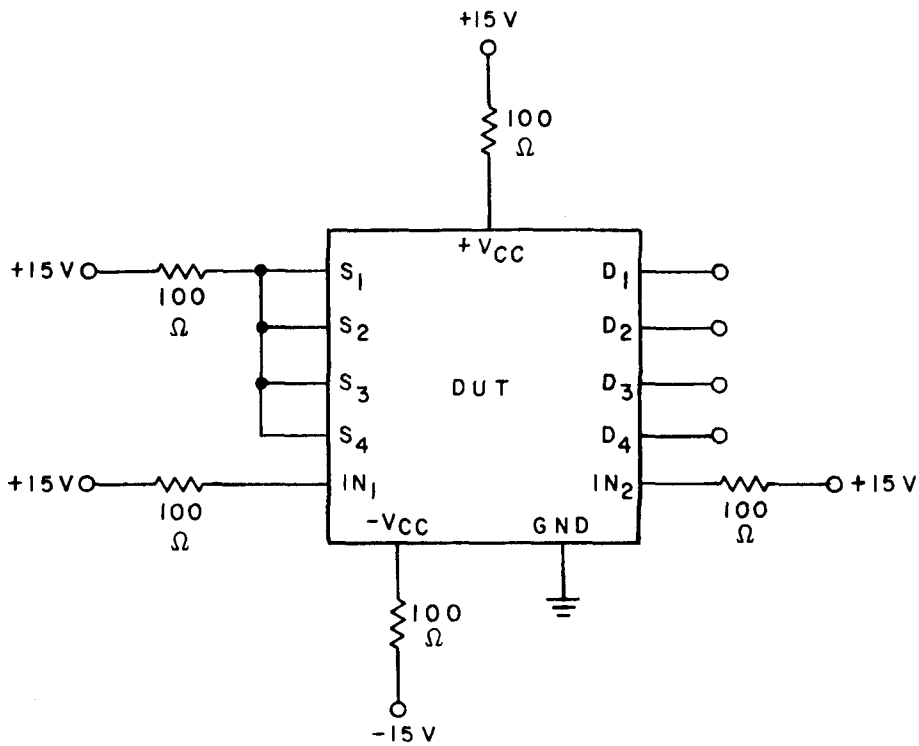


FIGURE 18. Test circuits, accelerated burn-in and life test - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

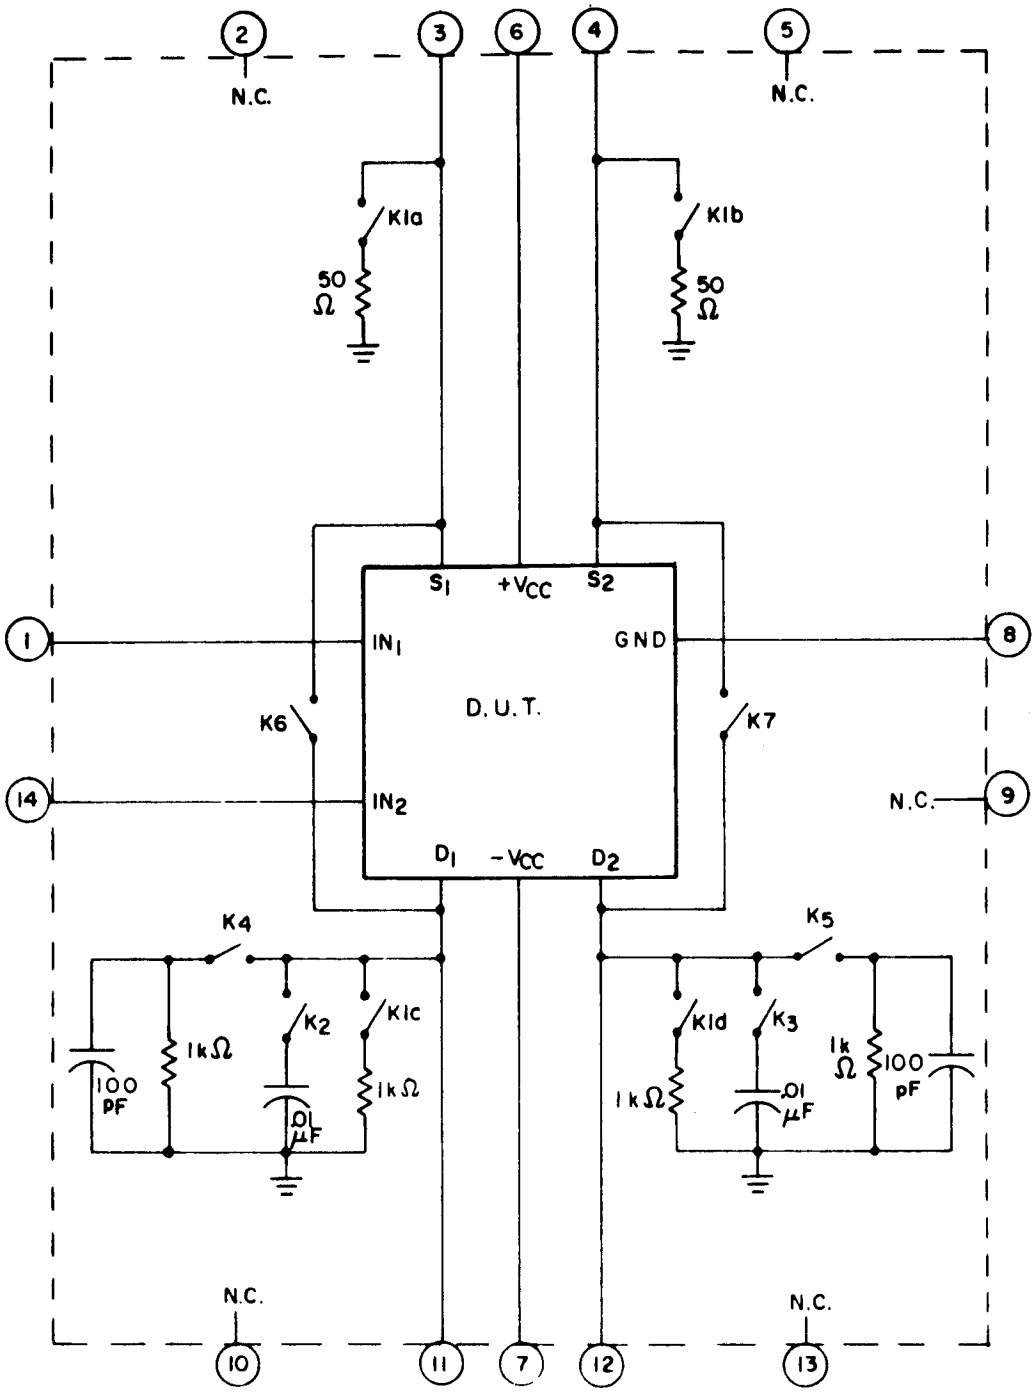


FIGURE 19. Test circuit (static and dynamic tests) for device types 01 and 05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

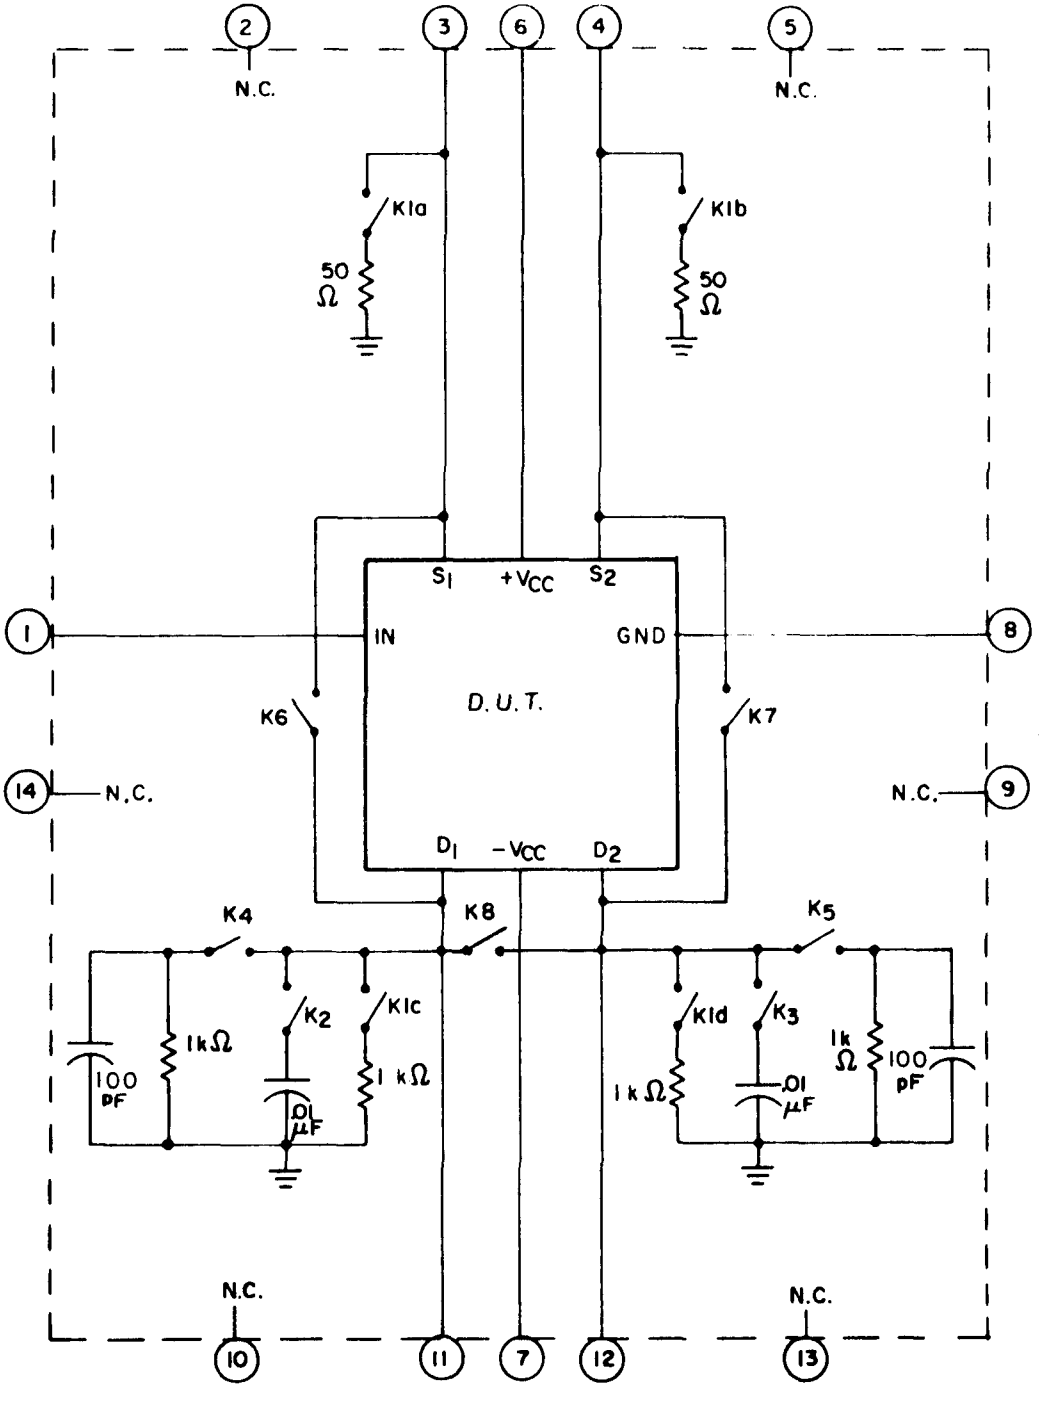


FIGURE 20. Test circuit (static and dynamic tests) for device types 02 and 06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

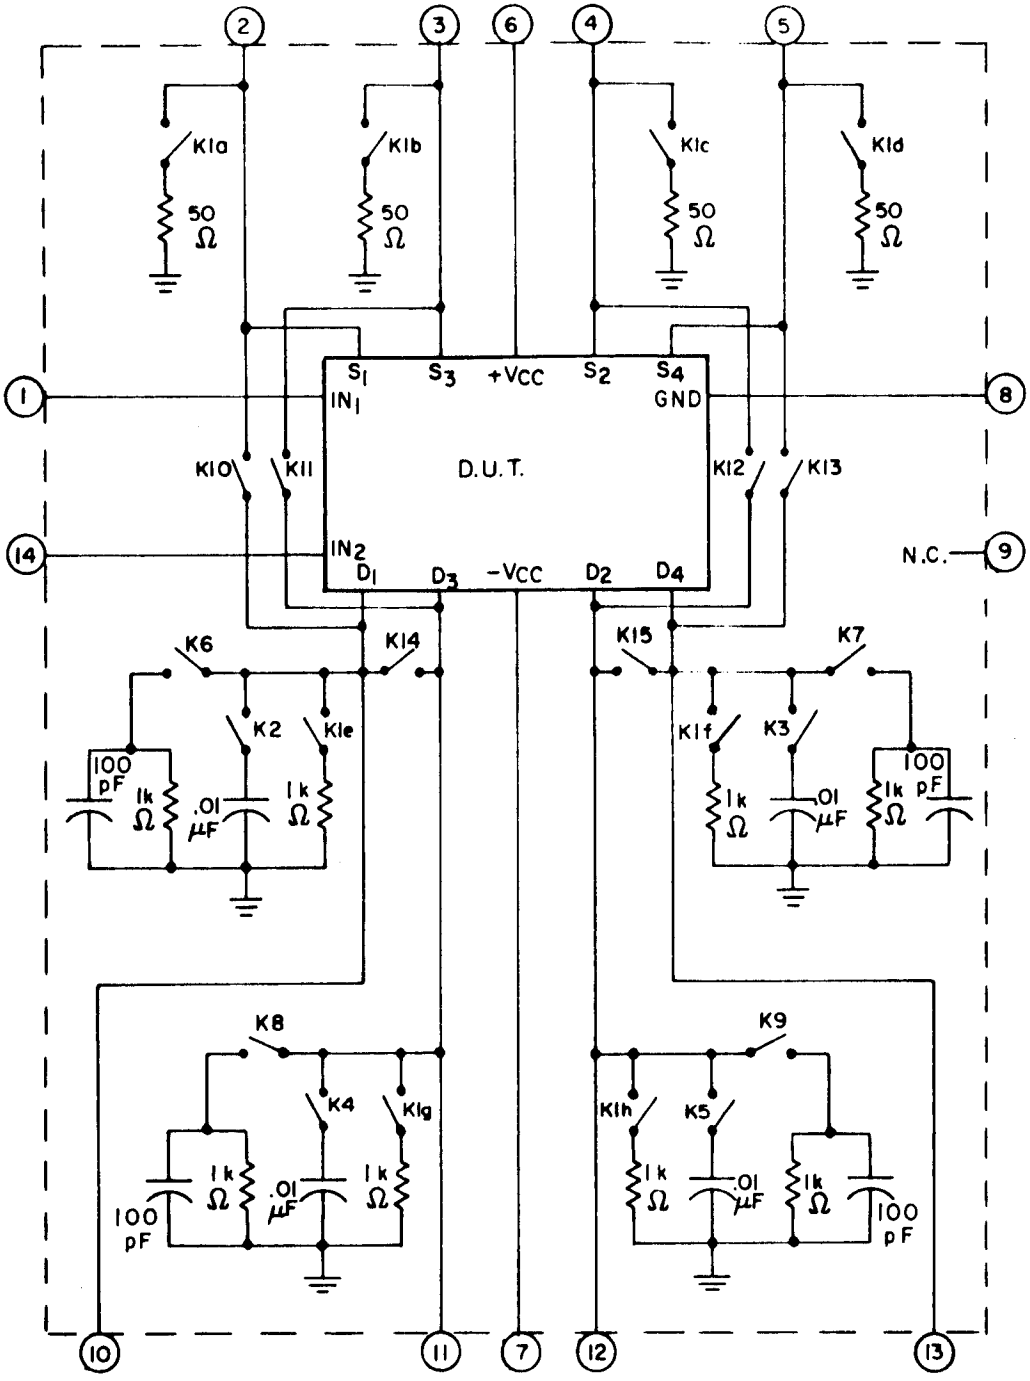


FIGURE 21. Test circuit (static and dynamic tests) for device types 03, 04, 07, and 08.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	GND	NC	NC	D_1	D_2	NC	IN_2					
1 T_A = 25°C	R_{DS}	1	4.0 V		10 mA			15.0 V	-15.0 V	GND			-10.0 V				None	3		-9.5	V 2/
		2				10 mA								-10.0 V		4.0 V		4		-9.5	
		3	4.0 V		-10 mA								10.0 V					3	9.5		
		4				-10 mA								10.0 V		4.0 V		4	9.5		
		5	4.0 V		10 mA			10.0 V	-10.0 V				-7.5 V					3		-6.8	
		6				10 mA								-7.5 V		4.0 V		4		-6.8	
		7	4.0 V		-10 mA								7.5 V					3	6.8		
		8				-10 mA								7.5 V		4.0 V		4	6.8		
	$I_{D(ON)}$	9	4.0 V		14.0 V			15.0 V	-15.0 V				14.0 V				K6	3	-1	1	nA
		10				14.0 V								14.0 V		4.0 V	K7	4	-1	1	
		11	4.0 V		-14.0 V								-14.0 V				K6	3	-2	2	
		12				-14.0 V								-14.0 V		4.0 V	K7	4	-2	2	
	$I_{D(OFF)}$	13	0.8 V		-14.0 V								14.0 V				None	11	-1	1	
		14				-14.0 V								14.0 V		0.8 V		12			
		15	0.8 V		14.0 V								-14.0 V					11			
		16				14.0 V								-14.0 V		0.8 V		12			
	$I_{S(OFF)}$	17	0.8 V		-14.0 V								14.0 V					3			
		18				-14.0 V								14.0 V		0.8 V		4			
		19	0.8 V		14.0 V								-14.0 V					3			
		20				14.0 V								-14.0 V		0.8 V		4			
	I_{IL}	21	0.0 V															1			µA
	I_{IL}	22														0.0 V		14			
	I_{IH}	23	5.0 V															1			
		24														5.0 V		14			
		25	15.0 V															1		1	
		26														15.0 V		14		1	
	$+I_{CC}$	27	0.8 V													0.8 V		6		0.01	mA
	$+I_{CC}$	28	4.0 V													4.0 V		6		1.0	
	$-I_{CC}$	29	0.8 V													0.8 V		7	-0.01		
	$-I_{CC}$	30	4.0 V													4.0 V		7	-0.01		
2 T_A = 125°C	R_{DS}	31	4.0 V		10 mA			15.0 V	-15.0 V				-10.0 V					3		-9.25	V 2/
		32				10 mA								-10.0 V		4.0 V		4		-9.25	
		33	4.0 V		-10 mA								10.0 V					3	9.25		
		34				-10 mA								10.0 V		4.0 V		4	9.25		
		35	4.0 V		10 mA			10.0 V	-10.0 V				-7.5 V					3		-6.5	
		36				10 mA								-7.5 V		4.0 V		4		-6.5	
		37	4.0 V		-10 mA								7.5 V					3	6.5		
		38				-10 mA								7.5 V		4.0 V		4	6.5		
	$I_{D(ON)}$	39	4.0 V		14.0 V			15.0 V	-15.0 V				14.0 V				K6	3	-100	100	nA
		40				14.0 V								14.0 V		4.0 V	K7	4	-100	100	
		41	4.0 V		-14.0 V								-14.0 V				K6	3	-200	200	
		42				-14.0 V								-14.0 V		4.0 V	K7	4	-200	200	
	$I_{D(OFF)}$	43	0.8 V		-14.0 V								14.0 V				None	11	-100	100	
		44				-14.0 V								14.0 V		0.8 V		12			
		45	0.8 V		14.0 V								-14.0 V					11			
		46				14.0 V								-14.0 V		0.8 V		12			
	$I_{S(OFF)}$	47	0.8 V		-14.0 V								14.0 V					3			
		48				-14.0 V								14.0 V		0.8 V		4			
		49	0.8 V		14.0 V								-14.0 V					3			
		50				14.0 V								-14.0 V		0.8 V		4			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	GND	NC	NC	D_1	D_2	NC	IN_2					
2	I_{IL}	51	0.0 V					15.0 V	-15.0 V	GND							None	1	-1		µA
T_A = 125°C	I_{IL}	52														0.0 V		14	-1		
	I_{IH}	53	5.0 V															1	-1		
		54														5.0 V		14	-1		
		55	15.0 V															1		1	
		56														15.0 V		14		1	
	$+I_{CC}$	57	0.8 V													0.8 V		6		0.1	mA
		58	4.0 V													4.0 V		6		1.0	
	$-I_{CC}$	59	0.8 V													0.8 V		7	-0.1		
		60	4.0 V													4.0 V		7	-0.1		
3	R_{DS}	61	4.0 V		10 mA								-10.0 V					3		-9.5	V 2/
T_A = -55°C		62				10 mA								-10.0 V		4.0 V		4		-9.5	
		63	4.0 V		-10 mA								10.0 V					3	9.5		
		64				-10 mA								10.0 V		4.0 V		4	9.5		
		65	4.0 V		10 mA			10.0 V	-10.0 V				-7.5 V					3		-6.8	
		66				10 mA								-7.5 V		4.0 V		4		-6.8	
		67	4.0 V		-10 mA								7.5 V					3	6.8		
		68				-10 mA								7.5 V		4.0 V		4	6.8		
	$I_{D(ON)}$	69	4.0 V		14.0 V			15.0 V	-15.0 V				14.0 V				K6	3	-100	100	nA
		70				14.0 V								14.0 V		4.0 V	K7	4	-100	100	
		71	4.0 V		-14.0 V								-14.0 V				K6	3	-200	200	
		72				-14.0 V								-14.0 V		4.0 V	K7	4	-200	200	
	$I_{D(OFF)}$	73	0.8 V		-14.0 V								14.0 V				None	11	-100	100	
		74				-14.0 V								14.0 V		0.8 V		12			
		75	0.8 V		14.0 V								-14.0 V					11			
		76				14.0 V								-14.0 V		0.8 V		12			
	$I_{S(OFF)}$	77	0.8 V		-14.0 V								14.0 V					3			
		78				-14.0 V								14.0 V		0.8 V		4			
		79	0.8 V		14.0 V								-14.0 V					3			
		80				14.0 V								-14.0 V		0.8 V		4			
	I_{IL}	81	0.0 V															1	-1		µA
		82														0.0 V		14	-1		
	I_{IH}	83	5.0 V															1	-1		
		84														5.0 V		14	-1		
		85	15.0 V															1		1	
		86														15.0 V		14		1	
	$+I_{CC}$	87	0.8 V													0.8 V		6		0.01	mA
		88	4.0 V													4.0 V		6		2.0	
	$-I_{CC}$	89	0.8 V													0.8 V		7	-0.01		
		90	4.0 V													4.0 V		7	-0.01		
4	V_{CTE}	91	IN 3/		GND												K2	11		15	mV
T_A = 25°C		92				GND										IN 3/	K3	12		15	mV
7	V_{CT}	93	0.8 V		IN 4/												K1	12		3.16	mV_{p-p}
T_A = 25°C			$dB_{CT} = -20 \log (V_{OUT}/V_{IN})$													2.0 V			50		dB
	V_{ISO}	94	4.0 V		IN 4/			15.0 V	-15.0 V	GND							K1	11		3.16	mV_{p-p}
		95				IN 4/		15.0 V	-15.0 V	GND						4.0 V	K1	12		3.16	mV_{p-p}
			$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$																50		dB

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	GND	NC	NC	D_1	D_2	NC	IN_2					
9 T_A = 25°C	t_{ON}	96	IN		IN			15.0 V	-15.0 V	GND			OUT				K4	1 to 11		300	ns
		97				IN								OUT		IN	K5	14 to 12		300	
	t_{OFF}	98	IN		IN								OUT				K4	1 to 11		250	
		99				IN								OUT		IN	K5	14 to 12		250	
10 T_A = 125°C	t_{ON}	100	IN		IN								OUT				K4	1 to 11		360	
		101				IN								OUT		IN	K5	14 to 12		360	
	t_{OFF}	102	IN		IN								OUT				K4	1 to 11		290	
		103				IN								OUT		IN	K5	14 to 12		290	
11 T_A = -55°C	t_{ON}	104	IN		IN								OUT				K4	1 to 11		260	
		105				IN								OUT		IN	K5	14 to 12		260	
	t_{OFF}	106	IN		IN								OUT				K4	1 to 11		230	
		107				IN								OUT		IN	K5	14 to 12		230	
12 T_A = 25°C	C_{C1}	108	0.0 V														None	1		6	pf
		109														0.0 V		14		6	
	C_{C2}	110	15.0 V															1		3.5	
		111														15.0 V		14		3.5	
	C_{IS}	112																3		14	
		113																4		14	
	C_{OS}	114																11		14	
		115																12		14	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	GND	NC	NC	D_1	D_2	NC	NC					
1 T_A = 25°C	R_{DS}	1	0.8 V			10 mA		15.0 V	-15.0 V	GND				-10.0 V			None	4		-9.5	V 2/
		2	4.0 V		10 mA								-10.0 V					3		-9.5	
		3	0.8 V			-10 mA								10.0 V				4	9.5		
		4	4.0 V		-10 mA								10.0 V					3	9.5		
		5	0.8 V			10 mA		10.0 V	-10.0 V					-7.5 V				4		-6.8	
		6	4.0 V		10 mA								-7.5 V					3		-6.8	
		7	0.8 V			-10 mA								7.5 V				4	6.8		
		8	4.0 V		-10 mA								7.5 V					3	6.8		
	$I_{D(ON)}$	9	0.8 V			14.0 V		15.0 V	-15.0 V					14.0 V			K7	4	-1	1	nA
		10	4.0 V		14.0 V								14.0 V				K6	3	-1	1	
		11	0.8 V			-14.0 V								-14.0 V			K7	4	-2	2	
		12	4.0 V		-14.0 V								-14.0 V				K6	3	-2	2	
	$I_{D(OFF)}$	13	0.8 V		-14.0 V									14.0 V			None	11	-1	1	
		14	4.0 V			-14.0 V							14.0 V					12			
		15	0.8 V		14.0 V								-14.0 V					11			
		16	4.0 V			14.0 V							-14.0 V					12			
	$I_{S(OFF)}$	17	0.8 V		-14.0 V									14.0 V				3			
		18	4.0 V			-14.0 V							14.0 V					4			
		19	0.8 V		14.0 V								-14.0 V					3			
		20	4.0 V			14.0 V							-14.0 V					4			
	I_{IL}	21	0.0 V															1	-1		µA
	I_{IH}	22	5.0 V															1	-1		µA
	I_{IH}	23	15.0 V															1		1	µA
	$+I_{CC}$	24	0.8 V															6		0.01	mA
	$+I_{CC}$	25	4.0 V															6		.5	
	$-I_{CC}$	26	0.8 V															7	-0.01		
	$-I_{CC}$	27	4.0 V															7	-0.01		
2 T_A = 125°C	R_{DS}	28	0.8 V			10 mA		15.0 V	-15.0 V					-10.0 V				4		-9.25	V 2/
		29	4.0 V		10 mA								-10.0 V					3		-9.25	
		30	0.8 V			-10 mA								10.0 V				4	9.25		
		31	4.0 V		-10 mA								10.0 V					3	9.25		
		32	0.8 V			10 mA		10.0 V	-10.0 V					-7.5 V				4		-6.5	
		33	4.0 V		10 mA								-7.5 V					3		-6.5	
		34	0.8 V			-10 mA								7.5 V				4	6.5		
		35	4.0 V		-10 mA								7.5 V					3	6.5		
	$I_{D(ON)}$	36	0.8 V			14.0 V		15.0 V	-15.0 V					14.0 V			K7	4	-100	100	nA
		37	4.0 V		14.0 V								14.0 V				K6	3	-100	100	
		38	0.8 V			-14.0 V								-14.0 V			K7	4	-200	200	
		39	4.0 V		-14.0 V								-14.0 V				K6	3	-200	200	
	$I_{D(OFF)}$	40	0.8 V		-14.0 V									14.0 V			None	11	-100	100	
		41	4.0 V			-14.0 V							14.0 V					12			
		42	0.8 V		14.0 V								-14.0 V					11			
		43	4.0 V			14.0 V							-14.0 V					12			
	$I_{S(OFF)}$	44	0.8 V		-14.0 V									14.0 V				3			
		45	4.0 V			-14.0 V							14.0 V					4			
		46	0.8 V		14.0 V								-14.0 V					3			
		47	4.0 V			14.0 V							-14.0 V					4			
	I_{IL}	48	0.0 V															1	-1		µA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	GND	NC	NC	D_1	D_2	NC	NC					
2	I_{IH}	49	5.0 V					15.0 V	-15.0 V	GND							None	1	-1		µA
T_A = 125°C	I_{IH}	50	15.0 V															1		1	µA
	$+I_{CC}$	51	0.8 V															6		0.01	mA
	$+I_{CC}$	52	4.0 V															6		.5	
	$-I_{CC}$	53	0.8 V															7	-0.01		
	$-I_{CC}$	54	4.0 V															7	-0.01		
3	R_{DS}	55	0.8 V			10 mA								-10.0 V				4		-9.5	V 2/
T_A = -55°C		56	4.0 V		10 mA								-10.0 V					3		-9.5	
		57	0.8 V			-10 mA								10.0 V				4	9.5		
		58	4.0 V		-10 mA								10.0 V					3	9.5		
		59	0.8 V			10 mA		10.0 V	-10.0 V					-7.5 V				4		-6.8	
		60	4.0 V		10 mA								-7.5 V					3		-6.8	
		61	0.8 V			-10 mA								7.5 V				4	6.8		
		62	4.0 V		-10 mA								7.5 V					3	6.8		
	$I_{D(ON)}$	63	0.8 V			14.0 V		15.0 V	-15.0 V					14.0 V			K7	4	-100	100	nA
		64	4.0 V		14.0 V								14.0 V				K6	3	-100	100	
		65	0.8 V			-14.0 V								-14.0 V			K7	4	-200	200	
		66	4.0 V		-14.0 V								-14.0 V				K6	3	-200	200	
	$I_{D(OFF)}$	67	0.8 V		-14.0 V								14.0 V				None	11	-100	100	
		68	4.0 V			-14.0 V								14.0 V				12			
		69	0.8 V		14.0 V								-14.0 V					11			
		70	4.0 V			14.0 V								-14.0 V				12			
	$I_{S(OFF)}$	71	0.8 V		-14.0 V								14.0 V					3			
		72	4.0 V			-14.0 V								14.0 V				4			
		73	0.8 V		14.0 V								-14.0 V					3			
		74	4.0 V			14.0 V								-14.0 V				4			
	I_{IL}	75	0.0 V															1	-1		µA
	I_{IH}	76	5.0 V															1	-1		µA
	I_{IH}	77	15.0 V															1		1	µA
	$+I_{CC}$	78	0.8 V															6		0.01	mA
	$+I_{CC}$	79	4.0 V															6		1.0	
	$-I_{CC}$	80	0.8 V															7	-0.01		
	$-I_{CC}$	81	4.0 V															7	-0.01		
4	V_{CTE}	82	IN 3/		GND												K2	11		15	mV
T_A = 25°C		83	IN 3/			GND											K3	12		15	mV
7	V_{CT}	84	4.0 V		IN 4/												K1	12	50	3.16	mV_{p-p} dB
T_A = 25°C			$dB_{CT} = -20 \log (V_{OUT}/V_{IN})$																		
	V_{ISO}	85	4.0 V			IN 4/		15.0 V	-15.0 V	GND							K1	12		3.16	mV_{p-p}
		86	0.8 V		IN 4/			15.0 V	-15.0 V	GND							K1	11	50	3.16	mV_{p-p} dB
			$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$																		
9	t_{ON}	87	IN		IN			15.0 V	-15.0 V	GND			OUT				K4	11		300	ns
T_A = 25°C		88				IN								OUT			K5	12		300	
	t_{OFF}	89			IN								OUT				K4	11		250	
		90				IN								OUT			K5	12		250	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	GND	NC	NC	D_1	D_2	NC	NC					
10	t_{ON}	91	IN		IN			15.0 V	-15.0 V	GND			OUT				K4	11		360	ns
T_A = 125°C	t_{ON}	92				IN								OUT			K5	12		360	
	t_{OFF}	93			IN								OUT				K4	11		290	
	t_{OFF}	94				IN								OUT			K5	12		290	
11	t_{ON}	95			IN								OUT				K4	11		260	
T_A = -55°C	t_{ON}	96				IN								OUT			K5	12		260	
	t_{OFF}	97			IN								OUT				K4	11		230	
	t_{OFF}	98				IN								OUT			K5	12		230	
12	C_{C1}	99	0.0 V														None	1		6	pF
T_A = 25°C	C_{C2}	100	15.0 V															1		3.5	
	C_{IS}	101																3		14	
	C_{IS}	102																4		14	
	C_{OS}	103																11		14	
	C_{OS}	104																12		14	
13	t_D	105	IN		IN	IN											K4,K8	11	20		ns
T_A = -55°C	t_D	106	IN		IN	IN											K4,K8	12	20		

See footnotes at end of table.

Source: https://assist.dla.mil 36 Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
1	R_{DS}	1	4.0 V	10 mA				15.0 V	-15.0 V	GND		-10.0 V					None	2		-9.5	V 2/
T_A = 25°C		2	4.0 V		10 mA								-10.0 V					3		-9.5	
		3				10 mA								-10.0 V		4.0 V		4		-9.5	
		4					10 mA								-10.0 V	4.0 V		5		-9.5	
		5	4.0 V	-10 mA								10.0 V						2	9.5		
		6	4.0 V		-10 mA								10.0 V					3	9.5		
		7				-10 mA								10.0 V		4.0 V		4	9.5		
		8					-10 mA								10.0 V	4.0 V		5	9.5		
		9	4.0 V	10 mA				10.0 V	-10.0 V			-7.5 V						2		-6.8	
		10	4.0 V		10 mA								-7.5 V					3			
		11				10 mA								-7.5 V		4.0 V		4			
		12					10 mA								-7.5 V	4.0 V		5			
		13	4.0 V	-10 mA								7.5 V						2	6.8		
		14	4.0 V		-10 mA								7.5 V					3			
		15				-10 mA								7.5 V		4.0 V		4			
		16					-10 mA								7.5 V	4.0 V		5			
	$I_{D(ON)}$	17	4.0 V	14.0 V				15.0 V	-15.0 V			14.0 V					K10	2	-1	1	nA
		18	4.0 V		14.0 V								14.0 V				K11	3	-1	1	
		19				14.0 V								14.0 V		4.0 V	K12	4	-1	1	
		20					14.0 V								14.0 V	4.0 V	K13	5	-1	1	
		21	4.0 V	-14.0 V								-14.0 V					K10	2	-2	2	
		22	4.0 V		-14.0 V								-14.0 V				K11	3	-2	2	
		23				-14.0 V								-14.0 V		4.0 V	K12	4	-2	2	
		24					-14.0 V								-14.0 V	4.0 V	K13	5	-2	2	
	$I_{D(OFF)}$	25	0.8 V	-14.0 V								14.0 V					None	10	-1	1	
		26	0.8 V		-14.0 V								14.0 V					11			
		27				-14.0 V								14.0 V		0.8 V		12			
		28					-14.0 V								14.0 V	0.8 V		13			
		29	0.8 V	14.0 V								-14.0 V						10			
		30	0.8 V		14.0 V								-14.0 V					11			
		31				14.0 V								-14.0 V		0.8 V		12			
		32					14.0 V								-14.0 V	0.8 V		13			
	$I_{S(OFF)}$	33	0.8 V	-14.0 V								14.0 V						2			
		34	0.8 V		-14.0 V								14.0 V					3			
		35				-14.0 V								14.0 V		0.8 V		4			
		36					-14.0 V								14.0 V	0.8 V		5			
		37	0.8 V	14.0 V								-14.0 V						2			
		38	0.8 V		14.0 V								-14.0 V					3			
		39				14.0 V								-14.0 V		0.8 V		4			
		40					14.0 V								-14.0 V	0.8 V		5			
	I_{IL}	41	0.0 V															1			μA
	I_{IL}	42														0.0 V		14			
	I_{IH}	43	5.0 V															1			
		44														5.0 V		14			
		45	15.0 V															1		1	
		46														15.0 V		14		1	
	$+I_{CC}$	47	0.8 V													0.8 V		6		0.01	mA
	$+I_{CC}$	48	4.0 V													4.0 V		6		1.0	
	$-I_{CC}$	49	0.8 V													0.8 V		7	-0.01		
	$-I_{CC}$	50	4.0 V													4.0 V		7	-0.01		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
2	R_{DS}	51	4.0 V	10 mA				15.0 V	-15.0 V	GND		-10.0 V					None	2		-9.25	V 2/
T_A = 125°C		52	4.0 V		10 mA								-10.0 V					3		-9.25	
		53				10 mA								-10.0 V		4.0 V		4		-9.25	
		54					10 mA								-10.0 V	4.0 V		5		-9.25	
		55	4.0 V	-10 mA								10.0 V						2	9.25		
		56	4.0 V		-10 mA								10.0 V					3	9.25		
		57				-10 mA								10.0 V		4.0 V		4	9.25		
		58					-10 mA								10.0 V	4.0 V		5	9.25		
		59	4.0 V	10 mA				10.0 V	-10.0 V			-7.5 V						2		-6.5	
		60	4.0 V		10 mA								-7.5 V					3			
		61				10 mA								-7.5 V		4.0 V		4			
		62					10 mA								-7.5 V	4.0 V		5			
		63	4.0 V	-10 mA								7.5 V						2	6.5		
		64	4.0 V		-10 mA								7.5 V					3			
		65				-10 mA								7.5 V		4.0 V		4			
		66					-10 mA								7.5 V	4.0 V		5			
	$I_{D(ON)}$	67	4.0 V	14.0 V				15.0 V	-15.0 V			14.0 V					K10	2	-100	100	nA
		68	4.0 V		14.0 V								14.0 V				K11	3	-100	100	
		69				14.0 V								14.0 V		4.0 V	K12	4	-100	100	
		70					14.0 V								14.0 V	4.0 V	K13	5	-100	100	
		71	4.0 V	-14.0 V								-14.0 V					K10	2	-200	200	
		72	4.0 V		-14.0 V								-14.0 V				K11	3	-200	200	
		73				-14.0 V								-14.0 V		4.0 V	K12	4	-200	200	
		74					-14.0 V								-14.0 V	4.0 V	K13	5	-200	200	
	$I_{D(OFF)}$	75	0.8 V	-14.0 V								14.0 V					None	10	-100	100	
		76	0.8 V		-14.0 V								14.0 V					11			
		77				-14.0 V								14.0 V		0.8 V		12			
		78					-14.0 V								14.0 V	0.8 V		13			
		79	0.8 V	14.0 V								-14.0 V						10			
		80	0.8 V		14.0 V								-14.0 V					11			
		81				14.0 V								-14.0 V		0.8 V		12			
		82					14.0 V								-14.0 V	0.8 V		13			
	$I_{S(OFF)}$	83	0.8 V	-14.0 V								14.0 V						2			
		84	0.8 V		-14.0 V								14.0 V					3			
		85				-14.0 V								14.0 V		0.8 V		4			
		86					-14.0 V								14.0 V	0.8 V		5			
		87	0.8 V	14.0 V								-14.0 V						2			
		88	0.8 V		14.0 V								-14.0 V					3			
		89				14.0 V								-14.0 V		0.8 V		4			
		90					14.0 V								-14.0 V	0.8 V		5			
	I_{IL}	91	0.0 V															1	-1		μA
	I_{IL}	92														0.0 V		14	-1		
	I_{IH}	93	5.0 V															1	-1		
		94														5.0 V		14	-1		
		95	15.0 V															1		1	
		96														15.0 V		14		1	
	$+I_{CC}$	97	0.8 V													0.8 V		6		0.1	mA
	$+I_{CC}$	98	4.0 V													4.0 V		6		1.0	
	$-I_{CC}$	99	0.8 V													0.8 V		7	-0.1		
	$-I_{CC}$	100	4.0 V													4.0 V		7	-0.1		

See footnotes at end of table.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
3	R_{DS}	101	4.0 V	10 mA				15.0 V	-15.0 V	GND		-10.0 V					None	2		-9.5	V 2/
T_A = -55°C		102	4.0 V		10 mA								-10.0 V					3		-9.5	
		103				10 mA								-10.0 V		4.0 V		4		-9.5	
		104					10 mA								-10.0 V	4.0 V		5		-9.5	
		105	4.0 V	-10 mA								10.0 V						2	9.5		
		106	4.0 V		-10 mA								10.0 V					3	9.5		
		107				-10 mA								10.0 V		4.0 V		4	9.5		
		108					-10 mA								10.0 V	4.0 V		5	9.5		
		109	4.0 V	10 mA				10.0 V	-10.0 V			-7.5 V						2		-6.8	
		110	4.0 V		10 mA								-7.5 V					3			
		111				10 mA								-7.5 V		4.0 V		4			
		112					10 mA								-7.5 V	4.0 V		5			
		113	4.0 V	-10 mA								7.5 V						2	6.8		
		114	4.0 V		-10 mA								7.5 V					3			
		115				-10 mA								7.5 V		4.0 V		4			
		116					-10 mA								7.5 V	4.0 V		5			
	$I_{D(ON)}$	117	4.0 V	14.0 V				15.0 V	-15.0 V			14.0 V					K10	2	-100	100	nA
		118	4.0 V		14.0 V								14.0 V				K11	3			
		119				14.0 V								14.0 V		4.0 V	K12	4			
		120					14.0 V								14.0 V	4.0 V	K13	5			
		121	4.0 V	-14.0 V								-14.0 V					K10	2	-200	200	
		122	4.0 V		-14.0 V								-14.0 V				K11	3			
		123				-14.0 V								-14.0 V		4.0 V	K12	4			
		124					-14.0 V								-14.0 V	4.0 V	K13	5			
	$I_{D(OFF)}$	125	0.8 V	-14.0 V								14.0 V					None	10	-100	100	
		126	0.8 V		-14.0 V								14.0 V					11			
		127				-14.0 V								14.0 V		0.8 V		12			
		128					-14.0 V								14.0 V	0.8 V		13			
		129	0.8 V	14.0 V								-14.0 V						10			
		130	0.8 V		14.0 V								-14.0 V					11			
		131				14.0 V								-14.0 V		0.8 V		12			
		132					14.0 V								-14.0 V	0.8 V		13			
	$I_{S(OFF)}$	133	0.8 V	-14.0 V								14.0 V						2			
		134	0.8 V		-14.0 V								14.0 V					3			
		135				-14.0 V								14.0 V		0.8 V		4			
		136					-14.0 V								14.0 V	0.8 V		5			
		137	0.8 V	14.0 V								-14.0 V						2			
		138	0.8 V		14.0 V								-14.0 V					3			
		139				14.0 V								-14.0 V		0.8 V		4			
		140					14.0 V								-14.0 V	0.8 V		5			
	I_{IL}	141	0.0 V															1	-1		μA
	I_{IL}	142														0.0 V		14	-1		
	I_{IH}	143	5.0 V															1	-1		
		144														5.0 V		14	-1		
		145	15.0 V															1		1	
		146														15.0 V		14		1	
	$+I_{CC}$	147	0.8 V													0.8 V		6		0.01	mA
	$+I_{CC}$	148	4.0 V													4.0 V		6		2.0	
	$-I_{CC}$	149	0.8 V													0.8 V		7	-0.01		
	$-I_{CC}$	150	4.0 V													4.0 V		7	-0.01		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
4	V_{CTE}	151	IN 3/	GND				15.0 V	-15.0 V	GND							K2	10		15	mV
T_A = 25°C		152	IN 3/		GND												K4	11			
		153				GND										IN 3/	K5	12			
		154					GND									IN 3/	K3	13			
7	V_{CT}	155	4.0 V	IN 4/													K1	12		3.16	mV_{p-p}
T_A = 25°C	V_{CT}	156				IN 4/										4.0 V	K1	10		3.16	mV_{p-p}
			$dB_{CT} = -20 \log (V_{OUT}/V_{IN})$																50		dB
	V_{ISO}	157	0.8 V	IN 4/				15.0 V	-15.0 V	GND							K1	10		3.16	mV_{p-p}
		158	0.8 V		IN 4/												K1	11		3.16	
		159				IN 4/										0.8 V	K1	12		3.16	
		160					IN 4/									0.8 V	K1	13			
			$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$																50		dB
9	t_{ON}	161	IN	IN				15.0 V	-15.0 V	GND		OUT					K6	2 to 10		300	ns
T_A = 25°C		162	IN		IN								OUT				K8	3 to 11			
		163				IN								OUT		IN	K9	4 to 12			
		164					IN								OUT	IN	K7	5 to 13			
	t_{OFF}	165	IN	IN								OUT					K6	2 to 10		250	
		166	IN		IN								OUT				K8	3 to 11			
		167				IN								OUT		IN	K9	4 to 12			
		168					IN								OUT	IN	K7	5 to 13			
10	t_{ON}	169	IN	IN								OUT					K6	2 to 10		360	
T_A = 125°C		170	IN		IN								OUT				K8	3 to 11			
		171				IN								OUT		IN	K9	4 to 12			
		172					IN								OUT	IN	K7	5 to 13			
	t_{OFF}	173	IN	IN								OUT					K6	2 to 10		290	
		174	IN		IN								OUT				K8	3 to 11			
		175				IN								OUT		IN	K9	4 to 12			
		176					IN								OUT	IN	K7	5 to 13			
11	t_{ON}	177	IN	IN								OUT					K6	2 to 10		260	
T_A = -55°C		178	IN		IN								OUT				K8	3 to 11			
		179				IN								OUT		IN	K9	4 to 12			
		180					IN								OUT	IN	K7	5 to 13			
	t_{OFF}	181	IN	IN								OUT					K6	2 to 10		230	
		182	IN		IN								OUT				K8	3 to 11			
		183				IN								OUT		IN	K9	4 to 12			
		184					IN								OUT	IN	K7	5 to 13			
12	C_{C1}	185	0.0 V														None	1		6	pf
T_A = 25°C		186														0.0 V		14		6	
	C_{C2}	187	15.0 V															1		3.5	
		188														15.0 V		14		3.5	
	C_{IS}	189																2		14	
		190																3			
		191																4			
		192																5			
	C_{OS}	193																10			
		194																11			
		195																12			
		196																13			

See footnotes at end of table.

Source: https://assist.dla.mil/ - Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
1	R_{DS}	1	4.0 V	10 mA				15.0 V	-15.0 V	GND		-10.0 V					None	2		-9.5	V 2/
T_A = 25°C		2	0.8 V		10 mA								-10.0 V					3		-9.5	
		3				10 mA								-10.0 V		4.0 V		4		-9.5	
		4					10 mA								-10.0 V	0.8 V		5		-9.5	
		5	4.0 V	-10 mA								10.0 V						2	9.5		
		6	0.8 V		-10 mA								10.0 V					3	9.5		
		7				-10 mA								10.0 V		4.0 V		4	9.5		
		8					-10 mA								10.0 V	0.8 V		5	9.5		
		9	4.0 V	10 mA				10.0 V	-10.0 V			-7.5 V						2		-6.8	
		10	0.8 V		10 mA								-7.5 V					3			
		11				10 mA								-7.5 V		4.0 V		4			
		12					10 mA								-7.5 V	0.8 V		5			
		13	4.0 V	-10 mA								7.5 V						2	6.8		
		14	0.8 V		-10 mA								7.5 V					3			
		15				-10 mA								7.5 V		4.0 V		4			
		16					-10 mA								7.5 V	0.8 V		5			
	$I_{D(ON)}$	17	4.0 V	14.0 V				15.0 V	-15.0 V			14.0 V					K10	2	-1	1	nA
		18	0.8 V		14.0 V								14.0 V				K11	3	-1	1	
		19				14.0 V								14.0 V		4.0 V	K12	4	-1	1	
		20					14.0 V								14.0 V	0.8 V	K13	5	-1	1	
		21	4.0 V	-14.0 V								-14.0 V					K10	2	-2	2	
		22	0.8 V		-14.0 V								-14.0 V				K11	3	-2	2	
		23				-14.0 V								-14.0 V		4.0 V	K12	4	-2	2	
		24					-14.0 V								-14.0 V	0.8 V	K13	5	-2	2	
	$I_{D(OFF)}$	25	0.8 V	-14.0 V								14.0 V					None	10	-1	1	
		26	4.0 V		-14.0 V								14.0 V					11			
		27				-14.0 V								14.0 V		0.8 V		12			
		28					-14.0 V								14.0 V	4.0 V		13			
		29	0.8 V	14.0 V								-14.0 V						10			
		30	4.0 V		14.0 V								-14.0 V					11			
		31				14.0 V								-14.0 V		0.8 V		12			
		32					14.0 V								-14.0 V	4.0 V		13			
	$I_{S(OFF)}$	33	0.8 V	-14.0 V								14.0 V						2			
		34	4.0 V		-14.0 V								14.0 V					3			
		35				-14.0 V								14.0 V		0.8 V		4			
		36					-14.0 V								14.0 V	4.0 V		5			
		37	0.8 V	14.0 V								-14.0 V						2			
		38	4.0 V		14.0 V								-14.0 V					3			
		39				14.0 V								-14.0 V		0.8 V		4			
		40					14.0 V								-14.0 V	4.0 V		5			
	I_{IL}	41	0.0 V															1			μA
	I_{IL}	42														0.0 V		14			
	I_{IH}	43	5.0 V															1			
		44														5.0 V		14			
		45	15.0 V															1		1	
		46														15.0 V		14		1	
	$+I_{CC}$	47	0.8 V													0.8 V		6		0.01	mA
	$+I_{CC}$	48	4.0 V													4.0 V		6		1.0	
	$-I_{CC}$	49	0.8 V													0.8 V		7	-0.01		
	$-I_{CC}$	50	4.0 V													4.0 V		7	-0.01		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
2	R_{DS}	51	4.0 V	10 mA				15.0 V	-15.0 V	GND		-10.0 V					None	2		-9.25	V 2/
T_A = 125°C		52	0.8 V		10 mA								-10.0 V					3		-9.25	
		53				10 mA								-10.0 V		4.0 V		4		-9.25	
		54					10 mA								-10.0 V	0.8 V		5		-9.25	
		55	4.0 V	-10 mA								10.0 V						2	9.25		
		56	0.8 V		-10 mA								10.0 V					3	9.25		
		57				-10 mA								10.0 V		4.0 V		4	9.25		
		58					-10 mA								10.0 V	0.8 V		5	9.25		
		59	4.0 V	10 mA				10.0 V	-10.0 V			-7.5 V						2		-6.5	
		60	0.8 V		10 mA								-7.5 V					3			
		61				10 mA								-7.5 V		4.0 V		4			
		62					10 mA								-7.5 V	0.8 V		5			
		63	4.0 V	-10 mA								7.5 V						2	6.5		
		64	0.8 V		-10 mA								7.5 V					3			
		65				-10 mA								7.5 V		4.0 V		4			
		66					-10 mA								7.5 V	0.8 V		5			
	$I_{D(ON)}$	67	4.0 V	14.0 V				15.0 V	-15.0 V			14.0 V					K10	2	-100	100	nA
		68	0.8 V		14.0 V								14.0 V				K11	3			
		69				14.0 V								14.0 V		4.0 V	K12	4			
		70					14.0 V								14.0 V	0.8 V	K13	5			
		71	4.0 V	-14.0 V								-14.0 V					K10	2	-200	200	
		72	0.8 V		-14.0 V								-14.0 V				K11	3			
		73				-14.0 V								-14.0 V		4.0 V	K12	4			
		74					-14.0 V								-14.0 V	0.8 V	K13	5			
	$I_{D(OFF)}$	75	0.8 V	-14.0 V								14.0 V					None	10	-100	100	
		76	4.0 V		-14.0 V								14.0 V					11			
		77				-14.0 V								14.0 V		0.8 V		12			
		78					-14.0 V								14.0 V	4.0 V		13			
		79	0.8 V	14.0 V								-14.0 V						10			
		80	4.0 V		14.0 V								-14.0 V					11			
		81				14.0 V								-14.0 V		0.8 V		12			
		82					14.0 V								-14.0 V	4.0 V		13			
	$I_{S(OFF)}$	83	0.8 V	-14.0 V								14.0 V						2			
		84	4.0 V		-14.0 V								14.0 V					3			
		85				-14.0 V								14.0 V		0.8 V		4			
		86					-14.0 V								14.0 V	4.0 V		5			
		87	0.8 V	14.0 V								-14.0 V						2			
		88	4.0 V		14.0 V								-14.0 V					3			
		89				14.0 V								-14.0 V		0.8 V		4			
		90					14.0 V								-14.0 V	4.0 V		5			
	I_{IL}	91	0.0 V															1	-1		µA
	I_{IL}	92														0.0 V		14	-1		
	I_{IH}	93	5.0 V															1	-1		
		94														5.0 V		14	-1		
		95	15.0 V															1		1	
		96														15.0 V		14		1	
	$+I_{CC}$	97	0.8 V													0.8 V		6		0.1	mA
	$+I_{CC}$	98	4.0 V													4.0 V		6		1.0	
	$-I_{CC}$	99	0.8 V													0.8 V		7	-0.1		
	$-I_{CC}$	100	4.0 V													4.0 V		7	-0.1		

See footnotes at end of table.

Source: https://assist.dla.mil Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
3	R_{DS}	101	4.0 V	10 mA				15.0 V	-15.0 V	GND		-10.0 V					None	2		-9.5	V 2/
T_A = -55°C		102	0.8 V		10 mA								-10.0 V					3		-9.5	
		103				10 mA								-10.0 V		4.0 V		4		-9.5	
		104					10 mA								-10.0 V	0.8 V		5		-9.5	
		105	4.0 V	-10 mA								10.0 V						2	9.5		
		106	0.8 V		-10 mA								10.0 V					3	9.5		
		107				-10 mA								10.0 V		4.0 V		4	9.5		
		108					-10 mA								10.0 V	0.8 V		5	9.5		
		109	4.0 V	10 mA				10.0 V	-10.0 V			-7.5 V						2		-6.8	
		110	0.8 V		10 mA								-7.5 V					3			
		111				10 mA								-7.5 V		4.0 V		4			
		112					10 mA								-7.5 V	0.8 V		5			
		113	4.0 V	-10 mA								7.5 V						2	6.8		
		114	0.8 V		-10 mA								7.5 V					3			
		115				-10 mA								7.5 V		4.0 V		4			
		116					-10 mA								7.5 V	0.8 V		5			
	$I_{D(ON)}$	117	4.0 V	14.0 V				15.0 V	-15.0 V			14.0 V					K10	2	-100	100	nA
		118	0.8 V		14.0 V								14.0 V				K11	3			
		119				14.0 V								14.0 V		4.0 V	K12	4			
		120					14.0 V								14.0 V	0.8 V	K13	5			
		121	4.0 V	-14.0 V								-14.0 V					K10	2	-200	200	
		122	0.8 V		-14.0 V								-14.0 V				K11	3			
		123				-14.0 V								-14.0 V		4.0 V	K12	4			
		124					-14.0 V								-14.0 V	0.8 V	K13	5			
	$I_{D(OFF)}$	125	0.8 V	-14.0 V								14.0 V					None	10	-100	100	
		126	4.0 V		-14.0 V								14.0 V					11			
		127				-14.0 V								14.0 V		0.8 V		12			
		128					-14.0 V								14.0 V	4.0 V		13			
		129	0.8 V	14.0 V								-14.0 V						10			
		130	4.0 V		14.0 V								-14.0 V					11			
		131				14.0 V								-14.0 V		0.8 V		12			
		132					14.0 V								-14.0 V	4.0 V		13			
	$I_{S(OFF)}$	133	0.8 V	-14.0 V								14.0 V						2			
		134	4.0 V		-14.0 V								14.0 V					3			
		135				-14.0 V								14.0 V		0.8 V		4			
		136					-14.0 V								14.0 V	4.0 V		5			
		137	0.8 V	14.0 V								-14.0 V						2			
		138	4.0 V		14.0 V								-14.0 V					3			
		139				14.0 V								-14.0 V		0.8 V		4			
		140					14.0 V								-14.0 V	4.0 V		5			
	I_{IL}	141	0.0 V															1	-1		μA
	I_{IL}	142														0.0 V		14	-1		
	I_{IH}	143	5.0 V															1	-1		
		144														5.0 V		14	-1		
		145	15.0 V															1		1	
		146														15.0 V		14		1	
	$+I_{CC}$	147	0.8 V													0.8 V		6		0.01	mA
	$+I_{CC}$	148	4.0 V													4.0 V		6		2.0	
	$-I_{CC}$	149	0.8 V													0.8 V		7	-0.01		
	$-I_{CC}$	150	4.0 V													4.0 V		7	-0.01		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
4	V_{CTE}	151	IN 3/	GND				15.0 V	-15.0 V	GND							K2	10		15	mV
T_A = 25°C		152	IN 3/		GND												K4	11			
		153				GND										IN 3/	K5	12			
		154					GND									IN 3/	K3	13			
7	V_{CT}	155	4.0 V	IN 4/													K1	12		3.16	mV_{p-p}
T_A = 25°C	V_{CT}	156			IN 4/											4.0 V	K1	10		3.16	mV_{p-p}
			$dB_{CT} = -20 \log (V_{OUT}/V_{IN})$																50		dB
	V_{ISO}	157	0.8 V	IN 4/				15.0 V	-15.0 V	GND							K1	10		3.16	mV_{p-p}
		158	0.8 V		IN 4/												K1	11		3.16	
		159				IN 4/										0.8 V	K1	12		3.16	
		160					IN 4/									0.8 V	K1	13		3.16	
			$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$																50		dB
9	t_{ON}	161	IN	IN				15.0 V	-15.0 V	GND		OUT					K6	2 to 10		300	ns
T_A = 25°C		162	IN		IN								OUT				K8	3 to 11			
		163				IN								OUT		IN	K9	4 to 12			
		164					IN								OUT	IN	K7	5 to 13			
	t_{OFF}	165	IN	IN								OUT					K6	2 to 10		250	
		166	IN		IN								OUT				K8	3 to 11			
		167				IN								OUT		IN	K9	4 to 12			
		168					IN								OUT	IN	K7	5 to 13			
10	t_{ON}	169	IN	IN								OUT					K6	2 to 10		360	
T_A = 125°C		170	IN		IN								OUT				K8	3 to 11			
		171				IN								OUT		IN	K9	4 to 12			
		172					IN								OUT	IN	K7	5 to 13			
	t_{OFF}	173	IN	IN								OUT					K6	2 to 10		290	
		174	IN		IN								OUT				K8	3 to 11			
		175				IN								OUT		IN	K9	4 to 12			
		176					IN								OUT	IN	K7	5 to 13			
11	t_{ON}	177	IN	IN								OUT					K6	2 to 10		260	
T_A = -55°C		178	IN		IN								OUT				K8	3 to 11			
		179				IN								OUT		IN	K9	4 to 12			
		180					IN								OUT	IN	K7	5 to 13			
	t_{OFF}	181	IN	IN								OUT					K6	2 to 10		230	
		182	IN		IN								OUT				K8	3 to 11			
		183				IN								OUT		IN	K9	4 to 12			
		184					IN								OUT	IN	K7	5 to 13			
12	C_{C1}	185	0.0 V														None	1		6	pf
T_A = 25°C		186														0.0 V		14		6	
	C_{C2}	187	15.0 V															1		3.5	
		188														15.0 V		14		3.5	
	C_{IS}	189																2		14	
		190																3			
		191																4			
		192																5			
	C_{OS}	193																10			
		194																11			
		195																12			
		196																13			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number													Relays energized	Measured pin no.	Limits		Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14			Min	Max	
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
13	t_D	197	IN	IN	IN												K6,K14	11	20		ns
T_A = -55°C		198	IN	IN	IN												K6,K14	11	↓		↓
↓		199				IN	IN									IN	K7,K15	12			
		200				IN	IN									IN	K7,K15	12			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	GND	NC	NC	D_1	D_2	NC	IN_2					
1 T_A = 25°C	R_{DS}	1	11.0 V		10 mA			15.0 V	-15.0 V	GND			-10.0 V				None	3		-9.5	V 2/
		2				10 mA								-10.0 V		11.0 V		4		-9.5	
		3	11.0 V		-10 mA								10.0 V					3	9.5		
		4				-10 mA								10.0 V		11.0 V		4	9.5		
		5	11.0 V		10 mA			10.0 V	-10.0 V				-7.5 V					3		-6.8	
		6				10 mA								-7.5 V		11.0 V		4		-6.8	
		7	11.0 V		-10 mA								7.5 V					3	6.8		
		8				-10 mA								7.5 V		11.0 V		4	6.8		
	$I_{D(ON)}$	9	11.0 V		14.0 V			15.0 V	-15.0 V				14.0 V				K6	3	-1	1	nA
		10				14.0 V								14.0 V		11.0 V	K7	4	-1	1	
		11	11.0 V		-14.0 V								-14.0 V				K6	3	-2	2	
		12				-14.0 V								-14.0 V		11.0 V	K7	4	-2	2	
	$I_{D(OFF)}$	13	3.5 V		-14.0 V								14.0 V				None	11	-1	1	
		14				-14.0 V								14.0 V		3.5 V		12			
		15	3.5 V		14.0 V								-14.0 V					11			
		16				14.0 V								-14.0 V		3.5 V		12			
	$I_{S(OFF)}$	17	3.5 V		-14.0 V								14.0 V					3			
		18				-14.0 V								14.0 V		3.5 V		4			
		19	3.5 V		14.0 V								-14.0 V					3			
		20				14.0 V								-14.0 V		3.5 V		4			
	I_{IL}	21	0.0 V															1			μA
	I_{IL}	22														0.0 V		14			
	I_{IH}	23	15.0 V															1		1	
		24														15.0 V		14		1	
	$+I_{CC}$	25	0.0 V													0.0 V		6		0.01	mA
	$+I_{CC}$	26	15.0 V													15.0 V		6		0.01	
	$-I_{CC}$	27	0.0 V													0.0 V		7	-0.01		
	$-I_{CC}$	28	15.0 V													15.0 V		7	-0.01		
2 T_A = 125°C	R_{DS}	29	11.0 V		10 mA								-10.0 V					3		-9.25	V 2/
		30				10 mA								-10.0 V		11.0 V		4		-9.25	
		31	11.0 V		-10 mA								10.0 V					3	9.25		
		32				-10 mA								10.0 V		11.0 V		4	9.25		
		33	11.0 V		10 mA			10.0 V	-10.0 V				-7.5 V					3		-6.5	
		34				10 mA								-7.5 V		11.0 V		4		-6.5	
		35	11.0 V		-10 mA								7.5 V					3	6.5		
		36				-10 mA								7.5 V		11.0 V		4	6.5		
	$I_{D(ON)}$	37	11.0 V		14.0 V			15.0 V	-15.0 V				14.0 V				K6	3	-100	100	nA
		38				14.0 V								14.0 V		11.0 V	K7	4	-100	100	
		39	11.0 V		-14.0 V								-14.0 V				K6	3	-200	200	
		40				-14.0 V								-14.0 V		11.0 V	K7	4	-200	200	
	$I_{D(OFF)}$	41	3.5 V		-14.0 V								14.0 V				None	11	-100	100	
		42				-14.0 V								14.0 V		3.5 V		12			
		43	3.5 V		14.0 V								-14.0 V					11			
		44				14.0 V								-14.0 V		3.5 V		12			
	$I_{S(OFF)}$	45	3.5 V		-14.0 V								14.0 V					3			
		46				-14.0 V								14.0 V		3.5 V		4			
		47	3.5 V		14.0 V								-14.0 V					3			
		48				14.0 V								-14.0 V		3.5 V		4			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	GND	NC	NC	D_1	D_2	NC	IN_2					
2 T_A = 125°C	I_{IL}	49	0.0 V					15.0 V	-15.0 V	GND							None	1	-1		µA
		50														0.0 V		14	-1		
	I_{IH}	51	15.0 V															1		1	
		52														15.0 V		14		1	
	$+I_{CC}$	53	0.0 V													0.0 V		6		0.1	mA
		54	15.0 V													15.0 V		6		0.1	
	$-I_{CC}$	55	0.0 V													0.0 V		7	-0.1		
		56	15.0 V													15.0 V		7	-0.1		
3 T_A = -55°C	R_{DS}	57	11.0 V		10 mA								-10.0 V					3		-9.5	V 2/
		58				10 mA								-10.0 V		11.0 V		4		-9.5	
		59	11.0 V		-10 mA								10.0 V					3	9.5		
		60				-10 mA								10.0 V		11.0 V		4	9.5		
		61	11.0 V		10 mA			10.0 V	-10.0 V				-7.5 V					3		-6.8	
		62				10 mA								-7.5 V		11.0 V		4		-6.8	
		63	11.0 V		-10 mA								7.5 V					3	6.8		
		64				-10 mA								7.5 V		11.0 V		4	6.8		
	$I_{D(ON)}$	65	11.0 V		14.0 V			15.0 V	-15.0 V				14.0 V				K6	3	-100	100	nA
		66				14.0 V								14.0 V		11.0 V	K7	4	-100	100	
		67	11.0 V		-14.0 V								-14.0 V				K6	3	-200	200	
		68				-14.0 V								-14.0 V		11.0 V	K7	4	-200	200	
	$I_{D(OFF)}$	69	3.5 V		-14.0 V								14.0 V				None	11	-100	100	
		70				-14.0 V								14.0 V		3.5 V		12			
		71	3.5 V		14.0 V								-14.0 V					11			
		72				14.0 V								-14.0 V		3.5 V		12			
	$I_{S(OFF)}$	73	3.5 V		-14.0 V								14.0 V					3			
		74				-14.0 V								14.0 V		3.5 V		4			
		75	3.5 V		14.0 V								-14.0 V					3			
		76				14.0 V								-14.0 V		3.5 V		4			
	I_{IL}	77	0.0 V															1	-1		µA
		78														0.0 V		14	-1		
	I_{IH}	79	15.0 V															1		1	
		80														15.0 V		14		1	
	$+I_{CC}$	81	0.0 V													0.0 V		6		0.01	mA
		82	15.0 V													15.0 V		6		0.01	
	$-I_{CC}$	83	0.0 V													0.0 V		7	-0.01		
		84	15.0 V													15.0 V		7	-0.01		
4 T_A = 25°C	V_{CTE}	85	IN 3/		GND												K2	11		15	mV
		86				GND										IN 3/	K3	12		15	mV
7 T_A = 25°C	V_{CT}	87	3.5 V		IN 4/											11.0 V	K1	12	50	3.16	mV_{p-p} dB
			$dB_{CT} = -20 \log (V_{OUT}/V_{IN})$																		
	V_{ISO}	88	11.0 V		IN 4/			15.0 V	-15.0 V	GND							K1	11		3.16	mV_{p-p}
		89				IN 4/		15.0 V	-15.0 V	GND							K1	12		3.16	mV_{p-p}
			$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$																50		dB

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	GND	NC	NC	D_1	D_2	NC	IN_2					
9 T_A = 25°C	t_{ON}	90	IN		IN			15.0 V	-15.0 V	GND			OUT				K4	1 to 11		250	ns
		91				IN								OUT		IN	K5	14 to 12		250	
	t_{OFF}	92	IN		IN								OUT				K4	1 to 11		150	
		93				IN								OUT		IN	K5	14 to 12		150	
10 T_A = 125°C	t_{ON}	94	IN		IN								OUT				K4	1 to 11		290	
		95				IN								OUT		IN	K5	14 to 12		290	
	t_{OFF}	96	IN		IN								OUT				K4	1 to 11		160	
		97				IN								OUT		IN	K5	14 to 12		160	
11 T_A = -55°C	t_{ON}	98	IN		IN								OUT				K4	1 to 11		225	
		99				IN								OUT		IN	K5	14 to 12		225	
	t_{OFF}	100	IN		IN								OUT				K4	1 to 11		140	
		101				IN								OUT		IN	K5	14 to 12		140	
12 T_A = 25°C	C_{C1}	102	0.0 V														None	1		6	pf
		103														0.0 V		14		6	
	C_{C2}	104	15.0 V															1		3.5	
		105														15.0 V		14		3.5	
	C_{IS}	106																3		14	
		107																4		14	
	C_{OS}	108																11		14	
		109																12		14	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	GND	NC	NC	D_1	D_2	NC	NC					
1 T_A = 25°C	R_{DS}	1	3.5 V			10 mA		15.0 V	-15.0 V	GND				-10.0 V			None	4		-9.5	V 2/
		2	11.0 V		10 mA								-10.0 V					3		-9.5	
		3	3.5 V			-10 mA								10.0 V				4	9.5		
		4	11.0 V		-10 mA								10.0 V					3	9.5		
		5	3.5 V			10 mA		10.0 V	-10.0 V					-7.5 V				4		-6.8	
		6	11.0 V		10 mA								-7.5 V					3		-6.8	
		7	3.5 V			-10 mA								7.5 V				4	6.8		
		8	11.0 V		-10 mA								7.5 V					3	6.8		
	$I_{D(ON)}$	9	3.5 V			14.0 V		15.0 V	-15.0 V					14.0 V			K7	4	-1	1	nA
		10	11.0 V		14.0 V								14.0 V				K6	3	-1	1	
		11	3.5 V			-14.0 V								-14.0 V			K7	4	-2	2	
		12	11.0 V		-14.0 V								-14.0 V				K6	3	-2	2	
	$I_{D(OFF)}$	13	3.5 V		-14.0 V								14.0 V				None	11	-1	1	
		14	11.0 V			-14.0 V								14.0 V				12			
		15	3.5 V		14.0 V								-14.0 V					11			
		16	11.0 V			14.0 V								-14.0 V				12			
	$I_{S(OFF)}$	17	3.5 V		-14.0 V								14.0 V					3			
		18	11.0 V			-14.0 V								14.0 V				4			
		19	3.5 V		14.0 V								-14.0 V					3			
		20	11.0 V			14.0 V								-14.0 V				4			
	I_{IL}	21	0.0 V															1			µA
	I_{IH}	22	15.0 V															1		1	µA
	$+I_{CC}$	23	0.0 V															6		0.01	mA
	$+I_{CC}$	24	15.0 V															6		0.01	
	$-I_{CC}$	25	0.0 V															7	-0.01		
	$-I_{CC}$	26	15.0 V															7	-0.01		
2 T_A = 125°C	R_{DS}	27	3.5 V			10 mA								-10.0 V				4		-9.25	V 2/
		28	11.0 V		10 mA								-10.0 V					3		-9.25	
		29	3.5 V			-10 mA								10.0 V				4	9.25		
		30	11.0 V		-10 mA								10.0 V					3	9.25		
		31	3.5 V			10 mA		10.0 V	-10.0 V					-7.5 V				4		-6.5	
		32	11.0 V		10 mA								-7.5 V					3		-6.5	
		33	3.5 V			-10 mA								7.5 V				4	6.5		
		34	11.0 V		-10 mA								7.5 V					3	6.5		
	$I_{D(ON)}$	35	3.5 V			14.0 V		15.0 V	-15.0 V					14.0 V			K7	4	-100	100	nA
		36	11.0 V		14.0 V								14.0 V				K6	3	-100	100	
		37	3.5 V			-14.0 V								-14.0 V			K7	4	-200	200	
		38	11.0 V		-14.0 V								-14.0 V				K6	3	-200	200	
	$I_{D(OFF)}$	39	3.5 V		-14.0 V								14.0 V				None	11	-100	100	
		40	11.0 V			-14.0 V								14.0 V				12			
		41	3.5 V		14.0 V								-14.0 V					11			
		42	11.0 V			14.0 V								-14.0 V				12			
	$I_{S(OFF)}$	43	3.5 V		-14.0 V								14.0 V					3			
		44	11.0 V			-14.0 V								14.0 V				4			
		45	3.5 V		14.0 V								-14.0 V					3			
		46	11.0 V			14.0 V								-14.0 V				4			
	I_{IL}	47	0.0 V															1	-1		µA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	GND	NC	NC	D_1	D_2	NC	NC					
2 T_A = 125°C	I_{IH}	48	15.0 V					15.0 V	-15.0 V	GND							None	1		1	µA
	$+I_{CC}$	49	0.0 V															6		0.1	mA
	$+I_{CC}$	50	15.0 V															6		0.1	
	$-I_{CC}$	51	0.0 V															7	-0.1		
	$-I_{CC}$	52	15.0 V															7	-0.1		
3 T_A = -55°C	R_{DS}	53	3.5 V			10 mA								-10.0 V				4		-9.5	V 2/
		54	11.0 V		10 mA								-10.0 V					3		-9.5	
		55	3.5 V			-10 mA								10.0 V				4	9.5		
		56	11.0 V		-10 mA								10.0 V					3	9.5		
		57	3.5 V			10 mA		10.0 V	-10.0 V					-7.5 V				4		-6.8	
		58	11.0 V		10 mA								-7.5 V					3		-6.8	
		59	3.5 V			-10 mA								7.5 V				4	6.8		
		60	11.0 V		-10 mA								7.5 V					3	6.8		
	$I_{D(ON)}$	61	3.5 V			14.0 V		15.0 V	-15.0 V					14.0 V			K7	4	-100	100	nA
		62	11.0 V		14.0 V								14.0 V				K6	3	-100	100	
		63	3.5 V			-14.0 V								-14.0 V			K7	4	-200	200	
		64	11.0 V		-14.0 V								-14.0 V				K6	3	-200	200	
	$I_{D(OFF)}$	65	3.5 V		-14.0 V								14.0 V				None	11	-100	100	
		66	11.0 V			-14.0 V								14.0 V				12			
		67	3.5 V		14.0 V								-14.0 V					11			
		68	11.0 V			14.0 V								-14.0 V				12			
	$I_{S(OFF)}$	69	3.5 V		-14.0 V								14.0 V					3			
		70	11.0 V			-14.0 V								14.0 V				4			
		71	3.5 V		14.0 V								-14.0 V					3			
		72	11.0 V			14.0 V								-14.0 V				4			
	I_{IL}	73	0.0 V															1	-1		µA
	I_{IH}	74	15.0 V															1		1	µA
	$+I_{CC}$	75	0.0 V															6		0.01	mA
	$+I_{CC}$	76	15.0 V															6		0.01	
	$-I_{CC}$	77	0.0 V															7	-0.01		
	$-I_{CC}$	78	15.0 V															7	-0.01		
4 T_A = 25°C	V_{CTE}	79	IN 3/		GND												K2	11		15	mV
		80	IN 3/			GND											K3	12		15	mV
7 T_A = 25°C	V_{CT}	81	11.0 V		IN 4/												K1	12	50	3.16	mV_{p-p} dB
			$dB_{CT} = -20 \log (V_{OUT}/V_{IN})$																		
	V_{ISO}	82	11.0 V			IN 4/		15.0 V	-15.0 V	GND							K1	12		3.16	mV_{p-p}
		83	3.5 V		IN 4/			15.0 V	-15.0 V	GND							K1	11		3.16	mV_{p-p}
			$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$																50		dB
9 T_A = 25°C	t_{ON}	84	IN		IN			15.0 V	-15.0 V	GND			OUT				K4	11		250	ns
		85	IN			IN								OUT			K5	12		250	
	t_{OFF}	86	IN		IN								OUT				K4	11		150	
		87	IN			IN								OUT			K5	12		150	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	GND	NC	NC	D_1	D_2	NC	NC					
10 T_A = 125°C	t_{ON}	88	IN		IN			15.0 V	-15.0 V	GND			OUT				K4	11		290	ns
	t_{ON}	89				IN								OUT			K5	12		290	
	t_{OFF}	90			IN								OUT				K4	11		160	
	t_{OFF}	91				IN								OUT			K5	12		160	
11 T_A = -55°C	t_{ON}	92			IN								OUT				K4	11		225	
	t_{ON}	93				IN								OUT			K5	12		225	
	t_{OFF}	94			IN								OUT				K4	11		140	
	t_{OFF}	95				IN								OUT			K5	12		140	
12 TA = 25°C	C_{C1}	96	0.0 V														None	1		6	pF
	C_{C2}	97	15.0 V															1		3.5	
	C_{IS}	98																3		14	
	C_{IS}	99																4		14	
	C_{OS}	100																11		14	
	C_{OS}	101																12		14	
13 T_A = -55°C	t_D	102	IN		IN	IN											K4,K8	11	20		ns
		103	IN		IN	IN											K4,K8	12	20		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
1	R_{DS}	1	11.0 V	10 mA				15.0 V	-15.0 V	GND		-10.0 V					None	2		-9.5	V 2/
T_A = 25°C		2	11.0 V		10 mA								-10.0 V					3		-9.5	
		3				10 mA								-10.0 V		11.0 V		4		-9.5	
		4					10 mA								-10.0 V	11.0 V		5		-9.5	
		5	11.0 V	-10 mA								10.0 V						2	9.5		
		6	11.0 V		-10 mA								10.0 V					3	9.5		
		7				-10 mA								10.0 V		11.0 V		4	9.5		
		8					-10 mA								10.0 V	11.0 V		5	9.5		
		9	11.0 V	10 mA				10.0 V	-10.0 V			-7.5 V						2		-6.8	
		10	11.0 V		10 mA								-7.5 V					3			
		11				10 mA								-7.5 V		11.0 V		4			
		12					10 mA								-7.5 V	11.0 V		5			
		13	11.0 V	-10 mA								7.5 V						2	6.8		
		14	11.0 V		-10 mA								7.5 V					3			
		15				-10 mA								7.5 V		11.0 V		4			
		16					-10 mA								7.5 V	11.0 V		5			
	$I_{D(ON)}$	17	11.0 V	14.0 V				15.0 V	-15.0 V			14.0 V					K10	2	-1	1	nA
		18	11.0 V		14.0 V								14.0 V				K11	3	-1	1	
		19				14.0 V								14.0 V		11.0 V	K12	4	-1	1	
		20					14.0 V								14.0 V	11.0 V	K13	5	-1	1	
		21	11.0 V	-14.0 V								-14.0 V					K10	2	-2	2	
		22	11.0 V		-14.0 V								-14.0 V				K11	3	-2	2	
		23				-14.0 V								-14.0 V		11.0 V	K12	4	-2	2	
		24					-14.0 V								-14.0 V	11.0 V	K13	5	-2	2	
	$I_{D(OFF)}$	25	3.5 V	-14.0 V								14.0 V					None	10	-1	1	
		26	3.5 V		-14.0 V								14.0 V					11			
		27				-14.0 V								14.0 V		3.5 V		12			
		28					-14.0 V								14.0 V	3.5 V		13			
		29	3.5 V	14.0 V								-14.0 V						10			
		30	3.5 V		14.0 V								-14.0 V					11			
		31				14.0 V								-14.0 V		3.5 V		12			
		32					14.0 V								-14.0 V	3.5 V		13			
	$I_{S(OFF)}$	33	3.5 V	-14.0 V								14.0 V						2			
		34	3.5 V		-14.0 V								14.0 V					3			
		35				-14.0 V								14.0 V		3.5 V		4			
		36					-14.0 V								14.0 V	3.5 V		5			
		37	3.5 V	14.0 V								-14.0 V						2			
		38	3.5 V		14.0 V								-14.0 V					3			
		39				14.0 V								-14.0 V		3.5 V		4			
		40					14.0 V								-14.0 V	3.5 V		5			
	I_{IL}	41	0.0 V															1	-1		uA
	I_{IL}	42														0.0 V		14	-1		
	I_{IH}	43	15.0 V															1		1	
		44														15.0 V		14		1	
	$+I_{CC}$	45	0.0 V													0.0 V		6		0.01	mA
	$+I_{CC}$	46	15.0 V													15.0 V		6		0.01	
	$-I_{CC}$	47	0.0 V													0.0 V		7	-0.01		
	$-I_{CC}$	48	15.0 V													15.0 V		7	-0.01		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
2 T_A = 125°C	R_{DS}	49	11.0 V	10 mA				15.0 V	-15.0 V	GND		-10.0 V					None	2		-9.25	V 2/
		50	11.0 V		10 mA								-10.0 V					3		-9.25	
		51				10 mA								-10.0 V		11.0 V		4		-9.25	
		52					10 mA								-10.0 V	11.0 V		5		-9.25	
		53	11.0 V	-10 mA								10.0 V						2	9.25		
		54	11.0 V		-10 mA								10.0 V					3	9.25		
		55				-10 mA								10.0 V		11.0 V		4	9.25		
		56					-10 mA								10.0 V	11.0 V		5	9.25		
		57	11.0 V	10 mA				10.0 V	-10.0 V			-7.5 V						2		-6.5	
		58	11.0 V		10 mA								-7.5 V					3			
		59				10 mA								-7.5 V		11.0 V		4			
		60					10 mA								-7.5 V	11.0 V		5			
		61	11.0 V	-10 mA								7.5 V						2	6.5		
		62	11.0 V		-10 mA								7.5 V					3			
		63				-10 mA								7.5 V		11.0 V		4			
		64					-10 mA								7.5 V	11.0 V		5			
	$I_{D(ON)}$	65	11.0 V	14.0 V				15.0 V	-15.0 V			14.0 V					K10	2	-100	100	nA
		66	11.0 V		14.0 V								14.0 V				K11	3			
		67				14.0 V								14.0 V		11.0 V	K12	4			
		68					14.0 V								14.0 V	11.0 V	K13	5			
		69	11.0 V	-14.0 V								-14.0 V					K10	2	-200	200	
		70	11.0 V		-14.0 V								-14.0 V				K11	3			
		71				-14.0 V								-14.0 V		11.0 V	K12	4			
		72					-14.0 V								-14.0 V	11.0 V	K13	5			
	$I_{D(OFF)}$	73	3.5 V	-14.0 V								14.0 V					None	10	-100	100	
		74	3.5 V		-14.0 V								14.0 V					11			
		75				-14.0 V								14.0 V		3.5 V		12			
		76					-14.0 V								14.0 V	3.5 V		13			
		77	3.5 V	14.0 V								-14.0 V						10			
		78	3.5 V		14.0 V								-14.0 V					11			
		79				14.0 V								-14.0 V		3.5 V		12			
		80					14.0 V								-14.0 V	3.5 V		13			
	$I_{S(OFF)}$	81	3.5 V	-14.0 V								14.0 V						2			
		82	3.5 V		-14.0 V								14.0 V					3			
		83				-14.0 V								14.0 V		3.5 V		4			
		84					-14.0 V								14.0 V	3.5 V		5			
		85	3.5 V	14.0 V								-14.0 V						2			
		86	3.5 V		14.0 V								-14.0 V					3			
		87				14.0 V								-14.0 V		3.5 V		4			
		88					14.0 V								-14.0 V	3.5 V		5			
	I_{IL}	89	0.0 V															1	-1		μA
	I_{IL}	90														0.0 V		14	-1		
	I_{IH}	91	15.0 V															1		1	
		92														15.0 V		14		1	
	$+I_{CC}$	93	0.0 V													0.0 V		6		0.1	mA
	$+I_{CC}$	94	15.0 V													15.0 V		6		0.1	
	$-I_{CC}$	95	0.0 V													0.0 V		7	-0.1		
	$-I_{CC}$	96	15.0 V													15.0 V		7	-0.1		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
3	R_{DS}	97	11.0 V	10 mA				15.0 V	-15.0 V	GND		-10.0 V					None	2		-9.5	V 2/
T_A = -55°C		98	11.0 V		10 mA								-10.0 V					3		-9.5	
		99				10 mA								-10.0 V		11.0 V		4		-9.5	
		100					10 mA								-10.0 V	11.0 V		5		-9.5	
		101	11.0 V	-10 mA								10.0 V						2	9.5		
		102	11.0 V		-10 mA								10.0 V					3	9.5		
		103				-10 mA								10.0 V		11.0 V		4	9.5		
		104					-10 mA								10.0 V	11.0 V		5	9.5		
		105	11.0 V	10 mA				10.0 V	-10.0 V			-7.5 V						2		-6.8	
		106	11.0 V		10 mA								-7.5 V					3			
		107				10 mA								-7.5 V		11.0 V		4			
		108					10 mA								-7.5 V	11.0 V		5			
		109	11.0 V	-10 mA								7.5 V						2	6.8		
		110	11.0 V		-10 mA								7.5 V					3			
		111				-10 mA								7.5 V		11.0 V		4			
		112					-10 mA								7.5 V	11.0 V		5			
	$I_{D(ON)}$	113	11.0 V	14.0 V				15.0 V	-15.0 V			14.0 V					K10	2	-100	100	nA
		114	11.0 V		14.0 V								14.0 V				K11	3			
		115				14.0 V								14.0 V		11.0 V	K12	4			
		116					14.0 V								14.0 V	11.0 V	K13	5			
		117	11.0 V	-14.0 V								-14.0 V					K10	2	-200	200	
		118	11.0 V		-14.0 V								-14.0 V				K11	3			
		119				-14.0 V								-14.0 V		11.0 V	K12	4			
		120					-14.0 V								-14.0 V	11.0 V	K13	5			
	$I_{D(OFF)}$	121	3.5 V	-14.0 V								14.0 V					None	10	-100	100	
		122	3.5 V		-14.0 V								14.0 V					11			
		123				-14.0 V								14.0 V		3.5 V		12			
		124					-14.0 V								14.0 V	3.5 V		13			
		125	3.5 V	14.0 V								-14.0 V						10			
		126	3.5 V		14.0 V								-14.0 V					11			
		127				14.0 V								-14.0 V		3.5 V		12			
		128					14.0 V								-14.0 V	3.5 V		13			
	$I_{S(OFF)}$	129	3.5 V	-14.0 V								14.0 V						2			
		130	3.5 V		-14.0 V								14.0 V					3			
		131				-14.0 V								14.0 V		3.5 V		4			
		132					-14.0 V								14.0 V	3.5 V		5			
		133	3.5 V	14.0 V								-14.0 V						2			
		134	3.5 V		14.0 V								-14.0 V					3			
		135				14.0 V								-14.0 V		3.5 V		4			
		136					14.0 V								-14.0 V	3.5 V		5			
	I_{IL}	137	0.0 V															1	-1		µA
	I_{IL}	138														0.0 V		14	-1		
	I_{IH}	139	15.0 V															1		1	
		140														15.0 V		14		1	
	$+I_{CC}$	141	0.0 V													0.0 V		6		0.01	mA
	$+I_{CC}$	142	15.0 V													15.0 V		6		0.01	
	$-I_{CC}$	143	0.0 V													0.0 V		7	-0.01		
	$-I_{CC}$	144	15.0 V													15.0 V		7	-0.01		

See footnotes at end of table.

Source: https://assist.dla.mil Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
4	V_{CTE}	145	IN 3/	GND				15.0 V	-15.0 V	GND							K2	10		15	mV
T_A = 25°C		146	IN 3/		GND												K4	11			
		147				GND										IN 3/	K5	12			
		148					GND									IN 3/	K3	13			
7	V_{CT}	149	11.0 V	IN 4/													K1	11		3.16	mV_{p-p}
T_A = 25°C		150	3.5 V		IN 4/												K1	10		3.16	
		151				IN 4/										11.0 V	K1	13		3.16	
		152					IN 4/									3.5 V	K1	12		3.16	
			$dB_{CT} = -20 \log (V_{OUT}/V_{IN})$																50		dB
	V_{ISO}	153	3.5 V	IN 4/				15.0 V	-15.0 V	GND							K1	10		3.16	mV_{p-p}
		154	11.0 V		IN 4/												K1	11		3.16	
		155				IN 4/										3.5 V	K1	12		3.16	
		156					IN 4/									11.0 V	K1	13		3.16	
			$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$																50		dB
9	t_{ON}	157	IN	IN				15.0 V	-15.0 V	GND		OUT					K6	2 to 10		250	ns
T_A = 25°C		158	IN		IN								OUT				K8	3 to 11			
		159				IN								OUT		IN	K9	4 to 12			
		160					IN								OUT	IN	K7	5 to 13			
	t_{OFF}	161	IN	IN								OUT					K6	2 to 10		150	
		162	IN		IN								OUT				K8	3 to 11			
		163				IN								OUT		IN	K9	4 to 12			
		164					IN								OUT	IN	K7	5 to 13			
10	t_{ON}	165	IN	IN								OUT					K6	2 to 10		290	
T_A = 125°C		166	IN		IN								OUT				K8	3 to 11			
		167				IN								OUT		IN	K9	4 to 12			
		168					IN								OUT	IN	K7	5 to 13			
	t_{OFF}	169	IN	IN								OUT					K6	2 to 10		160	
		170	IN		IN								OUT				K8	3 to 11			
		171				IN								OUT		IN	K9	4 to 12			
		172					IN								OUT	IN	K7	5 to 13			
11	t_{ON}	173	IN	IN								OUT					K6	2 to 10		225	
T_A = -55°C		174	IN		IN								OUT				K8	3 to 11			
		175				IN								OUT		IN	K9	4 to 12			
		176					IN								OUT	IN	K7	5 to 13			
	t_{OFF}	177	IN	IN								OUT					K6	2 to 10		140	
		178	IN		IN								OUT				K8	3 to 11			
		179				IN								OUT		IN	K9	4 to 12			
		180					IN								OUT	IN	K7	5 to 13			
12	C_{C1}	181	0.0 V														None	1		6	pf
T_A = 25°C		182														0.0 V		14		6	
	C_{C2}	183	15.0 V															1		3.5	
		184														15.0 V		14		3.5	
	C_{IS}	185																2		14	
		186																3			
		187																4			
		188																5			
	C_{OS}	189																10			
		190																11			
		191																12			
		192																13			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
1 T_A = 25°C	R_{DS}	1	11.0 V	10 mA				15.0 V	-15.0 V	GND		-10.0 V					None	2		-9.5	V 2/
		2	3.5 V		10 mA								-10.0 V					3		-9.5	
		3				10 mA								-10.0 V		11.0 V		4		-9.5	
		4					10 mA								-10.0 V	3.5 V		5		-9.5	
		5	11.0 V	-10 mA								10.0 V						2	9.5		
		6	3.5 V		-10 mA								10.0 V					3	9.5		
		7				-10 mA								10.0 V		11.0 V		4	9.5		
		8					-10 mA								10,0 V	3.5 V		5	9.5		
		9	11.0 V	10 mA				10.0 V	-10.0 V			-7.5 V						2		-6.8	
		10	3.5 V		10 mA								-7.5 V					3			
		11				10 mA								-7.5 V		11.0 V		4			
		12					10 mA								-7.5 V	3.5 V		5			
		13	11.0 V	-10 mA								7.5 V						2	6.8		
		14	3.5 V		-10 mA								7.5 V					3			
		15				-10 mA								7.5 V		11.0 V		4			
		16					-10 mA								7.5 V	3.5 V		5			
	$I_{D(ON)}$	17	11.0 V	14.0 V				15.0 V	-15.0 V			14.0 V					K10	2	-1	1	nA
		18	3.5 V		14.0 V								14.0 V				K11	3	-1	1	
		19				14.0 V								14.0 V		11.0 V	K12	4	-1	1	
		20					14.0 V								14.0 V	3.5 V	K13	5	-1	1	
		21	11.0 V	-14.0 V								-14.0 V					K10	2	-2	2	
		22	3.5 V		-14.0 V								-14.0 V				K11	3	-2	2	
		23				-14.0 V								-14.0 V		11.0 V	K12	4	-2	2	
		24					-14.0 V								-14.0 V	3.5 V	K13	5	-2	2	
	$I_{D(OFF)}$	25	3.5 V	-14.0 V								14.0 V					None	10	-1	1	
		26	11.0 V		-14.0 V								14.0 V					11			
		27				-14.0 V								14.0 V		3.5 V		12			
		28					-14.0 V								14.0 V	11.0 V		13			
		29	3.5 V	14.0 V								-14.0 V						10			
		30	11.0 V		14.0 V								-14.0 V					11			
		31				14.0 V								-14.0 V		3.5 V		12			
		32					14.0 V								-14.0 V	11.0 V		13			
	$I_{S(OFF)}$	33	3.5 V	-14.0 V								14.0 V						2			
		34	11.0 V		-14.0 V								14.0 V					3			
		35				-14.0 V								14.0 V		3.5 V		4			
		36					-14.0 V								14.0 V	11.0 V		5			
		37	3.5 V	14.0 V								-14.0 V						2			
		38	11.0 V		14.0 V								-14.0 V					3			
		39				14.0 V								-14.0 V		3.5 V		4			
		40					14.0 V								-14.0 V	11.0 V		5			
	I_{IL}	41	0.0 V															1	-1		μA
	I_{IL}	42														0.0 V		14	-1		
	I_{IH}	43	15.0 V															1		1	
		44														15.0 V		14		1	
	$+I_{CC}$	45	0.0 V													0.0 V		6		0.01	mA
	$+I_{CC}$	46	15.0 V													15.0 V		6		0.01	
	$-I_{CC}$	47	0.0 V													0.0 V		7	-0.01		
	$-I_{CC}$	48	15.0 V													15.0 V		7	-0.01		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
2 T_A = 125°C	R_{DS}	49	11.0 V	10 mA				15.0 V	-15.0 V	GND		-10.0 V					None	2		-9.25	V 2/
		50	3.5 V		10 mA								-10.0 V					3		-9.25	
		51				10 mA								-10.0 V		11.0 V		4		-9.25	
		52					10 mA								-10.0 V	3.5 V		5		-9.25	
		53	11.0 V	-10 mA								10.0 V						2	9.25		
		54	3.5 V		-10 mA								10.0 V					3	9.25		
		55				-10 mA								10.0 V		11.0 V		4	9.25		
		56					-10 mA								10.0 V	3.5 V		5	9.25		
		57	11.0 V	10 mA				10.0 V	-10.0 V			-7.5 V						2		-6.5	
		58	3.5 V		10 mA								-7.5 V					3			
		59				10 mA								-7.5 V		11.0 V		4			
		60					10 mA								-7.5 V	3.5 V		5			
		61	11.0 V	-10 mA								7.5 V						2	6.5		
		62	3.5 V		-10 mA								7.5 V					3			
		63				-10 mA								7.5 V		11.0 V		4			
		64					-10 mA								7.5 V	3.5 V		5			
	$I_{D(ON)}$	65	11.0 V	14.0 V				15.0 V	-15.0 V			14.0 V						2	-100	100	nA
		66	3.5 V		14.0 V								14.0 V				K10	3	-100	100	
		67				14.0 V								14.0 V		11.0 V	K11	4	-100	100	
		68					14.0 V								14.0 V	3.5 V	K12	5	-100	100	
		69	11.0 V	-14.0 V								-14.0 V					K13	2	-200	200	
		70	3.5 V		-14.0 V								-14.0 V				K10	3	-200	200	
		71				-14.0 V								-14.0 V		11.0 V	K11	4	-200	200	
		72					-14.0 V								-14.0 V	3.5 V	K12	5	-200	200	
																	K13				
	$I_{D(OFF)}$	73	3.5 V	-14.0 V								14.0 V						10	-100	100	
		74	11.0 V		-14.0 V								14.0 V				None	11			
		75				-14.0 V								14.0 V		3.5 V		12			
		76					-14.0 V								14.0 V	11.0 V		13			
		77	3.5 V	14.0 V								-14.0 V						10			
		78	11.0 V		14.0 V								-14.0 V					11			
		79				14.0 V								-14.0 V		3.5 V		12			
		80					14.0 V								-14.0 V	11.0 V		13			
	$I_{S(OFF)}$	81	3.5 V	-14.0 V								14.0 V						2			
		82	11.0 V		-14.0 V								14.0 V					3			
		83				-14.0 V								14.0 V		3.5 V		4			
		84					-14.0 V								14.0 V	11.0 V		5			
		85	3.5 V	14.0 V								-14.0 V						2			
		86	11.0 V		14.0 V								-14.0 V					3			
		87				14.0 V								-14.0 V		3.5 V		4			
		88					14.0 V								-14.0 V	11.0 V		5			
	I_{IL}	89	0.0 V															1	-1		µA
	I_{IL}	90														0.0 V		14	-1		
	I_{IH}	91	15.0 V															1		1	
		92														15.0 V		14		1	
	$+I_{CC}$	93	0.0 V													0.0 V		6		0.1	mA
	$+I_{CC}$	94	15.0 V													15.0 V		6		0.1	
	$-I_{CC}$	95	0.0 V													0.0 V		7	-0.1		
	$-I_{CC}$	96	15.0 V													15.0 V		7	-0.1		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
3	R_{DS}	97	11.0 V	10 mA				15.0 V	-15.0 V	GND		-10.0 V					None	2		-9.5	V 2/
T_A = -55°C		98	3.5 V		10 mA								-10.0 V					3		-9.5	
		99				10 mA								-10.0 V		11.0 V		4		-9.5	
		100					10 mA								-10.0 V	3.5 V		5		-9.5	
		101	11.0 V	-10 mA								10.0 V						2	9.5		
		102	3.5 V		-10 mA								10.0 V					3	9.5		
		103				-10 mA								10.0 V		11.0 V		4	9.5		
		104					-10 mA								10.0 V	3.5 V		5	9.5		
		105	11.0 V	10 mA				10.0 V	-10.0 V			-7.5 V						2		-6.8	
		106	3.5 V		10 mA								-7.5 V					3			
		107				10 mA								-7.5 V		11.0 V		4			
		108					10 mA								-7.5 V	3.5 V		5			
		109	11.0 V	-10 mA								7.5 V						2	6.8		
		110	3.5 V		-10 mA								7.5 V					3			
		111				-10 mA								7.5 V		11.0 V		4			
		112					-10 mA								7.5 V	3.5 V		5			
	$I_{D(ON)}$	113	11.0 V	14.0 V				15.0 V	-15.0 V			14.0 V					K10	2	-100	100	nA
		114	3.5 V		14.0 V								14.0 V				K11	3			
		115				14.0 V								14.0 V		11.0 V	K12	4			
		116					14.0 V								14.0 V	3.5 V	K13	5			
		117	11.0 V	-14.0 V								-14.0 V					K10	2	-200	200	
		118	3.5 V		-14.0 V								-14.0 V				K11	3			
		119				-14.0 V								-14.0 V		11.0 V	K12	4			
		120					-14.0 V								-14.0 V	3.5 V	K13	5			
	$I_{D(OFF)}$	121	3.5 V	-14.0 V								14.0 V					None	10	-100	100	
		122	11.0 V		-14.0 V								14.0 V					11			
		123				-14.0 V								14.0 V		3.5 V		12			
		124					-14.0 V								14.0 V	11.0 V		13			
		125	3.5 V	14.0 V								-14.0 V						10			
		126	11.0 V		14.0 V								-14.0 V					11			
		127				14.0 V								-14.0 V		3.5 V		12			
		128					14.0 V								-14.0 V	11.0 V		13			
	$I_{S(OFF)}$	129	3.5 V	-14.0 V								14.0 V						2			
		130	11.0 V		-14.0 V								14.0 V					3			
		131				-14.0 V								14.0 V		3.5 V		4			
		132					-14.0 V								14.0 V	11.0 V		5			
		133	3.5 V	14.0 V								-14.0 V						2			
		134	11.0 V		14.0 V								-14.0 V					3			
		135				14.0 V								-14.0 V		3.5 V		4			
		136					14.0 V								-14.0 V	11.0 V		5			
	I_{IL}	137	0.0 V															1	-1		μA
	I_{IL}	138														0.0 V		14	-1		
	I_{IH}	139	15.0 V															1		1	
		140														15.0 V		14		1	
	$+I_{CC}$	141	0.0 V													0.0 V		6		0.01	mA
	$+I_{CC}$	142	15.0 V													15.0 V		6		0.01	
	$-I_{CC}$	143	0.0 V													0.0 V		7	-0.01		
	$-I_{CC}$	144	15.0 V													15.0 V		7	-0.01		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
4 T_A = 25°C	V_{CTE}	145	IN 3/	GND				15.0 V	-15.0 V	GND							K2	10		15	mV
		146	IN 3/		GND												K4	11			
		147				GND										IN 3/	K5	12			
		148					GND									IN 3/	K3	13			
7 T_A = 25°C	V_{CT}	149	11.0 V	IN 4/													K1	11		3.16	mV_{p-p}
		150	3.5 V		IN 4/												K1	10		3.16	mV_{p-p}
		151				IN 4/										11.0 V	K1	13		3.16	mV_{p-p}
		152					IN 4/									3.5 V	K1	12		3.16	mV_{p-p}
							$dB_{CT} = -20 \log (V_{OUT}/V_{IN})$												50		dB
	V_{ISO}	153	3.5 V	IN 4/				15.0 V	-15.0 V	GND							K1	10		3.16	mV_{p-p}
		154	11.0 V		IN 4/												K1	11		3.16	
		155				IN 4/										3.5 V	K1	12		3.16	
		156					IN 4/									11.0 V	K1	13		3.16	
							$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$												50		dB
9 T_A = 25°C	t_{ON}	157	IN	IN				15.0 V	-15.0 V	GND		OUT					K6	2 to 10		250	ns
		158	IN		IN								OUT				K8	3 to 11			
		159				IN								OUT		IN	K9	4 to 12			
		160					IN								OUT	IN	K7	5 to 13			
	t_{OFF}	161	IN	IN								OUT					K6	2 to 10		150	
		162	IN		IN								OUT				K8	3 to 11			
		163				IN								OUT		IN	K9	4 to 12			
		164					IN								OUT	IN	K7	5 to 13			
10 T_A = 125°C	t_{ON}	165	IN	IN								OUT					K6	2 to 10		290	
		166	IN		IN								OUT				K8	3 to 11			
		167				IN								OUT		IN	K9	4 to 12			
		168					IN								OUT	IN	K7	5 to 13			
	t_{OFF}	169	IN	IN								OUT					K6	2 to 10		160	
		170	IN		IN								OUT				K8	3 to 11			
		171				IN								OUT		IN	K9	4 to 12			
		172					IN								OUT	IN	K7	5 to 13			
11 T_A = -55°C	t_{ON}	173	IN	IN								OUT					K6	2 to 10		225	
		174	IN		IN								OUT				K8	3 to 11			
		175				IN								OUT		IN	K9	4 to 12			
		176					IN								OUT	IN	K7	5 to 13			
	t_{OFF}	177	IN	IN								OUT					K6	2 to 10		140	
		178	IN		IN								OUT				K8	3 to 11			
		179				IN								OUT		IN	K9	4 to 12			
		180					IN								OUT	IN	K7	5 to 13			
12 T_A = 25°C	C_{C1}	181	0.0 V														None	1		6	pf
		182														0.0 V		14		6	
	C_{C2}	183	15.0 V															1		3.5	
		184														15.0 V		14		3.5	
	C_{IS}	185																2		12	
		186																3			
		187																4			
		188																5			
	C_{OS}	189																10			
		190																11			
		191																12			
		192																13			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 -Continued.

Subgroup	Symbol	Test no.	Adapter pin number														Relays energized	Measured pin no.	Limits		Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14			Min	Max	
			IN_1	S_1	S_3	S_2	S_4	$+V_{CC}$	$-V_{CC}$	GND	NC	D_1	D_3	D_2	D_4	IN_2					
13	t_D	193	IN	IN	IN												K6,K14	11	20		ns
T_A = -55°C		194	IN	IN	IN												K6,K14	11	↓		↓
↓		195				IN	IN									IN	K7,K15	12			
		196				IN	IN									IN	K7,K15	12			

1/ The test circuits used with table III are shown in figures 19, 20, and 21. The waveforms on figure 11 apply to all device types as specified within table IV (see tests for t_{ON} and t_{OFF}). The waveforms in figure 15 apply to device types 02, 04, 06, and 08 as specified within table III.

2/ R_{DS} may be measured differentially with respect to VA. In case of differentially measured voltages, the table III limits representing voltage drop across the tested switch must be maintained.

3/ The input pulse generator shall have the following characteristics: V_{GEN} = 0-4 V for devices 01-04; V_{GEN} = 0-15 V for devices 05-08; Rise time/fall time ≤20 ns; PRR = 1 kHz at 50 percent duty cycle.

4/ The input generator shall have the following characteristics: V_{GEN} = 1 V_{p-p} at 1 MHz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

4.3 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test (method 1015 of MIL-STD-883).
   1. Static tests (test condition A) using the circuit shown on figure 16 or equivalent. Ambient temperature (T_A) shall be 125°C minimum. Test duration for each static test shall be 24 hours minimum for class S devices and 160 hours minimum for class B devices.
   2. Dynamic test (for class S only) (test condition D or E) using the circuit shown on figure 17 or equivalent. Ambient temperature (T_A) shall be 125°C minimum. Test duration shall be 240 hours minimum.
   3. At the manufacturer's option, accelerated testing may be performed using the circuit shown on figure 18.

NOTE: If accelerated high-temperature test conditions are used, the device manufacturer shall ensure that at least 85% of the applied voltage is dropped across the device at temperature. The device is not considered functional under accelerated test conditions.

b. Reverse bias burn-in (method 1015 of MIL-STD-883). Required for classes S and B devices using the circuit shown on figure 16. Ambient temperature (T_A) shall be 125°C minimum. Duration for reverse bias test shall be 24 hours minimum for class S devices and 160 hours minimum for class B devices.

c. Interim and final electrical test parameters shall be as specified in table II, herein.

d. For class S devices, post dynamic burn-in, or class B devices, post static burn-in, electrical parameter measurements may, at the manufacturer's option, be performed separately or included in the final electrical parameter measurements.

e. Percent defective allowable (PDA) - The PDA for class S devices shall be as specified in MIL-M-38510. The PDA is specified as 10 percent for class B devices based on failures from group A, subgroup 1 test after cooldown as final electrical test in accordance with method 5004 of MIL-STD-883 and with no intervening electrical measurements. If interim electrical parameter tests are performed prior to burn-in, failures resulting from pre burn-in screening may be excluded from the PDA. If interim electrical parameter tests prior to burn-in are omitted, then all screening failures shall be included in the PDA. The verified failures of group A, subgroup 1 after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determine the percent defective for that lot, and the lot shall be accepted or rejected based on the PDA for the applicable device class. Those devices whose measured characteristics after burn-in exceed specified electrical parameter limits are defective and shall be removed from the lot.

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510 and as specified herein. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Subgroups 5, 6, and 8 shall be omitted.
b. Tests shall be as specified in table II herein.
c. Subgroups 12 and 13 shall be added to group A inspection as specified in table III herein. The LTPD for subgroup 12 shall be 5 for all classes; the LTPD for subgroup 13 shall be 5 for all classes.
d. C_X measurements shall be made only for initial qualification and after process or design changes which may affect capacitance measurements. Capacitance shall be measured between the designated terminal and ground at the frequency of 1 MHz. (See method 3012.1 of MIL-STD-883). C_{IS} and C_{OS} tests will be measured with the switch off (see 3.4.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.
b. Life test for class S shall be performed as specified in subgroup 5 of table IIa of method 5005 of MIL-STD-883 using the circuit shown on figure 18. If the alternate burn-in conditions are used, the circuit shown on figure 17 shall be used.
c. A special subgroup shall be added using an LTPD of 15 for all classes. This subgroup shall consist of a high voltage test of the input protection circuits, V_{ZAP} (see 4.5.3).

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table III herein.
b. Life tests for classes B and C (method 1005 of MIL-STD-883): Test condition C using the circuit shown on figure 17 or test condition D using the circuit shown on figure 16 or test condition F using the circuit shown on figure 18.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.
b. Subgroup 6, shall be added to group D inspection and it shall consist of the group A subgroups 4 and 7 (see table III herein).
c. During the initial qualification, subgroup 6 shall be performed on each device type to be qualified from those listed in 1.2.1 herein. After initial qualification, subgroup 6 shall be performed periodically on a single device selected from the device types previously qualified. When more than one device type was initially qualified, the single device selected shall be a different device type for each subsequent periodic inspection until all qualified device types have been inspected. The sequence of single device types shall be repeated to fulfill the periodic inspection requirement.

TABLE IV. Group C end-point electrical parameters.
(T_A = 25°C, $\pm V_{CC}$ = ±15 V)

Test	Device types 01 - 08		
	Limits		Delta
	Min.	Max	
R_{DS}	+9.50 V	+10.00 V	50 mV
R_{DS}	-10.00 V	-9.50 V	50 mV
$I_{S(OFF)}$	-1 nA	+1 nA	±0.5 nA
$I_{D(OFF)}$	-1 nA	+1 nA	±0.5 nA

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables. Electrical test circuits as prescribed herein or in the referenced test methods of MIL-STD-883 shall be acceptable. Other test circuits shall require the approval of the qualifying activity.


4.5.1 Voltage and current. All voltages given, except differential voltages, are referenced to the external zero reference level of the supply voltage. Currents given are conventional current and positive when flowing into the referenced terminal.

4.5.2 Life test cooldown procedure. When devices are measured at 25°C following application of the operating life or burn-in test condition, they shall be cooled to room temperature prior to removal of the bias.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

4.5.3 High voltage (V_{ZAP}) test of input protection circuits. Unless otherwise specified, all input terminals of the device under test (DUT) shall be subjected to a voltage pulse from a high voltage source. This destructive test shall be conducted as follows using the test circuit shown below.

a. Measure I_{IL} and I_{IH} at the inputs selected at 25°C. The test limit for each input tested shall be + 1 μA for I_{IH} and -1 μA for I_{IL} at $V_{(supply)} = \pm 15$ V.

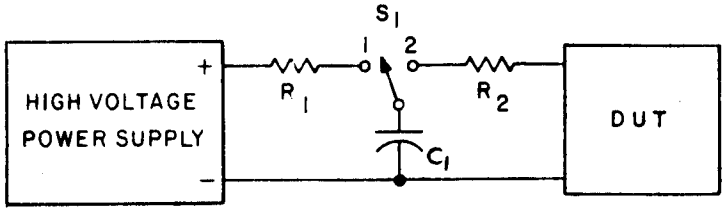

V_{ZAP} = 400 V charge on C1.
10 MΩ ≤ R1 ≤ 50 MΩ.
R2 = 1.5 kΩ.
C1 = 100 pF.
S1 = Hg-wetted "bounceless" relay.

b. V_{ZAP} is applied to the DUT in the following modes (see table V) by charging C1 to V_{ZAP} with S1 in position 1 and then switching to position 2.

TABLE V. Modes for high-voltage test.

Mode	+ Terminal	- Terminal
1	$+V_{CC}$	Input
2	Input	$-V_{CC}$

c. Within 24 hours repeat the I_{IL}, and I_{IH} measurements (see a. above) in accordance with table III. If a DUT exhibits values in excess of the specified limits after the V_{ZAP} test, it shall be classified as a failure.

4.6 Inspection of preparation for delivery. Inspection of packaging shall be in accordance with MIL-M-38510.

5. PACKAGING.

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510. The devices covered by this specification require electrostatic protection.

6. NOTES

6.1 Notes. The notes specified in MIL-M-38510 are applicable to this specification.

6.2 Intended use. Microcircuits conforming to this specification are intended for use for Government microcircuit applications (original equipment) and logistic purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

6.3 Ordering data. The contract or purchase order should specify the following:

a. Complete part number (see 1.2).
b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.
c. Requirement for certificate of compliance, if applicable.
d. Requirements for notification of change of product or process to procuring activity in addition to notification to the qualifying activity, if applicable.
e. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883), corrective action, and reporting of results, if applicable.
f. Requirements for quality assurance options.
g. Requirements for carriers, special lead lengths or lead forming, if applicable. These requirements shall not affect the part number. Unless otherwise specified, these requirements will not apply to direct purchase by or direct shipment to the Government.

6.4 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

$+V_{CC}$	Positive supply voltage
$-V_{CC}$	Negative supply voltage
$+I_{CC}$	Positive supply current
$-I_{CC}$	Negative supply current
V_L	Logic supply voltage
I_L	Logic supply current
R_{DS}	Resistance of an "ON" switch
V_D	Drain voltage
V_S	Source voltage
I_D	Drain current
I_S	Source current
$I_{D(ON)}$	Leakage current from an "ON" driver into the switch
$I_{D(OFF)}$	Leakage current into the drain terminal of an "OFF" switch
$I_{S(OFF)}$	Leakage current into the source terminal of an "OFF" switch
t_{ON}	Switching time as defined on figure 11.
t_{OFF}	Switching time as defined on figure 11.
V_{CTE}	Charge transfer error.
V_{CT}	Crosstalk between switches.
V_{ISO}	Isolation from source to drain of a closed switch

6.5 Logistic support. Lead materials and finishes (see 3.3) are interchangeable. Unless otherwise specified, microcircuits procured for Government logistic support will be procured to device class B (see 1.2.2), lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.6 Substitutability. The cross-reference information below is presented for the convenience of user. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.

ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Military device type	Generic-industry type
01	300
02	301
03	302
04	303
05	304
06	305
07	306
08	307

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - ER, MI
Navy - EC, SH
Air Force - 11, 85, 99
DLA - ES
NASA - NA

User activities:
Army - SM, AR
Navy - CG, MC, AS, OS
Air Force - 19

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-0298)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:24Z
Check the source to verify that this is the current version before use.