MILITARY SPECIFICATION

MICROCIRCUITS, LINEAR, HIGH SLEW RATE OPERATIONAL AMPLIFIERS,
MONOLITHIC SILICON

This amendment forms a part of MIL-M-38510/122A, dated 15 September 1989, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 5

4.4.1c, delete and substitute the following:

"c. Subgroup 12 shall be added to group A inspection as specified in table III herein. Subgroup 12 shall be performed for initial qualification and after major process or design changes using a sample of 15 devices with no failure allowed."

PAGE 7

TABLE I, Input bias current ($+I_{IB}$), T_A = +25° only, device types 07 and 08 only, delete and substitute the following:

"

Input bias current 2/ 4/	$+I_{IB}$	$+T_A$ = +25°C $+V_{CM}$ = -10 V, 0 V	07, 08	-.2	+.2	nA
		$+T_A$ = +25°C $+V_{CM}$ = +10 V		-1.0	+1.0	

"

PAGE 8

TABLE I, Input bias current ($-I_{IB}$), T_A = +25° only, device types 07 and 08 only, delete and substitute the following:

"

Input bias current 2/ 4/	$-I_{IB}$	$+T_A$ = +25°C $+V_{CM}$ = -10 V, 0 V	07, 08	-.2	+.2	nA
		$+T_A$ = +25°C $+V_{CM}$ = +10 V		-1.0	+1.0	

"


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:27Z
Check the source to verify that this is the current version before use.

PAGE 25

FIGURE 5, add the following figure:

" Device types 07 and 08

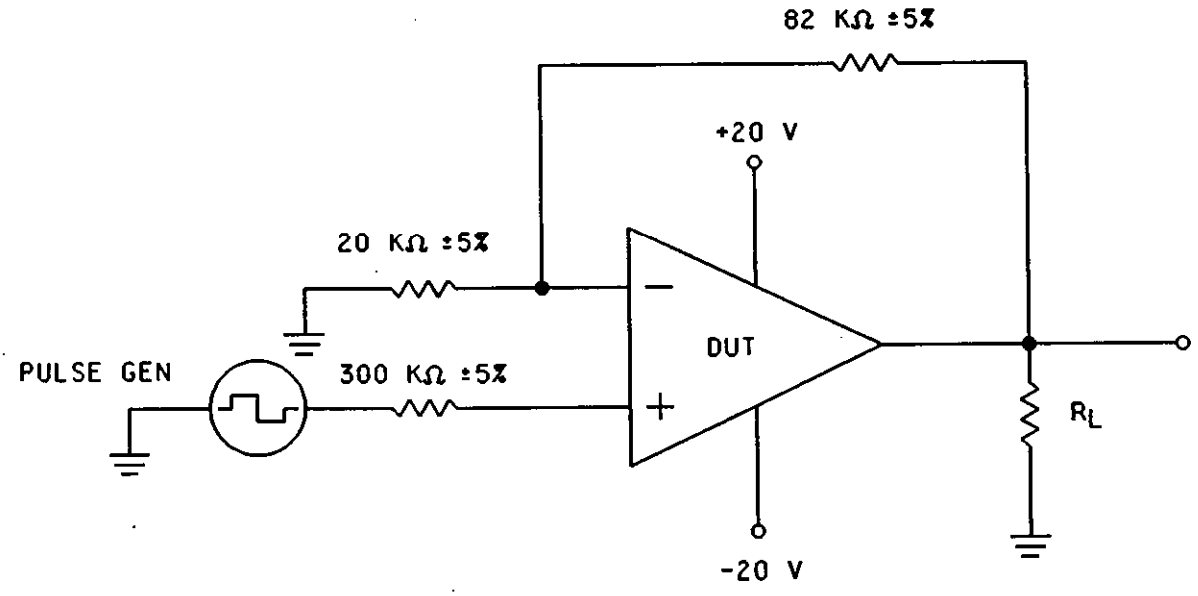

"

FIGURE 5, NOTE 1b, delete and substitute the following:

"b. ±V = 5.0 V for device types 01 through 06 and ±V = 1.0 V for device types 07 and 08."

FIGURE 5, NOTE 3, add the following sentence:

"R_L = 2 kΩ ±5% for device types 07 and 08."

PAGE 27

FIGURE 6, +PSRR, equation column, delete and substitute the following:

"+PSRR = 20 log 10 (10^4/E13-E14)".

FIGURE 6, -PSRR, equation column, delete and substitute the following:

"-PSRR = 20 log 10 (10^4/E15-E16)".

FIGURE 6, CMRR, equation column, delete and substitute the following:

"CMRR = 20 log 10 (2 x 10^4/E17-E18)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:27Z
Check the source to verify that this is the current version before use.

PAGE 30

FIGURE 6, +PSRR, equation column, delete and substitute the following:

"+PSRR = 20 log 10 (10^4/E13-E14)".

FIGURE 6, -PSRR, equation column, delete and substitute the following:

"-PSRR = 20 log 10 (10^4/E15-E16)".

FIGURE 6, CMRR, equation column, delete and substitute the following:

"CMRR = 20 log 10 (2 x 10^4/E17-E18)".

PAGE 33

FIGURE 6, +PSRR, equation column, delete and substitute the following:

"+PSRR = 20 log 10 (10^4/E13-E14)".

FIGURE 6, -PSRR, equation column, delete and substitute the following:

"-PSRR = 20 log 10 (10^4/E15-E16)".

FIGURE 6, CMRR, equation column, delete and substitute the following:

"CMRR = 20 log 10 (2 x 10^4/E17-E18)".

PAGE 37

FIGURE 6, I_{IO}, equation column: Delete "I_{IO} = (E1-E4)/1000 /1 MΩ" and substitute "I_{IO} = (E4-E1)/1000 /10 MΩ"; delete "I_{IO} = (E2-E5)/1000 /1 MΩ" and substitute "I_{IO} = (E5-E2)/1000 /10 MΩ"; delete "I_{IO} = (E3-E6)/1000 /1 MΩ" and substitute "I_{IO} = (E6-E3)/1000 /10 MΩ";

FIGURE 6, $+I_{IB}$, equation column: Delete "$+I_{IB}$ = (E1-E7)/1000 /1 MΩ" and substitute "$+I_{IB}$ = (E7-E1)/1000 /10 MΩ"; delete "$+I_{IB}$ = (E2-E8)/1000 /1 MΩ" and substitute "$+I_{IB}$ = (E8-E2)/1000 /10 MΩ"; delete "$+I_{IB}$ = (E3-E9)/1000 /1 MΩ" and substitute "$+I_{IB}$ = (E9-E3)/1000 /10 MΩ";

FIGURE 6, $-I_{IB}$, value column: Delete "E10" "E11" and "E12".

FIGURE 6, $-I_{IB}$, units column: Delete "V" three times.

FIGURE 6, $-I_{IB}$, equation column: Delete "$-I_{IB}$ = (E10-E1)/1000 /1 MΩ" and substitute "$-I_{IB}$ = (E4+E7)/1000 /10 MΩ"; delete "$-I_{IB}$ = (E11-E2)/1000 /1 MΩ" and substitute "$-I_{IB}$ = (E5+E8)/1000 /10 MΩ"; delete "$-I_{IB}$ = (E12-E3)/1000 /1 MΩ" and substitute "$-I_{IB}$ = (E6+E9)/1000 /10 MΩ";

FIGURE 6, CMRR, equation column, delete and substitute the following:

"CMRR = 20 log (20/ $\frac{E3-E2}{1000}$)"

PAGE 38

FIGURE 6, $+A_{VS}$, equation column, delete and substitute the following:

"$+A_{VS}$ = 10/(E20-E19/1000)"

FIGURE 6, $-A_{VS}$, equation column, delete and substitute the following:

"$+A_{VS}$ = 10/(E21-E19/1000)"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:27Z
Check the source to verify that this is the current version before use.

PAGE 39


FIGURE 6, NOTE 1, delete and substitute the following:

"1. At T_A = +125°C, S7 and S8 shall be closed and the factor of 1000 shall be replaced with a factor of 100 in all equations for I_{IO}, $+I_{IB}$, and $-I_{IB}$, and the factor of 10 MΩ shall be replaced with a factor of 1 MΩ in all equations for I_{IO}, $+I_{IB}$, and $-I_{IB}$. Also the units shall be nA."

PAGE 40

FIGURE 7, delete and substitute the following:

" Device type 02

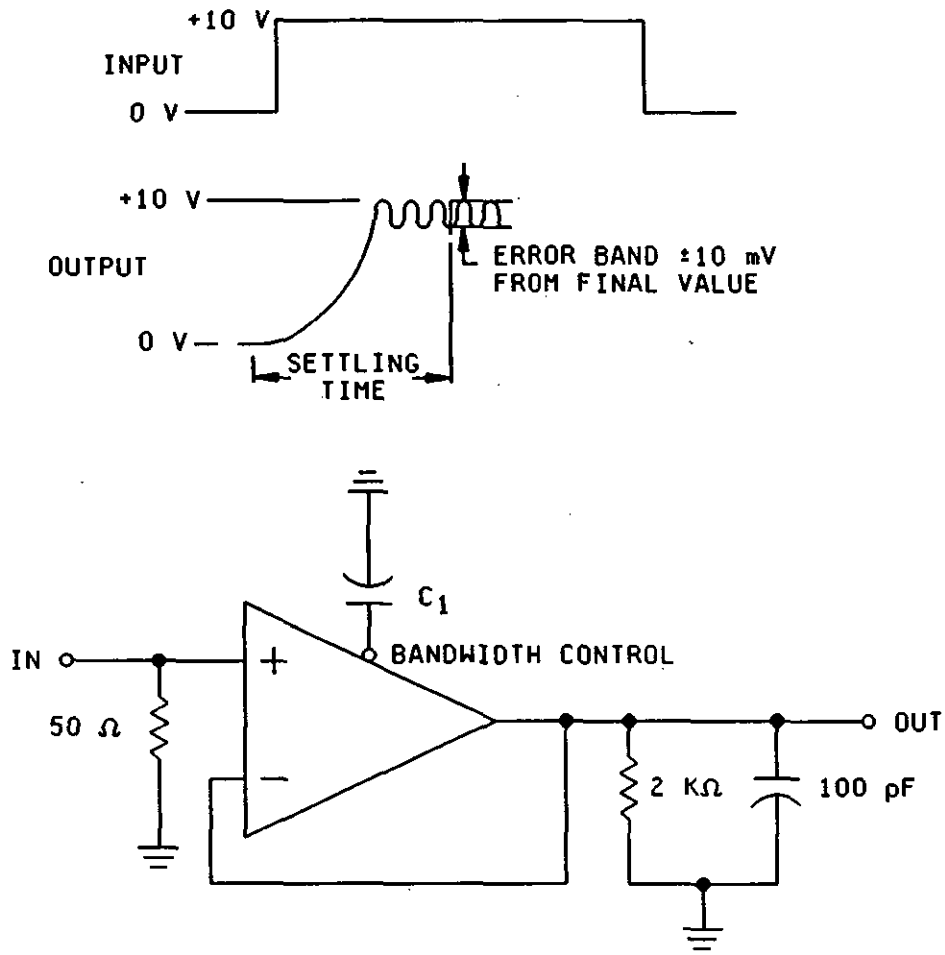


NOTE: C1 is test fixture capacitance and shall be 1.5 pF ±1.0 pF.

FIGURE 7. Settling time circuits. "

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:27Z
Check the source to verify that this is the current version before use.

FIGURE 7, delete and substitute the following:

" Device type 03

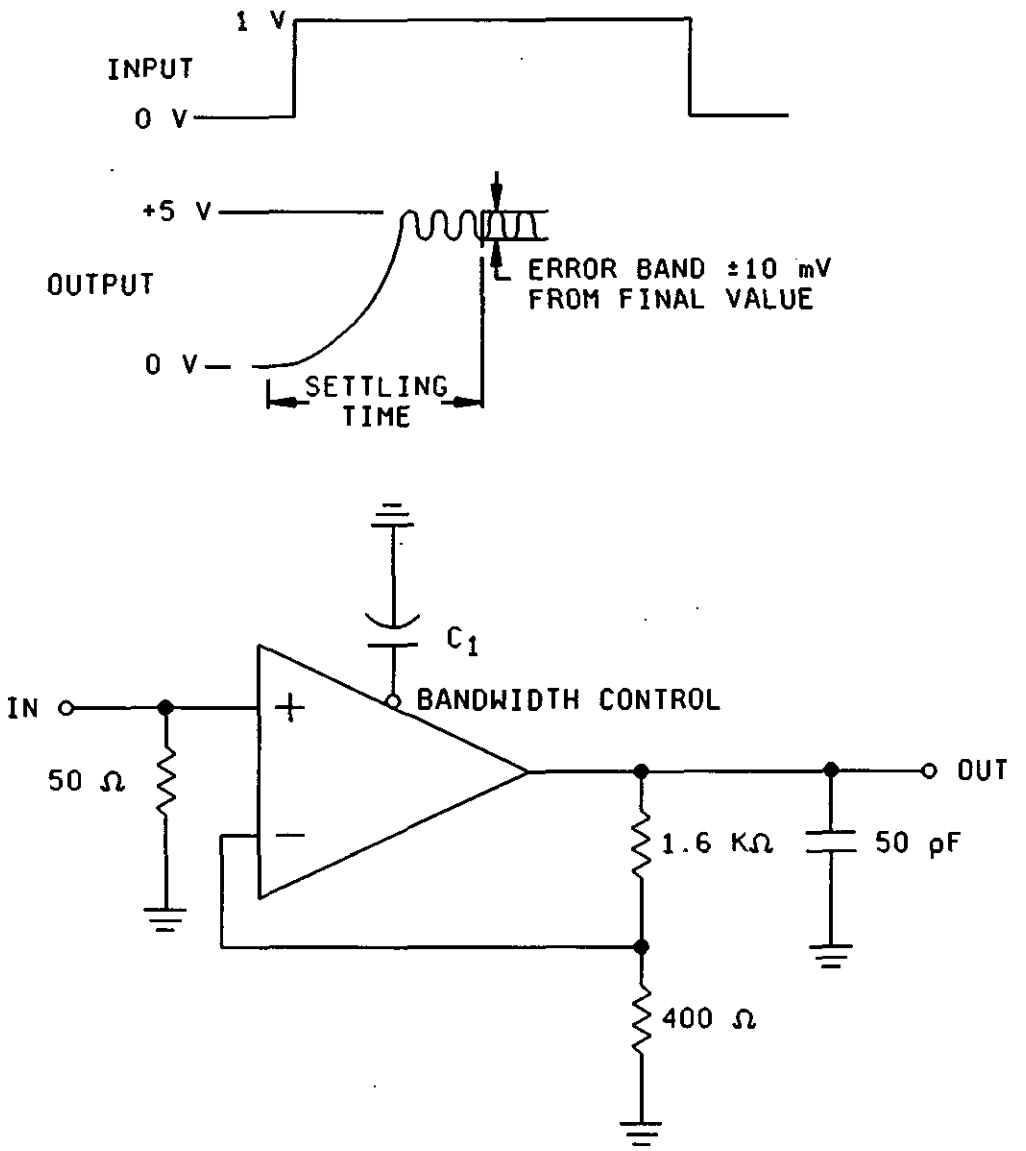


NOTE: C1 is test fixture capacitance and shall be less than 1.0 pF.

FIGURE 7. Settling time circuits - Continued. "

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:27Z
Check the source to verify that this is the current version before use.

FIGURE 7, delete and substitute the following:

" Device types 04 and 05

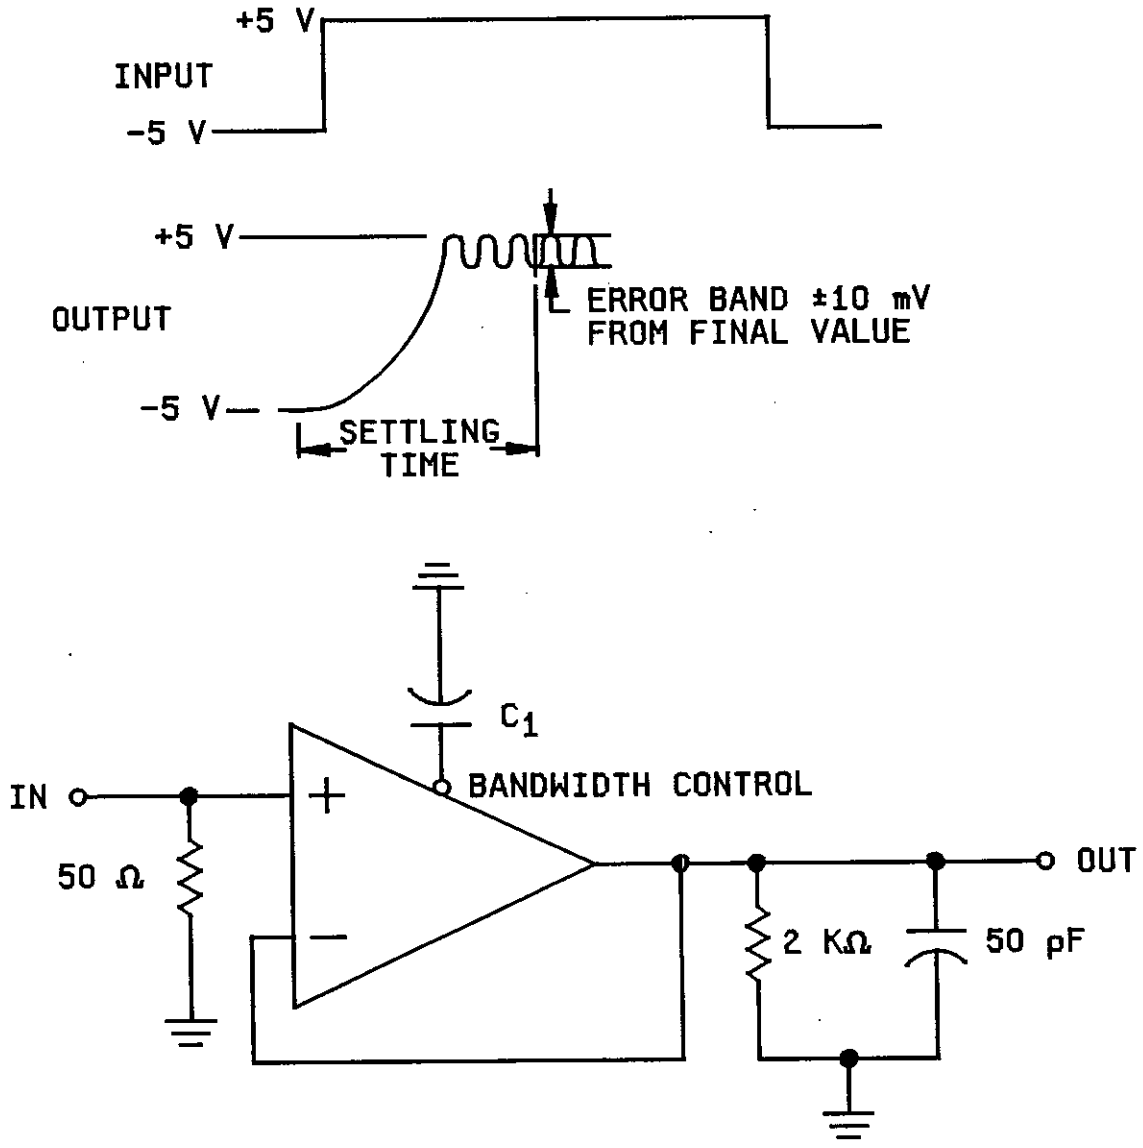


NOTE: C1 is test fixture capacitance and shall be less than 1.0 pF.

FIGURE 7. Settling time circuits - Continued. "

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:27Z
Check the source to verify that this is the current version before use.

FIGURE 7, delete and substitute the following:

" Device types 06 and 07

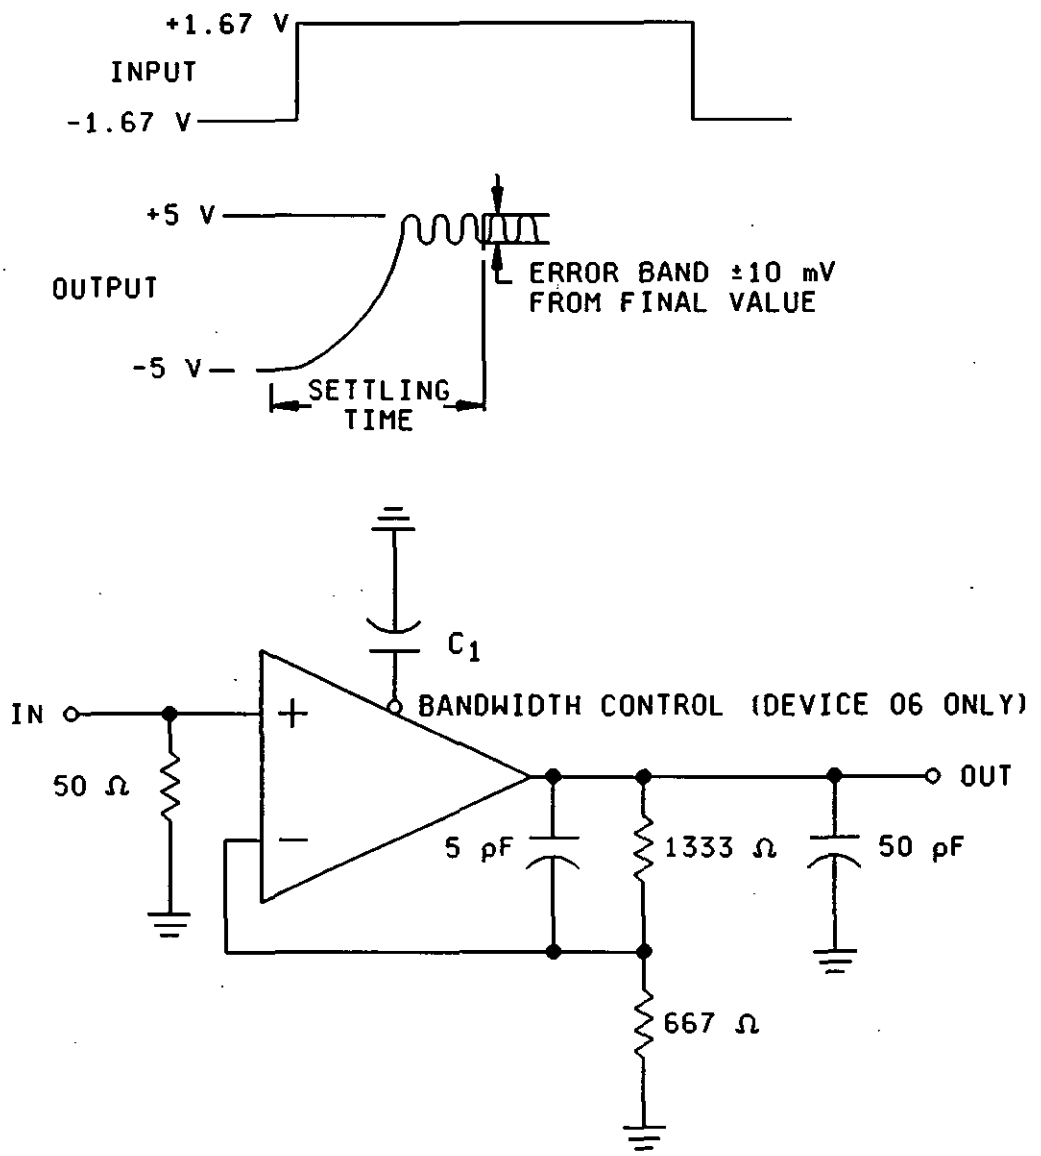

NOTE: C1 is test fixture capacitance and shall be 2.5 pF ±1.0 pF.

FIGURE 7. Settling time circuits - Continued. "

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:27Z
Check the source to verify that this is the current version before use.

PAGE 45

TABLE III, test numbers 9, 12, 27 and 30, device types 07 and 08 limits, minimum column: Delete "-0.2" and substitute "-1.0".

TABLE III, test numbers 9, 12, 27 and 30, device types 07 and 08 limits, maximum column: Delete "+0.2" and substitute "1.0".

PAGE 46

TABLE III, test numbers 45, and 48, device types 07 and 08 limits, minimum column: Delete "-0.2" and substitute "-1.0".

TABLE III, test numbers 45, and 48, device types 07 and 08 limits, maximum column: Delete "+0.2" and substitute "1.0".

PAGE 48

TABLE III, group A inspection, subgroup 12, test numbers 91 ($+t_s$) and 92 ($-t_s$), conditions column: Delete "see figure 6" and substitute "see figure 7 14/".

TABLE III, group A inspection, subgroup 12, test numbers 91 ($+t_s$) and 92 ($-t_s$), device types 05, 06, 07 and 08 limits, maximum columns: Delete "14/" and substitute "15/".

TABLE III, group A inspection, subgroup 13, test numbers 93 ($\Delta V_{IO}/\Delta T$), 94($\Delta I_{IO}/\Delta T$), 95($\Delta V_{IO}/\Delta T$), and 96 ($\Delta I_{IO}/\Delta T$) conditions column: Delete "15/" and substitute "16/".

PAGE 49

TABLE III, footnotes: Delete "14/" and "15/" in their entirety.

TABLE III, after footnote 13/ add the following footnotes:

"14/ For device types 02, 03, 04, 05 and 06, which have a bandwidth control pin, no additional external compensation capacitance shall be used.

15/ At +25°C, tests 91 and 92, $+t_s$ and $-t_s$, device type 05: 01 µS maximum, device type 06, 07, and 08: 1.1 µs maximum.

16/ Test 93 through 96, which require a read and record measurement plus a calculation, may be omitted except when subgroup 13 is being accomplished for group A sampling inspection and group b (class S) inspection."

PAGE 50

TABLE IV, footnote 1/, add the following sentence: "For device types 07 and 08, delta limits apply to the measured value of test 1, 7 and 10."

TABLE IV, after footnote 2/, add footnote 3/ as follows:

"3/ For device types 07 and 08, limits apply for tests 1, 2, 3, 7, 8, 9, 10, 11, and 12."

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:27Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC, OS, SH, TD
Air Force - 19, 85, 99
DLA - ES

Civil Agency Coordinating Activity:
NASA - NA

Preparing activity:
DLA - ES

Agent:
DLA - ES

(Project 5962-1368)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:27Z
Check the source to verify that this is the current version before use.