NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/164A
1 May 1997
SUPERSEDING
MIL-D-3943/164
9 August 1994

DETAIL SPECIFICATION SHEET

DECORATION, MEDAL OF VALOR,
BUREAU OF ALCOHOL, TOBACCO AND FIREARMS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

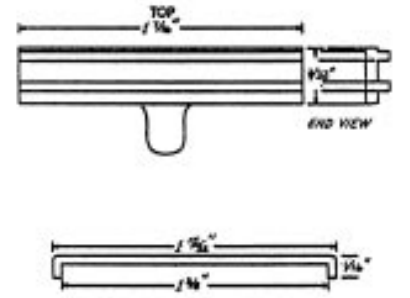

REVERSE OF THE SUSPENSION BAR

OBVERSE

REVERSE

MATERIAL: Red Brass

FINISH: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
PENDANT:
HEIGHT (To Star Point): 2-1/16 inches (5.24 cm) (REF)
WIDTH: 1-1/2 inches (3.81 cm) (REF)
THICKNESS (At Edge): 0.115 inch ± 0.010 inch (0.292 cm ± 0.025 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:12Z
Check the source to verify that this is the current version before use.

SUSPENSION BAR:
HEIGHT (Including Lug): 1/2 inch (1.27 cm) (REF)
WIDTH: 1-7/16 inches (3.65 cm) (REF)
THICKNESS (At Thickest Point): 0.100 inch ± 0.010 inch (0.254 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The lug for the reverse of the pendant shall be formed into a half circle from brass wire. The lug shall be fabricated from 0.050 inch ± 0.002 inch (0.127 cm ± 0.005 cm) nominal diameter wire with the same material and finish as the pendant. The lug shall have an outside diameter of 9/32 inch ± 1/64 inch (0.71 cm ± 0.04 cm) and shall be hard soldered to vertical center line of the back of the pendant 3/32 inch (0.24 cm) from the top on center.

3. The wires for the suspension bar shall be fabricated from 0.050 inch ± 0.002 inch (0.127 cm ± 0.005 cm) nominal diameter wire with the same material and finish as the suspension bar and hard soldered in the location shown.

4. Decoration set presentation case shall be as specified by the procuring agency.

5. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/382.

6. The lapel button shall conform to MIL-DTL-11484/223.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:12Z
Check the source to verify that this is the current version before use.