NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/164E(IH)
3 September 2024
SUPERSEDING
MIL-DTL-3943/164D(IH)
28 October 2019

DETAIL SPECIFICATION SHEET

DECORATION, MEDAL OF VALOR, BUREAU OF ALCOHOL, TOBACCO AND FIREARMS

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

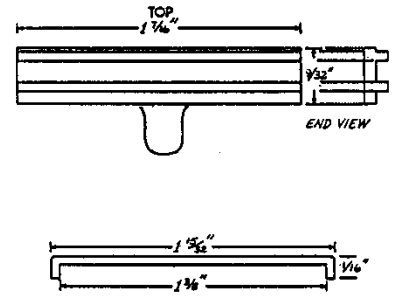

REVERSE OF THE SUSPENSION BAR



OBVERSE



REVERSE

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry Metal Finish Chip Number 8.

DIMENSIONS:
PENDANT:
HEIGHT (To star point): 2-1/16 inches (REF)
WIDTH: 1-1/2 inches (REF)
THICKNESS (At edge): 0.115 inch ± 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:12Z
Check the source to verify that this is the current version before use.

SUSPENSION BAR:
HEIGHT (Including lug): 1/2 inch (REF)
WIDTH: 1-7/16 inches (REF)
THICKNESS (At thickest point): 0.100 inch ± 0.010 inch

DECORATION SET: Decoration set presentation case shall be as specified by the procuring agency.

LUG AND SUSPENSION BAR:

1. The lug for the reverse of the pendant shall be formed into a half circle from brass wire. The lug shall be fabricated from 0.050 inch ± 0.002 inch nominal diameter wire with the same material and finish as the pendant. The lug shall have an outside diameter of 9/32 inch ± 1/64 inch and shall be hard soldered to vertical center line of the back of the pendant 3/32 inch from the top on center.

2. The wires for the suspension bar shall be fabricated from 0.050 inch ± 0.002 inch nominal diameter wire with the same material and finish as the suspension bar and hard soldered in the location shown.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/382.

3. The specification slash sheet for the lapel button is MIL-DTL-11484/223.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-270)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:12Z
Check the source to verify that this is the current version before use.