NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/57F
11 May 1999
SUPERSEDING
MIL-DTL-3943/57E
1 May 1997

DETAIL SPECIFICATION SHEET

DECORATION, DISTINGUISHED SERVICE MEDAL, NASA

Inactive for new design after 14 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

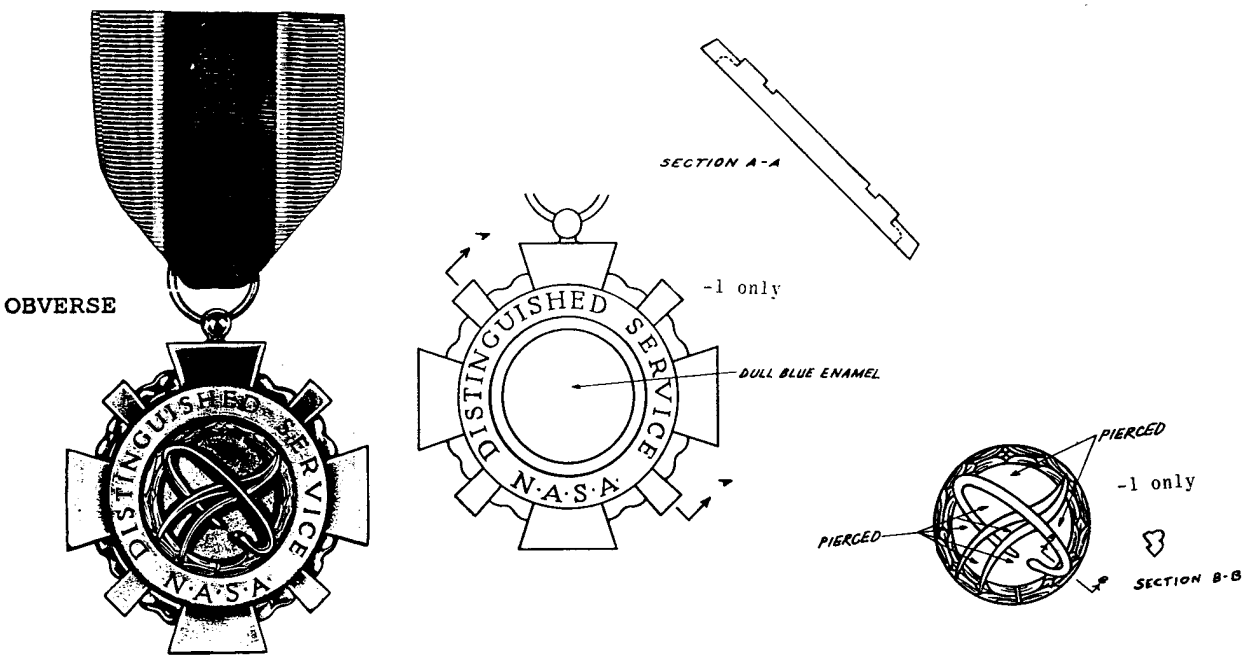

MATERIAL:

-1: Gilding Metal
-2: Red Brass

DASH NO.
-1: Regular Size
-2: Miniature Size

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.

FINISH:

-1: Hard Enameled, Gold Plated, Rose Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 20.
-2: Soft Enameled, Gold Plated, Rose Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 20.

DIMENSIONS:

PENDANT:
DIAMETER:
-1: 1-11/64 inches (REF)
-2: 13/16 inch (REF)
THICKNESS (at edge):
-1: 0.095 inch ± 0.010 inch
-2: 0.055 inch ± 0.010 inch

DEVICE:
DIAMETER:
-1: 13/16 inch (REF)
-2: N/A (See Note 6)
THICKNESS (overall):
-1: 0.085 inch ± 0.010 inch
-2: N/A (See Note 6)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Reverse to be flat, plain and suitable for engraving.

3. Enamel color shall be blue as indicated. The enamel color shall conform to TIOH Hard Enamel Color Chip Number 30 with a dull finish.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

5. The wreath for Dash -1 shall be superimposed after enameling using soft solder.

6. Dash No. -2 shall be made in one piece.

7. Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type XV, Style 1 with a Class 1 or 1A pad.

8. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/53.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.

9. The lapel button shall conform to MIL-DTL-11484/74.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0978)

Civil Agency Coordinating Activities:
NASA - NA

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.